2%6 ⇩	2%)/ .	$%3#2)04)/ .	$! 4%	"9
!		02%)-). ! 29 2% %1 3%$	20 ßeb	4ðāāL

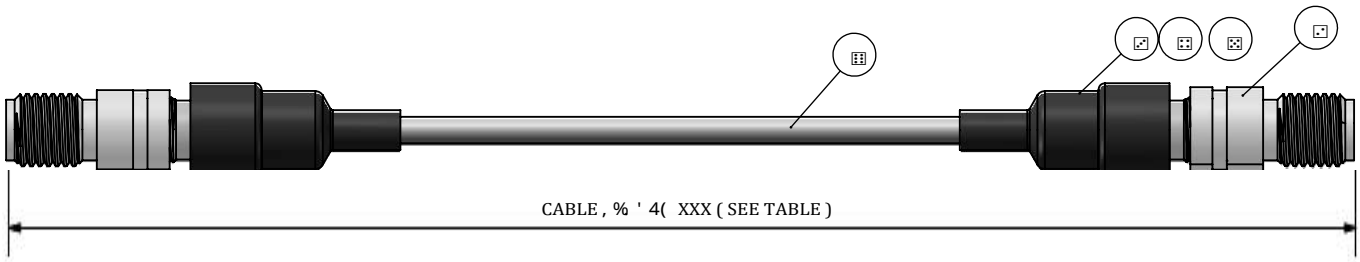

PART NUMBER	LENGTH INCHES	+/ - LENGTH	LENGTH cm	MAX VSWR UP TO 40 GHz	MAX INSERTION LOSS [dB] UP TO 40 GHz
TM7SM9FS9FS000 015	6	0.25	15	1.35:1	1.08
TM7SM9FS9FS000 020	8	0.25	20	1.35:1	1.32
TM7SM9FS9FS000 031	12	0.25	31	1.35:1	1.79
TM7SM9FS9FS000 046	18	0.25	46	1.35:1	2.50
TM7SM9FS9FS000 061	24	0.25	61	1.35:1	3.21
TM7SM9FS9FS000 076	30	0.25	76	1.35:1	3.92
TM7SM9FS9FS000 091	36	0.25	91	1.35:1	4.63
TM7SM9FS9FS000 100	39	0.25	100	1.35:1	5.03
TM7SM9FS9FS000 122	48	0.25	122	1.35:1	6.04

MAXIMUM SPECIFICATIONS ARE PRODUCT MAXIMUM INCLUDING MEASURING SYSTEM UNCERTAINTY.
NOTE: PRODUCT SPECIFICATIONS ARE VERIFIED AT 73 DEG. F, SEA LEVEL AND 20 TO 80% RELATIVE HUMIDITY.

ASSEMBLIES ELECTRICAL & MECHANICAL SPECIFICATIONS		
IMPEDANCE, NOMINAL:	50	OHMS
CABLE JACKET DIAMETER:	0.092	INCHES
TEMPERATURE RANGE:	-50 to +105	DEGREES C
MATING TORQUE:	7-10	INCH POUNDS

RoHS Compliant

	5&%/	, / 7 , / 33#/ ! 8 2! 7 #! ", %		
	-	2#5"' 43+ , +		
	-	2#5"' 43+ 0/ ,		
	! 45-	45"' 43+ $(36 , +		
	4- 3	8% ! , %#/ . . %#! ", %		
)4%	0! 24 . 5- "%2	$%3#2)04)/ .	- ! 4%2)! ,	149

☆ +%3 $)- % 3)/ . . %%$). 30%#4)/ . 88∠2%&$)- % 3)/ . & 2 2%& . , 9

$2! 7 . ⇨ 4ðāāL
#(%#+%$ ⇨
! 002/ 6%$ ⇨

CARLISLE
). 4%2#/ . . %#4 4%#(. / , / ')%3

$ðāóóı éā #ðL ı éāóí ðāó
0 ßeb éé

- ! 4%2)! , ⇨ .
0! 24 . 5- "%2 ⇨ 4- 3 × & 3 × & 3 8X8
02/ %#4 . ! - %
2&*5- 0%23

). & 2- ! 4)/ . #/ . 4!). %$ / . 4( )3 $ 2! 7). ')3 #/ . &$% 4)! , ! . $ - ! 9 ! , 3/ #/ . 4!). 02/ 02)%4! 29 #! 2,)3, %#5 34/ - %2). & 2- ! 4)/ . ⇩ $2! 7). ' #/ . 4% 4)3/ . , 9). 4% $%$ & 2 53%/ &4(%! " / 6% #534/ - %2)&9/ 5 ! 2%. / 4 4(%). 4% $%$ 2%#)0)% 4 / 2 ! 54(/ 2): %$ % 0, / 9%%/ &! " / 6%#/ - 0! . 9 . ! - %9/ 5 ! 2%(%2%' 9 . / 4)&)%$! . 9 53%$ 50,)#! 4)/ . 2%#/ . 3425#4)/ . 2 $)342)" 54)/ . / & $2! 7). '). & 2- ! 4)/ .)3 342)#4, 9 02/ ( )")44%$ ⇩

3): %
! 339
0! 24 . ! - %
$! 4! ⇨ 20 ßeb
2%6)3)/ . ⇨ !
3#! , %
$/ . / 4 3#! , % $2! 7). '
3(%%4 /&

NOTE(S):
3/ , $%2 0%2)0#*34$ 5-3). ' , %1 $ &2%%3/ , $%2 ⇩
CABLE LENGTH TOLERANCE REFER TO ISO2768-V, AND TOLERANCE VALUE MULTIPIED BY 2.

ISO2768-V (mm)					
6~30	30-120	120~400	400~1K	1K~2K	>2K
±1	±1.5	±2.5	±4	±6	±8