


GE256X64C-7933B

SIMPLIFIED DATASHEET

■ Features

- Easy Implementation
- Sharp Graphics
- High Contrast
- Low Profile
- Single 3.3V DC Power Supply
- High Density

■ Physical Dimensions

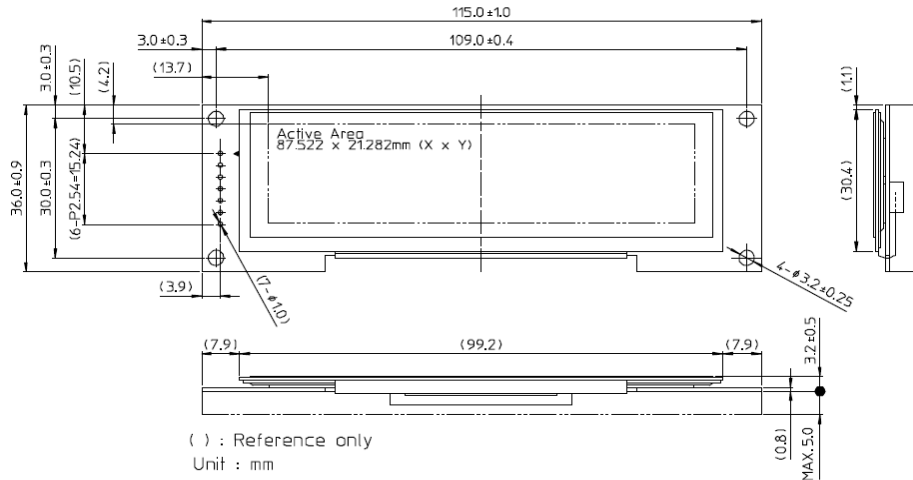

Specifications

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power Supply Voltage	VCC	3.14	3.30	3.47	VDC	

■ Electrical Characteristics Ambient temp. = 25°C, VCC = 3.3V

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Async, Sync, SPI						
High Input Voltage	VIH	0.8VCC	-	VCC	V	
Low Input Voltage	VIL	0	-	0.2VCC	V	
High Input Current	I _{IH}	-	-	3.0	uA	VIN = 3.3V
Low Input Current	I _{IL}	-	-	-0.6	mA	VIN = 0V
High Output Voltage	VsOH	2.4	-	VCC	V	IOH = -1.5mA
Low Output Voltage	VsOL	0	-	0.6	V	IOL = 1.6mA

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power Supply Current 1	ICC1	-	270	350	mADC	All dots on
Power Supply Current 2	ICC2	-	155	200	mADC	50% of dots on
Power Supply Current 3	ICC3	-	35	50	mADC	All dots off
Power Supply Current 4	ICC4	-	20	-	mADC	Power save mode
Power Consumption	Pwr	-	891	1155	mWatt	All dots on

■ Optical Specifications

Luminance	100 cd/m ² (Typical)	Condition : +25 °C
Lifetime *1	70,000 Hours *2	Condition : +25 °C

*1 The time for Luminance to decrease in half

*1 Lighting Ratio 30%

■ Environmental Specifications

Operating Temperature	-20 to +70 °C
Storage Temperature	-30 to +80 °C
Operating Humidity	20 to 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

■ Functions

- Control commands (backspace, horizontal tab, etc)
- Character display, graphic display, various display actions
- User definable fonts (16 characters)
- User windows function (screen can be divided into 4 windows and controlled independently)
- Screen rotation (180 degrees)
- Image data storage (FROM) *Can hold up to 256 screens.
- Dot unit control (image and character)

■ Physical Specifications

Number of Dots	16384 (256 x 64)
Display Area	87.522 mm x 21.282 mm (X x Y) *3.55inch
Pixel Size (X x Y)	0.312 mm x 0.303 mm (X x Y)
Pixel Pitch (X x Y)	0.342 mm x 0.333 mm (X x Y)
Weight	Approximately 25g

■ Selectable Font

ANK*	All (5x7, 8x16)
JIS Kanji	16x16 dot font
Chinese	16x16 dot font
Korean	16x16 dot font
Character Code	ASCII, one byte code page, JIS X208, Big-5, GB2312-80, KSC5601-87

*ANK (Alphabet, Numeric, Kana)

■ Interface

Asynchronous Serial, Synchronous Serial and SPI

Receive Buffer	255 bytes
Flow Control	SBUSY signal

Asynchronous Serial	Baud Rate	Selectable 9,600bps, 19,200bps, 38,400bps and 115,200bps
	Format	8-bit, No-parity, 1 Stop-bit
Synchronous Serial	Clock Speed	2MHz maximum
SPI	Clock Speed	2MHz maximum

■ Connectors

CN1: Serial interface and power through-holes
*Please refer to product specification for details.



Leaflet contents, specifications and external appearance of products may change without notice.

Please confirm product details in the specification.

Copyright (C) 2017 NORITAKE ITRON CORP.