
# 1775469-8 - ACTIVE

## HPI

TE Internal #: 1775469-8 PCB Mount Header, Right Angle, Wire-to-Board, 8 Position, 2 mm [. 079 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Natural, HPI

### View on TE.com >



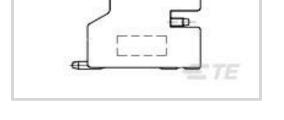

### Connector System: Wire-to-Board

Number of Positions: 8

Number of Rows: 1

Centerline (Pitch): 2 mm [.079 in ]

PCB Mount Orientation: Right Angle

All AMP HPI 2.0 mm Headers (206)

# Features

## Product Type Features

Connector System

Header Type

Wire-to-Board

Fully Shrouded



Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Number of Positions	8			
Number of Rows	1			
PCB Mount Orientation	Right Angle			
Electrical Characteristics				
Operating Voltage	250 VAC			
Body Features				
Primary Product Color	Natural			
Contact Features				
Contact Mating Area Length	3.53 mm[.139 in]			
Mating Square Post Dimension	.5 mm[.02 in]			

PCB Mount Header, Right Angle, Wire-to-Board, 8 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Natural, HPI



PCB Contact Termination Area Plating Material Thickness	2 µm[80 µin]	
Contact Layout	Inline	
PCB Contact Termination Area Plating Material Finish	Matte	
Contact Shape & Form	Square	
Contact Mating Area Plating Material Finish	Matte	
Contact Underplating Material	Nickel	
PCB Contact Termination Area Plating Material	Nickel	
Contact Base Material	Brass	
Contact Mating Area Plating Material	Tin	
Contact Type	Pin	
Contact Current Rating (Max)	3 A	
Termination Features		
Square Termination Post & Tail Dimension	.5 mm[.02 in]	
Termination Post & Tail Length	1 mm[.039 in]	
Termination Method to Printed Circuit Board	Surface Mount	
Mechanical Attachment		
Mating Alignment Type	Polarization	
Mating Retention	Without	
PCB Mount Retention Type	Solder Peg	
Connector Mounting Type	Board Mount	
Mating Alignment	With	
PCB Mount Alignment	Without	
PCB Mount Retention	With	
Housing Features		
Housing Material	PA 9T GF	
Centerline (Pitch)	2 mm[.079 in]	
Dimensions		
Connector Length	19.4 mm[.764 in]	
Connector Height	5.5 mm[.217 in]	
Connector Width	7.6 mm[.299 in]	
Usage Conditions		
Operating Temperature Range	-25 – 85 °C[-13 – 185 °F]	

PCB Mount Header, Right Angle, Wire-to-Board, 8 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Natural, HPI



Operation/Application						
Circuit Application	Signal					
Industry Standards						
UL Flammability Rating	UL 94V-0					
Packaging Features						
Packaging Quantity	600					
Packaging Type	Reel					
Product Compliance						
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>						
-	Compliant					
For compliance documentation, visit the product page on TE.com>	Compliant Compliant					
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU						
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant					

homogenous material. Also BFR/CFR/PVC Free

### Solder Process Capability

Reflow solder capable to 260°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

PCB Mount Header, Right Angle, Wire-to-Board, 8 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Natural, HPI






# Also in the Series | HPI

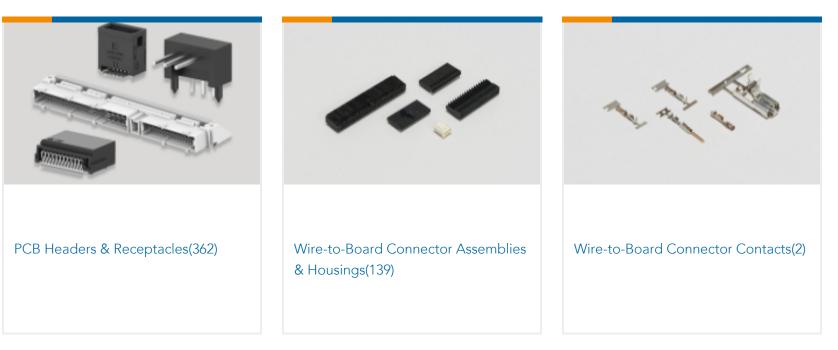

# Customers Also Bought

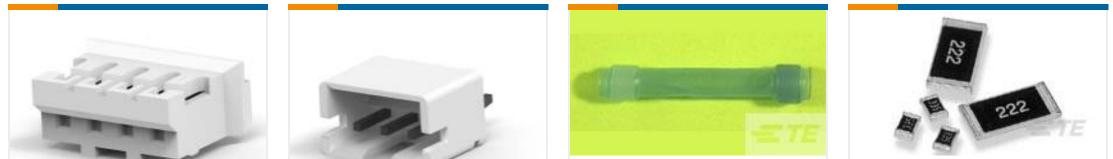

= TE	= TE			
TE Part #440129-6 AMP HPI 2.0 mm Receptacle Housings	TE Part #440054-6 AMP HPI 2.0 mm Headers	TE Part #650137-000 D-436-0097	TE Part #1623181-1 CRG0805 1% 2K7	



# Documents

### CAD Files

Customer View Model

ENG\_CVM\_CVM\_1775469-8\_A.2d\_dxf.zip

English

3D PDF

3D

PCB Mount Header, Right Angle, Wire-to-Board, 8 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Natural, HPI



**Customer View Model** 

ENG\_CVM\_CVM\_1775469-8\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1775469-8\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

HPI Connectors QRG

English

Product Specifications

Application Specification

English

Agency Approvals UL Report

English