


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| BANDING PART NUMBER | COIL BAND WIDTH<br>±.010" [ 0.25 ] | MAT'L TYPE | MAT'L COATING | REQ'D.MLT HEAD PART NUMBER | MAT'L LENGTH     | MAT'L THICKNESS<br>±.001" [ 0.03 ] | MAT'L EDGES |
|---------------------|------------------------------------|------------|---------------|----------------------------|------------------|------------------------------------|-------------|
| MBEH-TLR            | .500" [ 12.70 ]                    | 304        | -----         | MTEH-C                     | 250.0' [ 76.2m ] | .010" [ .25 ]                      | NOTE 5      |
| MBEH-TLR316         | .500" [ 12.70 ]                    | 316        | -----         | MTEH-C316                  | 250.0' [ 76.2m ] | .010" [ .25 ]                      | NOTE 5      |
| MBSH-TR             | .625" [ 15.88 ]                    | 304        | -----         | MTHSH-C                    | 200.0' [ 61.0m ] | .015" [ .38 ]                      | NOTE 6      |
| MBSH-TR316          | .625" [ 15.88 ]                    | 316        | -----         | MTHSH-C316                 | 200.0' [ 61.0m ] | .015" [ .38 ]                      | NOTE 6      |
| MBCEH-QR316         | .500" [ 12.70 ]                    | 316        | POLYESTER     | MTHCEH-C316                | 82.5' [ 25.0m ]  | .010" [ .25 ]                      | NOTE 7      |
| MBCSH-QR316         | .625" [ 15.88 ]                    | 316        | POLYESTER     | MTHCSH-C316                | 82.5' [ 25.0m ]  | .015" [ .38 ]                      | NOTE 7      |

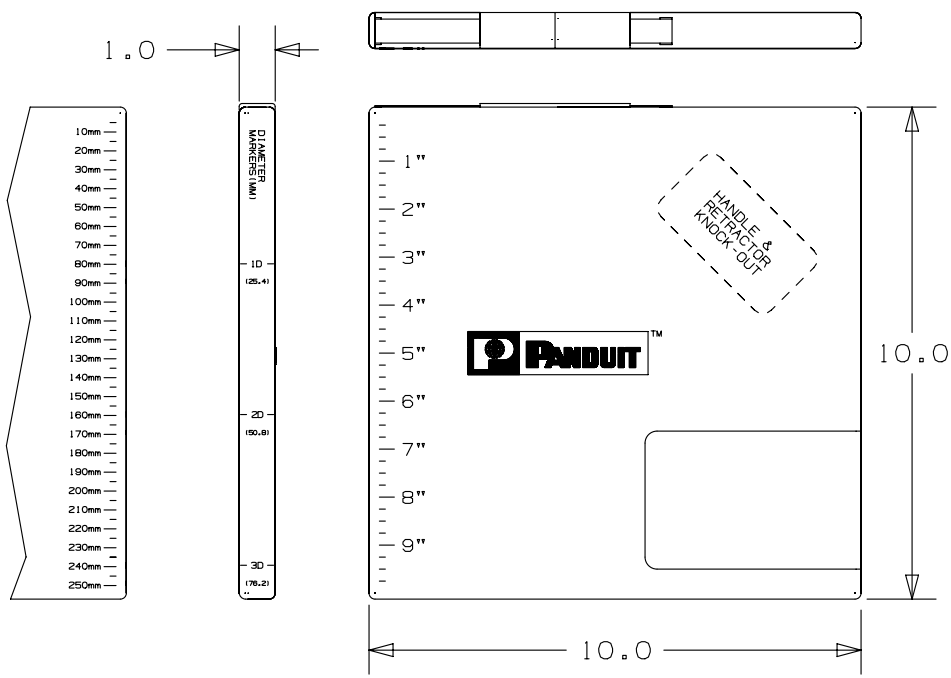

NOTES:

1. INSTALLATION TOOLS:  
RT2HT, ST2MT (MBEH, MBCEH ONLY), PBTMT, RT2HTN
2. BRACKETS [ ] DENOTES DIMENSIONS IN MILLIMETERS
3. SEE TABLE FOR COMPATIBLE BANDING HEAD PART NUMBERS
4. TOLERANCES UNLESS OTHERWISE SPECIFIED:  
.X ± .13 [ 3.30 ]
5. FULLY ROUNDED EDGES
6. BROKEN EDGES TO ELIMINATE SHARP EDGES
7. FULLY COATED MATERIAL:  
COATING THICKNESS: .003"/.007" [ .08/.18 ] PER SIDE

| REV | DATE  | BY   | CHK | APR  | DESCRIPTION  | ECN        |
|-----|-------|------|-----|------|--|------------|
| 05A | 4/13  | JAMB | MIM | RGRO | UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO   | SSECN01049 |
| 04A | 7/11  | JAMB | MIM | ---  | NOTE #1 REMOVED INSTALLATION TOOL ST3MT. ADDED INSTALLATION TOOL ST2MT (MBEH, MBCEH ONLY) PBTMT, RT2HTN                    | -----      |
| 03A | 10/08 | JAMB | SKB | ---  | NOTE #1: INSTALLATION TOOL RT1HT REPLACED BY RT2HT   | -----      |
| 02A | 11/07 | JAMB | EJD | ---  | ⓈPART NO.MBSH-TR & MBSH-TR316 MAT'L LENGTH CHANGED FROM 200.0' [70.0m] TO 200.0' [61.0m]. ORIG CAD FILE SPEC WAS S41199_02 | -----      |
| 02  | 9/05  | JAMB | EJD | ---  | REMOVED PPTMT, GS4MT, ST2MT & HTMT APPLICATION TOOLS   | SSECN00049 |
| 01  | 5/05  | JAMB | EJD | JJB  | ⒶREQ'D BANDING HEAD PART NO.MTHCSH-C316 WAS PART NO. MTHCSDH-C316  | 12678      |

|   |                      |  |           |
|---|----------------------|--|-----------|
| TITLE   |                      | STAINLESS STEEL METAL BANDING CONTINUOUS |           |
| CUSTOMER DRAWING  |                      |  |           |
| ITEM REVISION NAME  | N41199BS/05          | <b>PANDUIT</b>                           |           |
| DATASET FILE NAME   | N41199BS_DC/05A      |  |           |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ] |                      | MATERIAL:<br>SEE NOTES                   |           |
| .x ± .1 [ 2.54 ]  | .xxx ± .005 [ .127 ] | DRAWING NUMBER:<br>N41199BS_DC           |           |
| .xx ± .01 [ .25 ]   | ANGLES ± 5 °         |  |           |
| THIRD ANGLE PROJECTION  |                      |  |           |
| DRAWN BY  | DATE                 | CHK                                      | SCALE     |
| JAMB  | 5/05                 | EJD                                      | NONE      |
| SHT 1 OF 1  |                      |  | SIZE<br>A |