


PANDUIT PART NUMBER	WIRE RANGE	COLOR CODE	DIMENSIONS in.		CRIMP TOOL	STRIP LENGTH +1/32 +0.8 -0 -0
			A ±.030	B		
DV18-250MB-3K	22-18	RED	.90 (22,9)	.155 (3,94)	CD-800-1, CD9-1A	9/32 (7,1)
DV14-250MB-3K	16-14	BLUE	.90 (22,9)	.175 (4,45)	CD-800-2, CD9-2A	9/32 (7,1)
DV10-250M-2K	12-10	YELLOW	.96 (24,4)	.225 (5,71)	CD-800-3, CD9-3B	11/32 (8,7)

NOTES:

- CSA CERTIFIED FOR:
  - 600 V MAX. VOLTAGE RATING
  - 300 V MAX. VOLTAGE RATING (DV10-250M-2K)
  - 221°F (105°C) MAX. TEMP. RATING
  - STRANDED COPPER WIRE ONLY
- MATERIAL:
  - STAMPING - .03" THK COPPER, NICKEL PLATED
  - HOUSING - VINYL
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- PACKAGE QUANTITY: 3K = 3000 PCS. 2K = 2000 PCS.  
CONTINUOUS MOLDED CARRIER STRIP

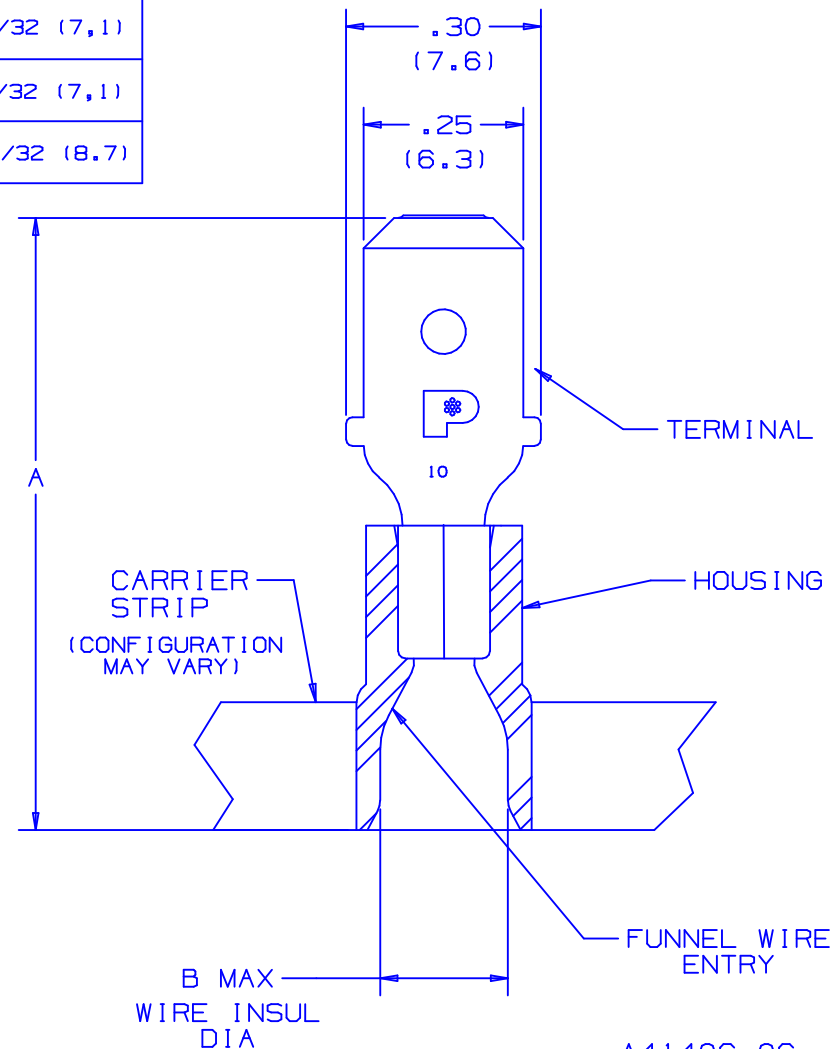

CERTIFIED  
LR31212

A41406\_06

06	11/04	KLFU		ADDED LOGO AND MARKING 10				PANDUIT CORP. TINLEY PARK, ILLINOIS			
05	1/01	RM	SKB	FILESPEC WAS N41406AA_PCD-04	08933	JAC	CCH				
04		ES		MATERIAL WAS TIN PLATED, ADDED CD9 TO CRIMP TOOL COLUMN. NOTE-1C WAS 194°F (90°C)	07695			DISCO 2 PC. VINYL INSULATED, .250 MALE TAB			
03	10/96	TSM	RLS	ADDED DV10-250M-2K	05167	LCA	DBH				
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	DRAWN BY JP	CHK'D	SCALE NONE	DRAWING NO. A41406