

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator box, application: Standard, connection method: M8 socket Metal, number of slots: 8, number of positions: 4, coding: A, slot assignment: Double, status display: Yes, pnp; master cable connection: Pluggable screw connection 180°, PUR/PVC, cable length: 10 m, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics
- Flexible: distributor box with connector hood for on-site assembly
- Save space: distributor box with double occupancy for two sensors in one slot

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1197618 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product key | BF3BCD |
| GTIN | 4063151257842 |
| Weight per piece (including packing) | 1,741.8 g |
| Weight per piece (excluding packing) | 22.22 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Technical data

Notes

| | |
|---------|--|
| General | NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties. |
| General | Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories". |

Product properties

| | |
|---------------------|--|
| Product type | Distributor boxes with M8 to M12 slots |
| Number of positions | 4 |
| Application | Standard |
| Number of slots | 8 |
| Coding | A |
| LED | yes |

Material specifications

| | |
|--|------------|
| Material | Cu alloy |
| | PBT |
| | PUR |
| Seal material O-ring | FKM |
| Seal material | FKM |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PBT |
| Material of contact, master cable side | CU alloy |
| Material of the contact carrier on the master cable side | PA |
| Material of contact surface, master cable side | tin-plated |

Dimensions

| | |
|---------------------|----------|
| Dimensional drawing | |
| Width | 30 mm |
| Height | 49 mm |
| Length | 180.9 mm |

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Connection data

Conductor connection

| | |
|--|----------------------------|
| Connection method | Pluggable screw connection |
| Tightening torque, cover screw | 1 Nm |
| Tightening torque of mounting screw for fixing the housing | 0.8 Nm |

Pin assignment

| | |
|--|--------------------------|
| Slot/position = Wire color or connection | 1 / 4 (A) = 1 / 4 = WH |
| | 1 / 2 (B) = 1 / 2 = GYPK |
| | 2 / 4 (A) = 2 / 4 = GN |
| | 2 / 2 (B) = 2 / 2 = RDBU |
| | 3 / 4 (A) = 3 / 4 = YE |
| | 3 / 2 (B) = 3 / 2 = WHGN |
| | 4 / 4 (A) = 4 / 4 = GY |
| | 4 / 2 (B) = 4 / 2 = BNGN |
| | 5 / 4 (A) = 5 / 4 = PK |
| | 5 / 2 (B) = 5 / 2 = WHYE |
| | 6 / 4 (A) = 6 / 4 = RD |
| | 6 / 2 (B) = 6 / 2 = YEBN |
| | 7 / 4 (A) = 7 / 4 = BK |
| | 7 / 2 (B) = 7 / 2 = WHGY |
| | 8 / 4 (A) = 8 / 4 = VT |
| | 8 / 2 (B) = 8 / 2 = GYBN |
| 1-8 / 1 (+ 24 V) = U _N = BN | |
| 1-8 / 3 (0 V) = 0 V = BU | |

Signaling

| | |
|------------------------|-----|
| Status display present | Yes |
|------------------------|-----|

Electrical properties

| | |
|---|-------------------------------|
| Max. operating voltage U _{max} | 30 V DC |
| Local diagnostics | Supply voltage Green LED |
| | Status display I/O Yellow LED |
| Nominal voltage U _N | 24 V DC |
| Rated current, total | 6 A |
| Max. current carrying capacity per path | 2 A |
| Current carrying capacity per slot | 2 A |

Cable/line


| | |
|--------------|------|
| Cable length | 10 m |
|--------------|------|

PUR/PVC black [PUR]

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box

1197618

<https://www.phoenixcontact.com/pc/products/1197618>

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 92 kg/km |
| UL AWM Style | 20549 |
| Number of positions | 10 |
| Shielded | no |
| Cable type | PUR/PVC black [PUR] |
| Conductor structure signal line | 19x 0.15 mm |
| AWG signal line | 22 |
| Conductor cross section | 8x 0.34 mm ² (Signal line) 2x 0.75 mm ² (power line) |
| Wire diameter incl. insulation | 1.3 mm ±0.1 mm (Signal line) 1.8 mm ±0.1 mm (power line) |
| External cable diameter | 7.9 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | black RAL 9005 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | PVC |
| Single wire, color | brown, blue, white, green, yellow, gray, pink, red, black, violet |
| Inner sheath thickness | ≥ 0.15 mm |
| Thickness, outer sheath | ≥ 0.38 mm |
| Overall twist | Wires twisted in layers |
| Nominal voltage, cable | 300 V |
| Test voltage | 2000 V |
| Minimum bending radius, fixed installation | 7.5 x D |
| Minimum bending radius, flexible installation | 10 x D |
| Max. bending cycles | 1500000 |
| Flame resistance | DIN EN 50265 |
| Resistance to oil | according to VDE 0472 Part 803 |
| Other resistance | Highly resistant to acids, alkaline solutions and solvents |
| Special properties | Silicone-free |
| Ambient temperature (operation) | -40 °C ... 90 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation) 80 °C (in acc. with UL) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M8 connector |
| Standards/specifications | IEC 61076-2-104 |

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|------------------|
| Degree of protection | IP67 |
| Ambient temperature (operation) | -25 °C ... 80 °C |

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box




1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Drawings

Schematic diagram

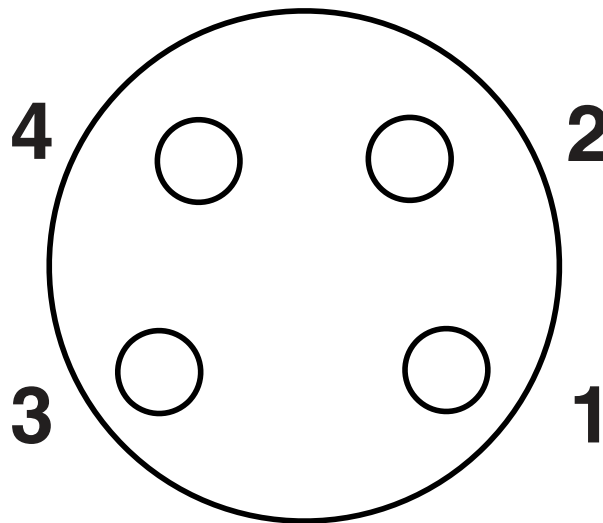

M8 slot, socket, 4-pos.


SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Dimensional drawing

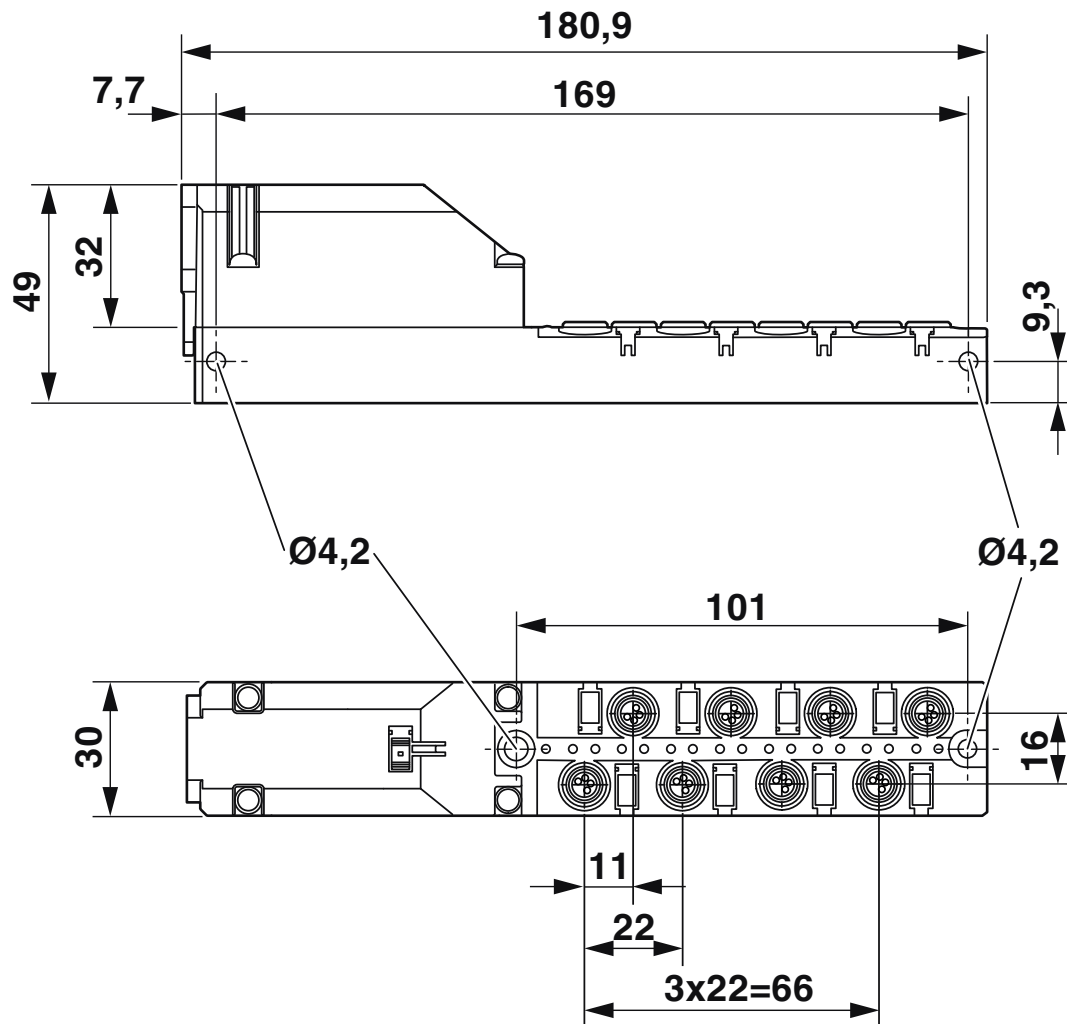


SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Circuit diagram

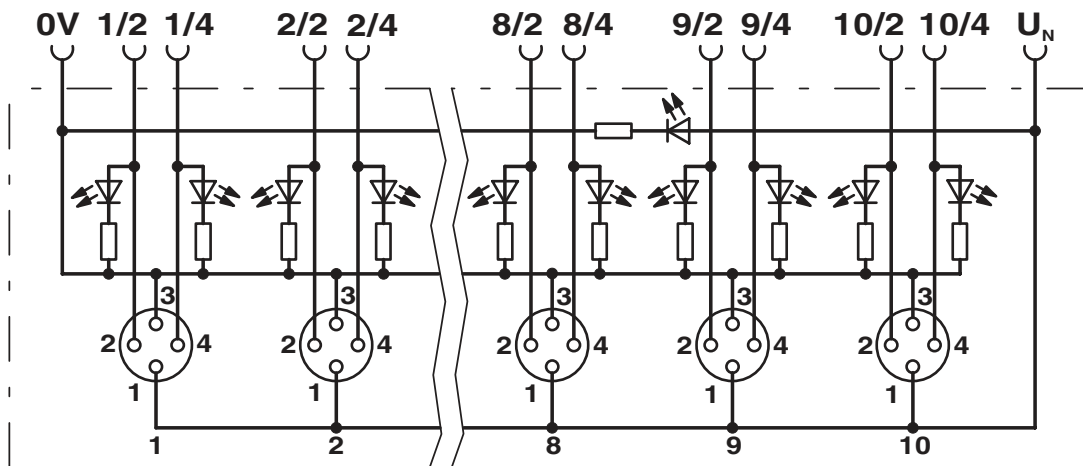

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440108 |
| ECLASS-12.0 | 27440108 |
| ECLASS-13.0 | 27440108 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002585 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31251500 |
|-------------|----------|

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Environmental product compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

Accessories

UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/pc/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

PROT-M8 - Screw plug

1682540

<https://www.phoenixcontact.com/pc/products/1682540>



An M8 screw plug for the unoccupied M8 sockets of the sensor/actuator cable, boxes and flush-type connectors

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/pc/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/pc/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

SACC BIT M8-D12 - Tool

1208474

<https://www.phoenixcontact.com/pc/products/1208474>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 12 mm, for 4 mm hexagonal drive

SZS 0,4X2,5 VDE - Screwdriver

1205037

<https://www.phoenixcontact.com/pc/products/1205037>



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

SF-BIT-SL 0,45X2,4-70 - Screw insert

1212607

<https://www.phoenixcontact.com/pc/products/1212607>



Screw bit, slotted, E6.3-1/4" drive, size: 0.45 x 2.4 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/pc/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

SACB- 8/4-L-C-M8 HD/10,0 PUR - Sensor/actuator box



1197618

<https://www.phoenixcontact.com/pc/products/1197618>

SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/pc/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com