

REV. 0


DCO 142515

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	1350 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE 4 MS MAX.
	RELEASE 6 MS MAX.
	CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET

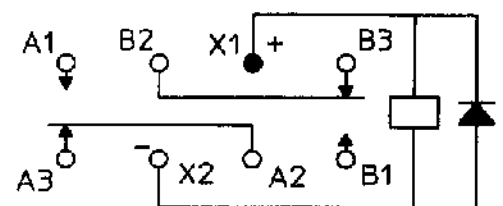

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. PBB 11/27/00 CK.TLG 11-27-00

**CI Technologies**  
advanced control electronic solutions

CUST. OPL  
CUST. NO. M39016/37-022P REV.

'3SBC' RELAY

3SBC2092A2