


MODEL NUMBER  
TRM-2001-MO-NNN-02

NOTES:

1. MATERIAL & FINISH:
  - 1.1. BODY, COUPLING NUT & END PLUG: PASSIVATED STAINLESS STEEL
  - 1.2. DIELECTRIC: PTFE (TEFLON)
  - 1.3. CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
  - 1.4. GASKET: SILICONE RUBBER
2. SPECIFICATIONS:
  - 2.1. FREQUENCY RANGE: DC TO 18 GHz
  - 2.2. INPUT POWER (MAX): 2 WATTS AVERAGE AT +25°C, DERATED LINEARLY TO 0.5 WATTS AT +125°C
  - 2.3. VSWR (MAX): 1.05+0.01f (GHz)
  - 2.4. IMPEDANCE: 50 OHMS NOMINAL
  - 2.5. OPERATING TEMPERATURE RANGE: -55°C TO +125°C

TYPE N MALE  
PER MIL-STD-348  
FIGURE 304-1

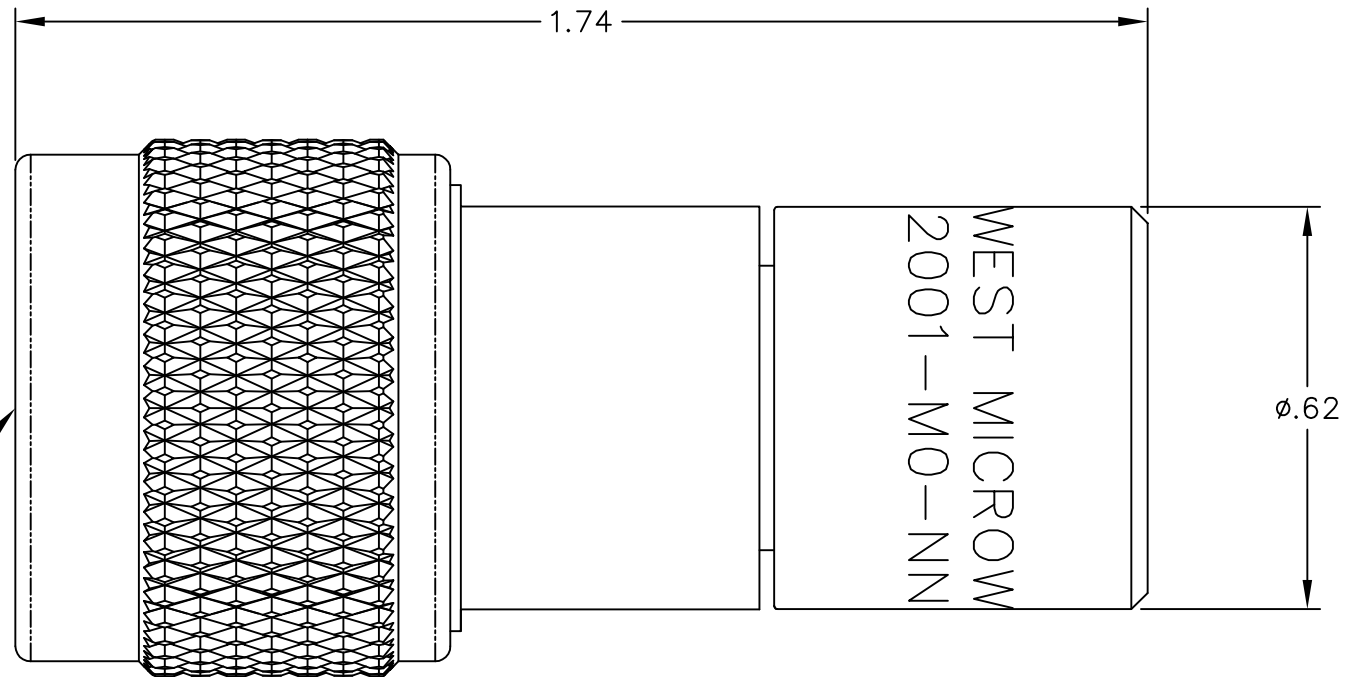


REV.	DESCRIPTION	DATE
-	RELEASED	3/21/79
A	ECR 6545	6/27/89
B	ECN 12868	8/23/93
C	ECN 13621	5/19/94
H	ECO 58152	3/9/22



NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005  
 2 PLACE DECIMALS ±.02  
 FRACTIONS ±1/64  
 PARALLELITY: T.I.R. \_\_\_\_\_  
 FLATNESS: T.I.R. \_\_\_\_\_  
 CONCENTRICITY: T.I.R. \_\_\_\_\_  
 ANGLES AND PERPENDICULARITY: ±1'

CAGE CODE <b>34078</b>		<b>MIDWEST MICROWAVE</b>	
		TITLE TERMINATION TYPE N MALE	
		DRAWING NUMBER TRM-2001-MO-NNN-02-01	REV. H
DRAWN/DATE A.BEATTY 7/31/91	ENG./DATE G.KOZAK 7/31/91	SCALE: 2:1	SHEET 1 of 1
CHECKED/DATE	APPROVED/DATE		