

# Surface Mount Directional Coupler

## ADC-20-132+

50Ω 100 to 1300 MHz

### The Big Deal

- Useable to 1500 MHz
- Low mainline loss, 0.4 dB
- High directivity, 22 dB
- High-Power, 4W



CASE STYLE: CD542

### Product Overview

Mini-Circuits' ADC-20-132+ is a surface-mount directional coupler providing 20 dB coupling from 100 to 1300 MHz. This model, provides good coupling flatness, low mainline loss, high directivity and RF input power handling up to 4W. The unit comes housed in a miniature 6-lead plastic package (0.27 x 0.31 x 0.11"), saving space in dense PCB layouts.

### Key Features

Feature	Advantages
Usable to 1500 MHz	The ADC-20-132+ supports a variety of applications.
Good coupling flatness, $\pm 1.5$ dB	Provides consistent coupling performance across frequency.
High power handling: <ul style="list-style-type: none"><li>• 4W to 700 MHz</li><li>• 2W to 1300 Mhz</li></ul>	Usable in systems with a wide range of high-power requirements.
Low mainline loss, 0.4 dB	Provides excellent through-path signal power transmission.
High directivity, 22 dB	High directivity allows accurate signal sampling through the coupled port with minimal measurement error.
Small size, 0.27 x 0.31 x 0.11"	Provides high power capability while saving space in systems with tight layouts.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Directional Coupler

## ADC-20-132+

50Ω 100 to 1300 MHz

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
50Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

### Outline Drawing

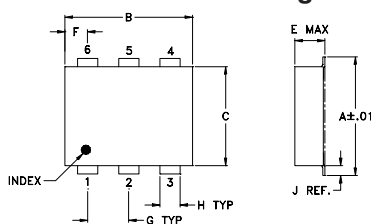

### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.20

### Demo Board MCL P/N: TB-05 Suggested PCB Layout (PL-095)

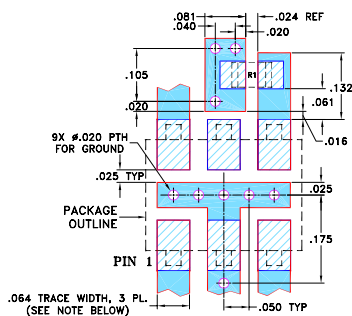

RESISTOR R1: 49.9 Ohm, 0805 SIZE.  
 NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- useable to 1500 MHz
- low mainline loss, 0.4 dB typ.
- high directivity, 22 dB typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

### Applications

- cable tv



Generic photo used for illustration purposes only  
CASE STYLE: CD542

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel  
at no extra cost


Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

### Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		100	—	1300	MHz
Mainline Loss <sup>1</sup>	100	—	0.3	0.6	dB
	500	—	0.2	0.4	
	1000	—	0.3	0.5	
	1300	—	0.4	0.7	
Coupling	100-1300	—	20	—	dB
Coupling Flatness(±)	100-1000	—	1.0	1.6	dB
	100-1300	—	1.5	2.5	
Directivity	100	20	25	—	dB
	500	18	23	—	
	1000	14	18	—	
	1300	10	15	—	
Return Loss (Input)	200-1000	—	19	—	dB
	100-1300	—	15	—	
Return Loss (Output)	200-1000	—	20	—	dB
	100-1300	—	15	—	
Return Loss (Coupling)	200-1000	—	17	—	dB
	100-1300	—	15	—	
Input Power	200-700	—	—	4	W
	100-1300	—	—	2	

1. Mainline loss includes theoretical power loss at coupled port.

### Electrical Schematic

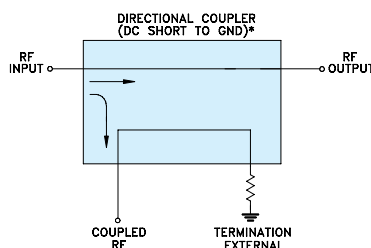

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.






[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR  
M155179  
ED-13396/2  
ADC-20-132+  
CH/CP/AM  
200414  
Page 2 of 3

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
	In-Out				In	Out	Cpl
100	0.29		21.48	27.34	14.11	14.11	14.04
150	0.21		21.34	27.88	17.26	17.36	17.00
200	0.19		21.28	27.08	19.43	19.37	18.90
300	0.18		21.15	26.79	22.08	22.17	21.00
400	0.19		20.99	26.11	23.48	23.63	21.92
500	0.20		20.80	25.38	24.27	24.54	22.15
700	0.23		20.34	24.25	24.36	24.59	21.50
900	0.27		19.81	22.20	22.97	23.33	20.31
1100	0.33		19.25	19.78	20.86	21.14	18.82
1300	0.41		18.66	17.52	18.61	18.81	17.21

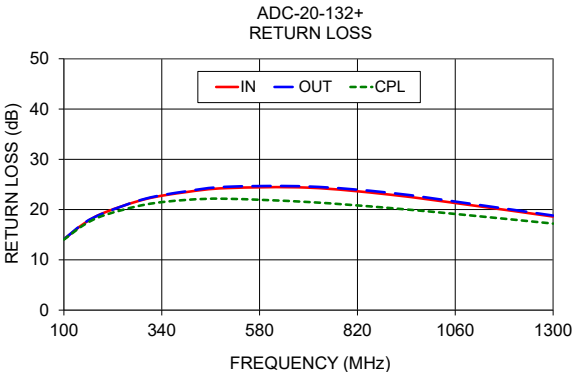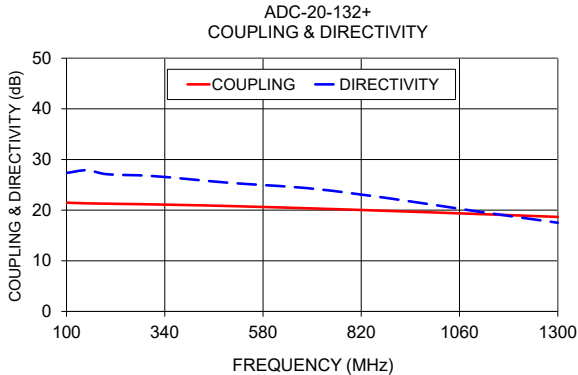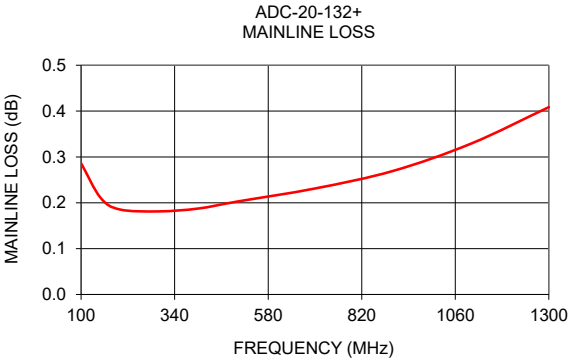

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

