


RAST

TE Internal #: 1-1971817-8 PCB Mount Header, Vertical, Wire-to-Board, 8 Position, 2.5 mm [. 098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Natural

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

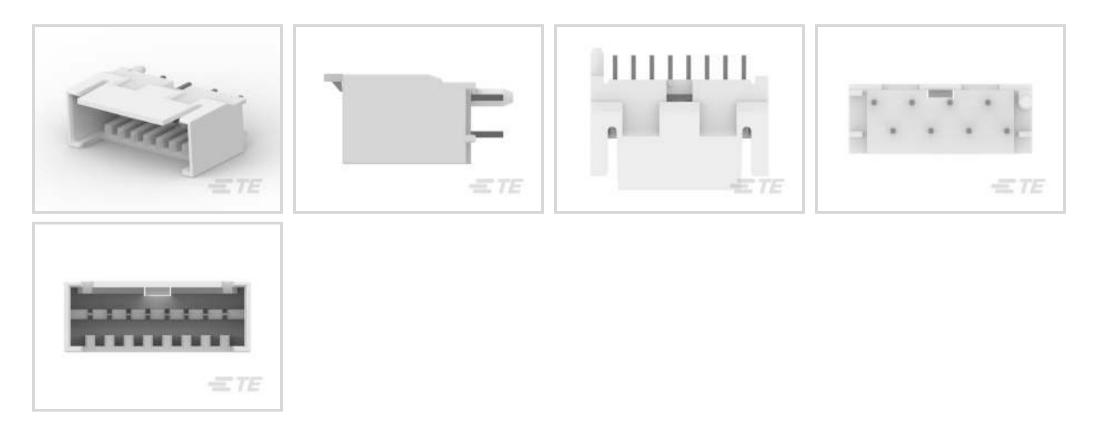

Connector System: Wire-to-Board

Number of Positions: 8

Number of Rows: 1

Centerline (Pitch): 2.5 mm [.098 in]

PCB Mount Orientation: Vertical

Features

E T E connectivity

Product Type Features

Connector System	Wire-to-Board			
Header Type	Fully Shrouded			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Number of Positions	8			
Number of Rows	1			
PCB Mount Orientation	Vertical			
Electrical Characteristics				
Operating Voltage	50 VAC			
Body Features				
Primary Product Color	Natural			

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Natural



Contact Features

PCB Contact Termination Area Plating Material Thickness	3.8 μm[149.6 μin]			
Mating Tab Width	1.5 mm[.059 in]			
Mating Tab Thickness	.6 mm[.024 in]			
Contact Mating Area Plating Material Thickness	1.27 μm[50.8 μin]			
PCB Contact Termination Area Plating Material Finish	Matte			
Contact Shape & Form	Square			
Contact Mating Area Plating Material Finish	Matte			
PCB Contact Termination Area Plating Material	Tin			
Contact Base Material	Copper Alloy			
Contact Mating Area Plating Material	Tin			
Contact Type	Tab			
Contact Current Rating (Max)	2 A			
Termination Features				
Rectangular Termination Post & Tail Thickness	.6 mm[.024 in]			
Rectangular Termination Post & Tail Width	.65 mm[.026 in]			

Termination Post & Tail Length

Termination Method to Printed Circuit Board

2.9 mm[.11 in]

Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Keyed, Polarization			
Mating Retention	With			
Mating Retention Type	Latch			
Connector Mounting Type	Board Mount			
Mating Alignment	With			
PCB Mount Alignment	With			
PCB Mount Retention	Without			
Housing Features				
Housing Material	6/6 Nylon GF, Nylon			
Centerline (Pitch)	2.5 mm[.098 in]			
Dimensions				
Connector Length	22.6 mm[.88 in]			
Connector Height	15.5 mm[.61 in]			

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Natural



Usage Conditions

Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]			
Operation/Application				
Circuit Application	Signal			
Industry Standards				
UL Flammability Rating	UL 94V-0			
Packaging Features				
Packaging Quantity	120			
Packaging Type	Box, Carton			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023			

(233)

Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Solder Process Capability

Halogen Content

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Natural





Customers Also Bought

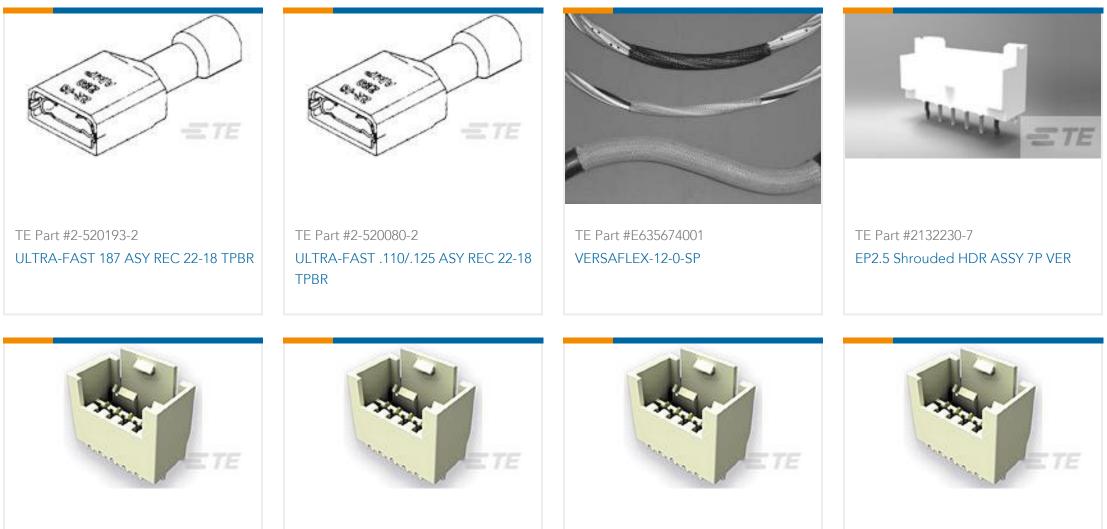

971817-7 Tab Header, Ex- Locking,

5P,RAST 2.5 Tab Header,Ex- Locking,

4P,RAST 2.5 Tab Header,Ex- Locking,

THV

TE Part #1-1971817-0 10P,RAST 2.5 Tab Header,Ex- Locking, THV	TE Part #1-1971817-3 3P,RAST 2.5 Tab Header,Ex- Locking, THV	TE Part #1-1971817-6 6P,RAST 2.5 Tab Header,Ex- Locking, THV	TE Part #1-197 7P,RAST 2.5 Ta THV
TE	TE		
TE Part #1-1971817-5	TE Part #1-1971837-4		

Documents

Product Drawings 8P,RAST 2.5 Tab Header,Ex- Locking,THV

English

THV

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1971817-8_B.2d_dxf.zip

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Natural



English

Customer View Model ENG_CVM_CVM_1-1971817-8_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1971817-8_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 7-1773465-3_RAST2.5_Flyer

English

Product Specifications

Product Specification

English

Agency Approvals UL Report

English