794616-4 • ACTIVE

MATE-N-LOK | Micro MATE-N-LOK

TE Internal #: 794616-4 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 4

Centerline (Pitch): 3 mm [.118 in]

Features

connectivity

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	4
Number of Rows	2
Electrical Characteristics	
Operating Voltage	250 VDC
Contact Features	
Contact Current Rating (Max)	5 A
Contact Retention Within Housing	Without
Contact Type	Pin

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



Termination Features Termination Method to Wire & Cable Crimp **Mechanical Attachment** Strain Relief Without Polarization Mating Alignment Type Mating Retention With With Mating Alignment Locking Tab Mating Retention Type Connector Mounting Type Cable Mount (Free-Hanging) **Housing Features** Centerline (Pitch) 3 mm[.118 in] Black Housing Color Housing Material Nylon 66/6 Dimensions Compatible Insulation Diameter (Max) 1.52 mm[.06 in] Connector Height 6.86 mm 6.85 mm Product Length

Wire Size	.051 – .517 mm ²	
Row-to-Row Spacing	3 mm[.118 in]	
Jsage Conditions		
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
ndustry Standards		
CSA Rating	Certified, LR 7189	
UL Rating	Recognized	
Agency/Standard	CNR, USR	
Approved Standards	UL E28476, VDE 40005280	
UL Flammability Rating	UL 94V-0	
	Standard Part - Not Glow Wire	

& For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



Packaging Quantity	1000
Packaging Method	Bag
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Micro MATE-N-LOK


C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



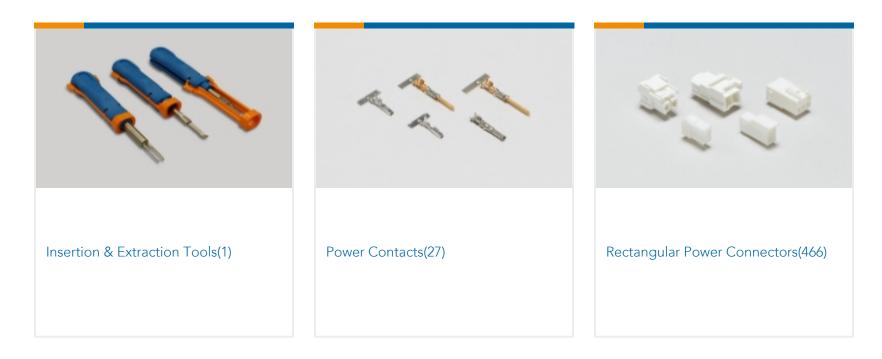

Customers Also Bought

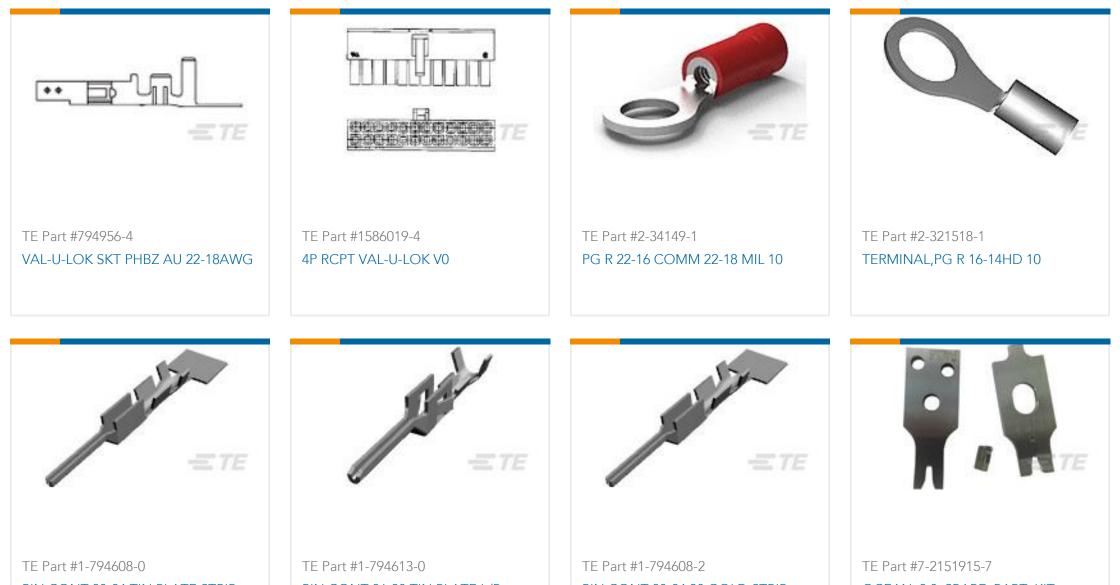

PIN CONT 20-24 TIN PLATE STRIP	PIN CONT 26-30 TIN PLATE L/P	PIN CONT 20-24 30 GOLD STRIP	OCEAN_2.0_SPARE_PART_KIT- 100F200F
TE Part #1-1969540-4 HOUSING, PLUG, 14P,DUAL ROW, EP2.5	TE Part #1320992-1 PLATE, BASE		

Documents

Product Drawings FREE HANG DBL ROW HSG 4 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_794616-4_C1.2d_dxf.zip

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



English

Customer View Model ENG_CVM_CVM_794616-4_C1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_794616-4_C1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

MICRO MATE-N-LOK CONNECTOR SYSTEM

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance Document

English

Product Compliance Document

English