


Part Number: 1903X00X

| Type | Size | Rating | Description                  |
|------|------|--------|------------------------------|
| LED  | M6   | -      | LED Recessed Panel Indicator |

Dimensions (mm)

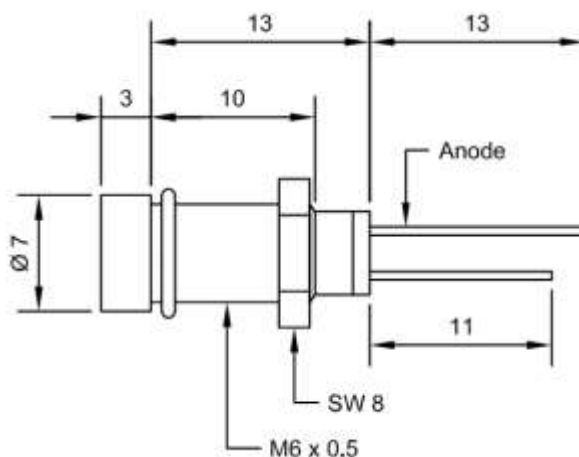

| Part #   | Colour       | Voltage V <sub>f</sub> | Intensity (mcd@10mA) |
|----------|--------------|------------------------|----------------------|
| 1903X003 | Red          | 2.0                    | 25                   |
| 1903X001 | Green        | 2.2                    | 20                   |
| 1903X002 | Yellow       | 2.1                    | 15                   |
| 1903X004 | Red/Green    | 2.0/2.2                | 25/20                |
| 1903X005 | Red/Yellow   | 2.0/2.1                | 25/15                |
| 1903X006 | Green/Yellow | 2.2/2.1                | 20/15                |
| 1903X007 | Blue         | 3.8                    | 30                   |
| 1903X008 | Orange       | 2.05                   | 30                   |
| 1903X00W | White        | 3.2                    | 3000                 |

Bezel types - X=0 satin chrome / X=1 black chrome / X=2 matt chrome

Notes:

- 1 Electrical & optical data are measured at an ambient temperature of 25°C
- 2 Luminous intensity at dc current
- 3 Storage temperature -25 °C to +80°C
- 4 Application temperature -20 °C to +60°C
- 5 Due to component tolerances, colour temperature variations may be observed
- 6 Ingress rating IP40
- 7 The plastic(polycarbonate) has limited chemical resistance
- 8 RoHS & REACH SVHC compliant