


PART NUMBER	ENGINEERING NO.	LENGTH
1300240073	DN10A-M010	3' 3" +2.19 - 0 [ 1.0M +55.6 - 0 ]
1300240078	DN10A-M030	9' 10" +3.50 - 0 [ 3.0M +88.9 - 0 ]
1300240080	DN10A-M050	16' 5" +6.50 - 0 [ 5.0M +165.1 - 0 ]

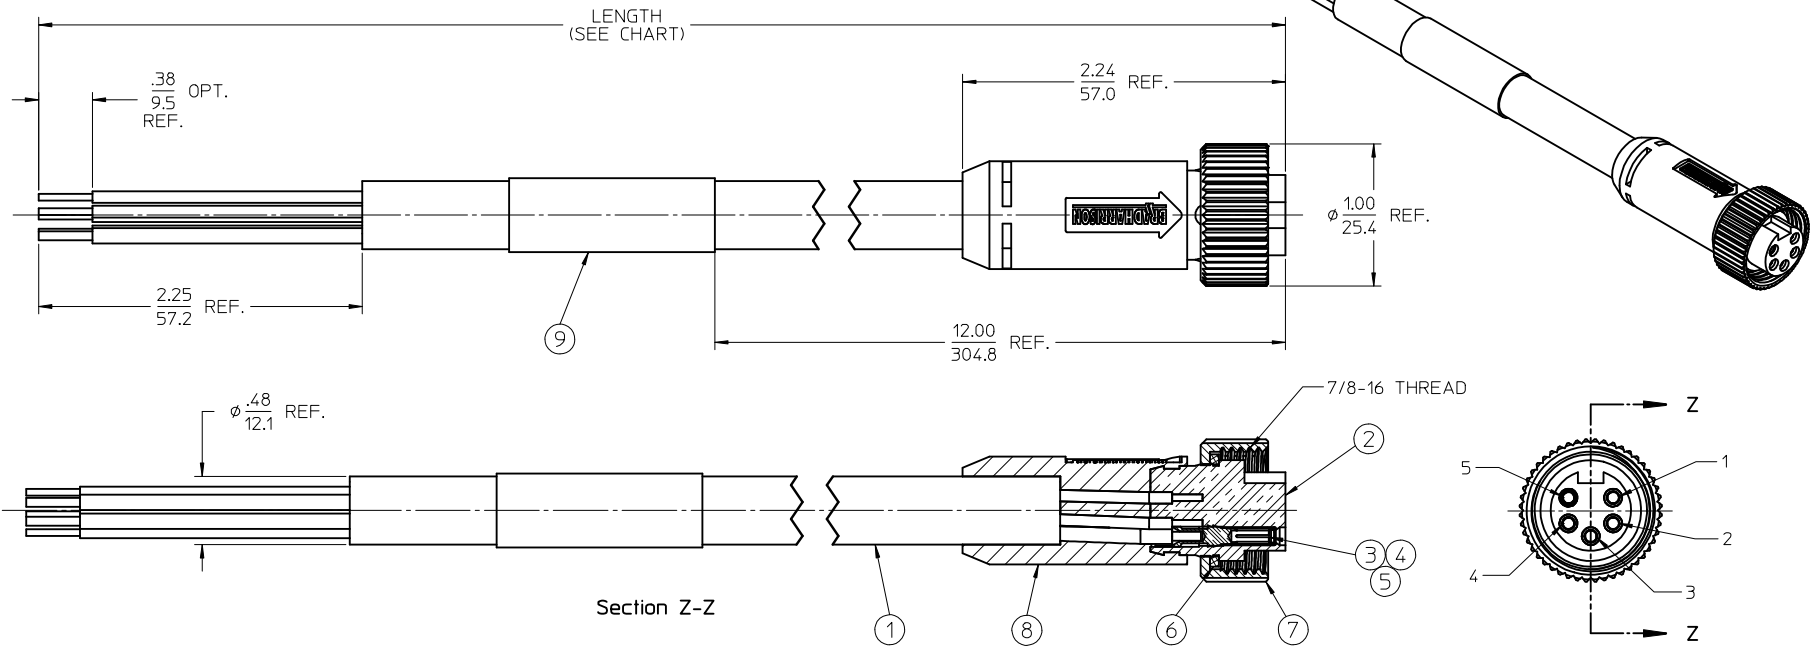


AUX. VIEW  
SCALE: 1:1

Section Z-Z

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
5. MATES WITH: MINI CHANGE, A-SIZE 5 POLE RECEPTACLE
6. ELECTRICAL SPECIFICATIONS:  
VOLTAGE RATING: 300V  
CURRENT RATING: 4 AMPS
7. ASSEMBLY IS RoHS COMPLIANT



WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
9	1	LABEL	PLASTIC FILM	BLACK/YELLOW
8	1	OVERMOLD	PVC	GRAY
7	1	COUPLING NUT	ZINC DIE CAST	BLACK
6	1	FRICTION RING	NYLON	WHITE
5	5	SOCKET SLEEVE	ST. STEEL	
4	3	CONTACT SOCKET, 18 AWG	BRASS	GOLD PLATED
3	2	CONTACT SOCKET, 16 AWG	BRASS	GOLD PLATED
2	1	INSERT, FEMALE, 5 POLE	PVC	GRAY
1	1	CABLE, DEV-NET, TRUNK, 18/2, 15/2	PVC JACKET	GRAY

<b>RELEASED</b> EC NO: MNA2009-0706 DRAWN BY: DRWINRSTONE 2009/05/07 CHKD BY: WOODMAN APPR: J.MURPHY 2009/05/15	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE <b>IN/MM</b>		SCALE <b>1.5:1</b>	DESIGN UNITS <b>INCH</b>	THIRD ANGLE PROJECTION			
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± --- ± .01	1 PLACE ± 0.3 ± ---	DRAWN BY R.STONE	DATE 2009/04/24	TITLE <b>MINI-CHANGE 5 POLE FEMALE, DEVICE NET CORD ASSEMBLY, STRAIGHT</b>			
		ANGULAR ±1/2°				CHECKED BY B.WOODMAN	DATE 2009/05/06	MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				APPROVED BY J.MURPHY	DATE 2009/05/14	MATERIAL NO. <b>SEE CHART</b>	DOCUMENT NO. <b>SD-130024-003</b>	SHEET NO. <b>1 OF 1</b>	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION