
Ŧ	D	г п	m		0
				_	





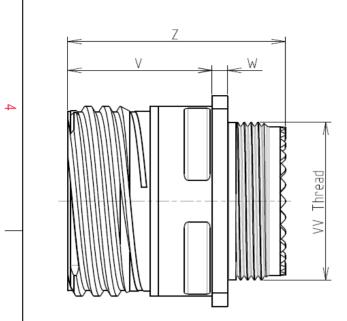

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Without Plating
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65℃ to +175℃

: 2000 hours

: 13.4 g ± 10%

8D 0

G

11

Х

05

S

F


Ν

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

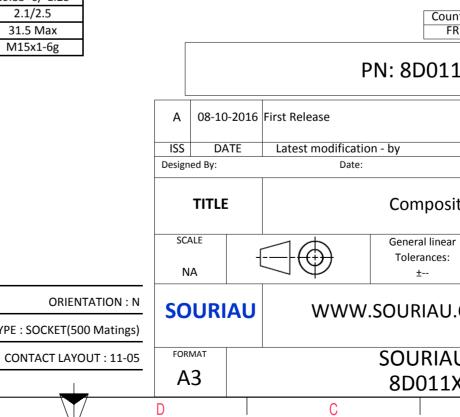

	Ξ			A			
						4	
						3	
	MPLE						
whic er of t idatio	any non-conformity or damage which does not comply with of the Parties or by a third party lation, technical notice.)						
Intry R 1X(y Jurisdiction & Control List Not Listed						
					MOD N°		
ite	Receptacl		omer drav eries	WING			
ar		NPR	DS / PROJE	CT			
		Th	859	is the prop	erty of	1	
This document is the property of SOURIAU it must not be reproduced or communicated without permission							
					SHEET		
	5SN-C B			A	1/2	J	

r	τ	۵	н П	m		0	
		Contact Layout				Ρ	anel Cutou
4	-×	$ \begin{array}{c} & & & \\ & $			ň	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positi ID A B C D E Shell Arrangement Numl size no. cont	Non X-axis (mm) Y-axis (mm) + 0.65 (1.65) +.056 (1.42) + 1.13 (2.87) 065 (1.65) + 0.00 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42) ber of Size Service Contactt Supersedes tacts contacts rating location Supersedes			2	ØA.	<u>ØT</u>
ω	11 -5 5	5 20 I All MS20050-5				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of
N						PN: 8	Country FR
					A 08-10-	2016 First Release	
					ISS DA Designed By:	TE Latest modification - by Date:	
					TITLE		mposite
_ _					SCALE NA		eral linear erances: ±
					SOURI	AU WWW.SOUF	RIAU.C
					FORMAT A3		JRIAU 011X0
L	Н	G	F	E	D	С	

