


NUMBER C-5917628

METRIC

注 3rd ANGLE PROJECTION

単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

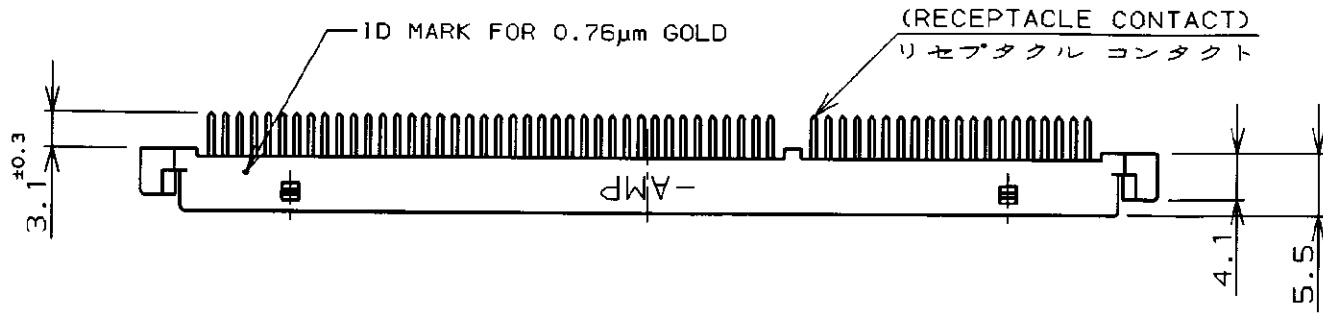

注記:

① 材料:ハウジング;熱可塑性樹脂 (UL 94V-0) 色:黒  
コンタクト:銅合金

② 表面仕上げ;  
コンタクト:全面ニッケル下地めっき  
接触部金めっき、脚部すずめっき

3. 本製品はフラックス上がり防止処理済み

NOTE:



① MATERIAL:HOUSING:THERMOPLASTICS (UL 94V-0) BLACK  
CONTACT:COPPER ALLOY

② FINISH:CONTACT:Au AT CONTACT AREA  
TIN AT TINE, OVER Ni

3. THESE PRODUCTS WERE COATED BY ANTI-FLUX MIGRATION AGENT.

④ OBSOLETE

鉛フリー  
LEAD FREE

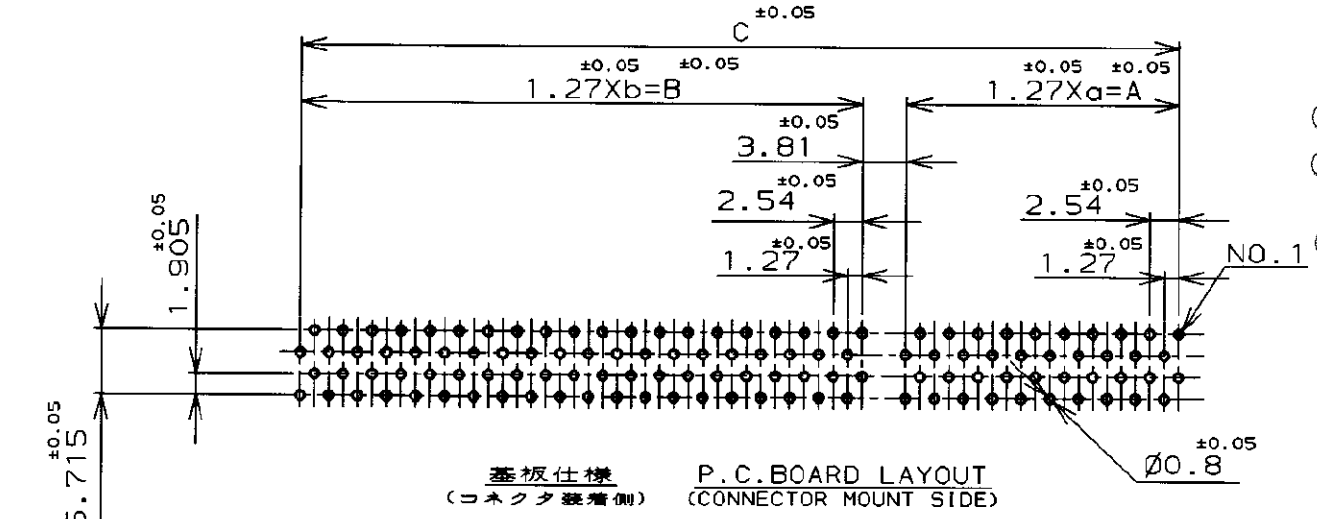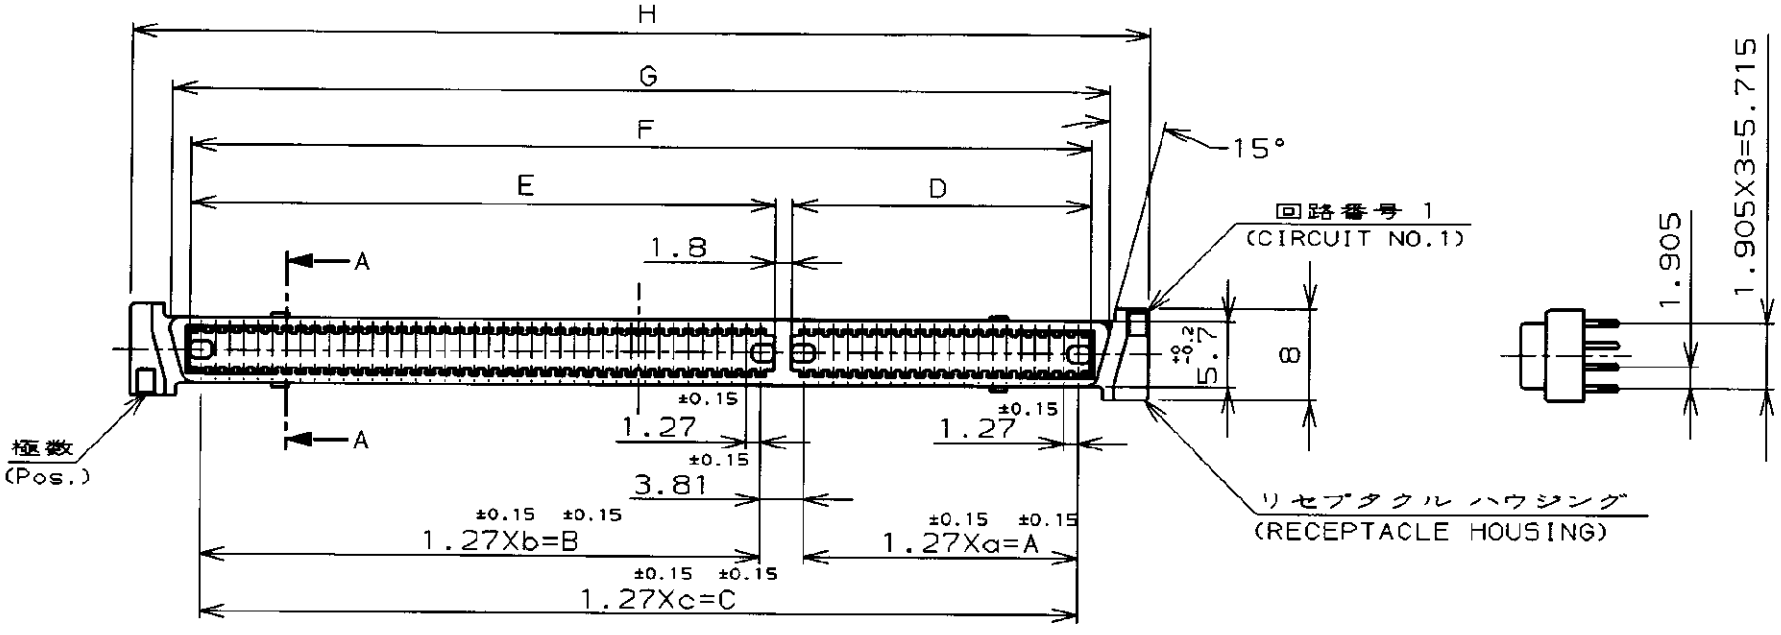

④	④	④	④	④	④	④	④	④	④	④	④	④	④	④	④	④	④	④	④	④
a	A	b	B	c	C	D	E	F	G	H	THK OF GOLD	Pos.	P/N							
29	36.83	49	62.23	—	102.87	38.83	64.23	104.87	107.96	115.40	0.76μm	160	2	—	—	—	—	—	—	—
—	—	—	—	—	39	49.53	—	—	51.53	54.62	62.15	0.76μm	80	2	—	—	—	—	—	—
39	49.53	49	62.23	—	115.57	51.53	64.23	117.57	120.66	128.19	0.3μm	180	—	—	—	—	—	—	—	—
29	36.83	49	62.23	—	102.87	38.83	64.23	104.87	107.96	115.40	0.3μm	160	—	—	—	—	—	—	—	—
29	36.83	39	49.53	—	90.17	38.83	51.53	92.17	95.26	102.79	0.3μm	140	—	—	—	—	—	—	—	—
19	24.13	39	49.53	—	77.47	26.13	51.53	79.47	82.56	90.09	0.3μm	120	—	—	—	—	—	—	—	—
—	—	—	—	—	49	62.23	—	—	64.23	67.32	74.85	0.3μm	100	—	—	—	—	—	—	—
—	—	—	—	—	39	49.53	—	—	51.53	54.62	62.15	0.3μm	80	—	—	—	—	—	—	—
—	—	—	—	—	29	36.83	—	—	38.83	41.92	49.45	0.3μm	60	—	—	—	—	—	—	—
—	—	—	—	—	19	24.13	—	—	26.13	29.22	36.75	0.3μm	40	—	—	—	—	—	—	5917628-1

**B ECO-20-000700 JUN102020**

組合電線断面積 (WIRE RANGE)	被覆外径 (INSULATION DIA.)	名称 (NAME)
mm² (AWG - )	mmφ	AMP FH CONNECTOR RECEPTACLE (VERTICAL) FOR 8mm STACKING
材料 (MATERIAL)	仕上 (FINISH)	一般公差 (GENERAL TOLERANCE)
①	②	10以下: ±0.2 10を超え30以下: ±0.25 30を超え100以下: ±0.3 角 度: ±3°
DE. T.KAWAMAE 09JUN04	CHK. I.ENOMOTO 09JUN04	尺度 (SCALE) NTS
APP. I.ENOMOTO 09JUN04	REV. B	番号 (No.) C-5917628
		SHEET 1 OF 1