

## Connection distributor - PSM PTK-4 - 2799364

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Passive RS-485 T-distributor, fitted with one 9-pin D-SUB pin strip and five 9-pin D-SUB socket strips



### Key commercial data

|                        |   |
|------------------------|---|
| Packing unit           | 1   |
| Minimum order quantity | 1   |
| Catalog page           | Page 577 (IF-2011)  |
| GTIN                   | <br>4 017918 074050 |
| Custom tariff number   | 85366990  |
| Country of origin      | GERMANY   |

### Technical data

#### General data

|   |                              |
|---|------------------------------|
| Nominal voltage $U_N$                   | 60 V AC/DC                   |
| Nominal current $I_N$                   | 1 A                          |
| Bus system                              | RS-485                       |
| Shielding                               | D-SUB frame                  |
| Test voltage                            | 500 V AC (50 Hz, 1 min, rms) |
| Ambient temperature (operation)         | -25 °C ... 70 °C             |
| Housing material                        | PVC                          |
| Inflammability class according to UL 94 | V0                           |
| Pin assignment                          | all 1:1                      |
| Width                                   | 89.8 mm                      |
| Height                                  | 89.6 mm                      |
| Length                                  | 39 mm                        |

#### Connection data

|                     |          |
|---------------------|----------|
| Connection          | Incoming |
| Number of positions | 9        |

## Connection distributor - PSM PTK-4 - 2799364

### Technical data

#### Connection data

|                     |                          |
|---------------------|--------------------------|
| Connection method   | D-SUB-9 male connector   |
| Connection          | Outgoing                 |
| Number of positions | 9                        |
| Connection method   | D-SUB-9 female connector |
| Connection          | Branching                |
| Number of positions | 9                        |
| Connection method   | 4 x D-SUB-9 socket       |

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001423 |
| ETIM 3.0 | EC001423 |
| ETIM 4.0 | EC001423 |
| ETIM 5.0 | EC001423 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 39121008 |
| UNSPSC 12.01  | 39121008 |
| UNSPSC 13.2   | 39121008 |
| UNSPSC 6.01   | 30211506 |
| UNSPSC 7.0901 | 39121008 |

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27230207 |
| eCl@ss 4.1 | 27230207 |
| eCl@ss 5.0 | 27230207 |
| eCl@ss 5.1 | 27230207 |
| eCl@ss 6.0 | 27230207 |
| eCl@ss 7.0 | 27230207 |

### Approvals

#### Approvals

---

Approvals

GOST

---

Ex Approvals

---

Approvals submitted

# Connection distributor - PSM PTK-4 - 2799364


## Approvals

### Approval details



## Drawings

### Circuit diagram

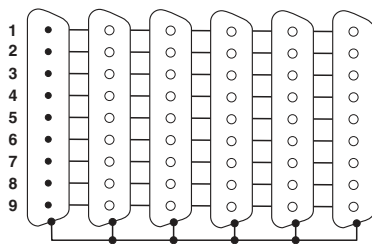

### Dimensioned drawing

