


REV. 0
DCO 170672

COIL: @ 25°C	
RESISTANCE	10000 OHMS $\pm 10\%$
NOMINAL VOLTAGE	4.0 mADC
MUST OPERATE	2.0 mADC
MUST RELEASE	1.0 mADC MAX 0.20 mADC MIN

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 15 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:
 OPERATE TIME 15 MS MAX.
 RELEASE TIME 10 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

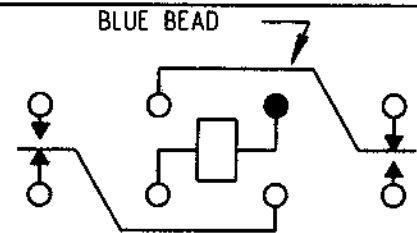

TERMINAL VIEW

CONTACT RATING:	
LOW LEVEL TO	
2 AMPS 28 VDC RESISTIVE	
100,000 OPERATIONS	

DR. ASB 10 JUL 02

Signature 7/11/02

Cil Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-143 REV.

3SAT RELAY

3SAT1360A2