

# 25 Watts

## AEV

**Total Power:** 25 Watts  
**Input Voltages:** 24V or 48V  
**No. of Outputs:** Single, Dual



### Special Features

- Ideal for telecom/networking applications
- Standard Pinout - Low Profile
- Unencapsulated 2.0" x 2.5" x 0.33" package.
- 90°C Baseplate temperature
- Enable (on/off)
- 330kHz Switching frequency
- Under voltage lockout, OVP, OCP

### Environmental

Operation case temperature range: -25°C to +90°C  
 Storage temperature: -40°C to +105°C  
 MTBF > 2 Million Hours (Bellcore TR332)

### Safety

**UL** UL1950  
**CAN** CAN22.2-950  
**TUV** EN60950  
**CE** CE Mark

### Electrical Specs

#### Input

Input range 18-36 Vdc (24 Vdc nominal)  
 36 - 72Vdc (48Vdc nominal)

Input reverse voltage protection Fuse recommended  
 Input surge voltage 100V for 100mS (48V)  
 50V for 100mS (24V)

Undervoltage lockout Vin<30-36V (48V)  
 Vin<14-18V (24V)  
 Efficiency 83% typical (5Vout)

#### Output

Voltage tolerance ±1.0%

Line regulation ±0.1%

Load regulation ±0.5%

Noise/ripple 75mV P-P

Short circuit protection Continuous power cycle  
 Overvoltage protection 36V to 42V (24Vin)  
 72V to 82V (48Vin)  
 Transient response 4% Vo typ; recovery <200msec typ  
 (25% step load change)

Temperature coefficient ±0.02%Vo/°C  
 Switching frequency 330kHz

#### Control

Enable on = >7.0Vdc  
 off = >3.5Vdc  
 See TRN  
 Enable current 0.6ma max.  
 Output trim 90% to 110% Vo

#### Isolation

I/O isolation 500Vdc

AMERICAS

5810 Van Allen Way  
Carlsbad, CA 92008  
Telephone: 760-930-4600  
Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX, UK  
Telephone: 44 (1384) 842-211  
Facsimile: 44 (1384) 843-355

ASIA

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: 852-2176-3333  
Facsimile: 852-2176-3888





AEV

## Ordering Information

Input VDC	Output 1 Voltage	Output 2 Voltage	Efficiency	Model Number
18-36 V	3.3V @ 5.0A		80%	AEV05F24 (EOL)
18-36 V	5.0V @ 4.0A		83%	AEV04A24 (EOL)
18-36 V	12.0V @ 2.1A		85%	AEV02B24 (EOL)
18-36 V	15.0V @ 1.7A		86%	AEV02C24 (EOL)
36-72 V	3.3V @ 5.0A		80%	AEV05F48 (EOL)
36-72 V	5.0V @ 4.0A		83%	AEV04A48 (EOL)
36-72 V	6.0V @ 4.1A		86%	AEV04N48 (EOL)
36-72 V	12.0V @ 2.1A		86%	AEV02B48 (EOL)
36-72 V	15.0V @ 1.7A		86%	AEV02C48 (EOL)
18-36 V	+5.0V @ 2.0A	-5.0V @ 2.0A	83%	AEV02AA24 (EOL)
18-36 V	+12.0V @ 1.05A	-12.0V @ 1.05A	86%	AEV01BB24 (EOL)
18-36 V	+15.0V @ 0.85A	-15.0V @ 0.85A	86%	AEV01CC24 (EOL)
36-72 V	+5.0V @ 2.0A	-5.0V @ 2.0A	83%	AEV01AA48 (EOL)
36-72 V	+12.0V @ 1.05A	-12.0V @ 1.05A	86%	AEV01BB48 (EOL)
36-72 V	+15.0V @ 0.85A	-15.0V @ 0.85A	86%	AEV01CC48 (EOL)

### Single output

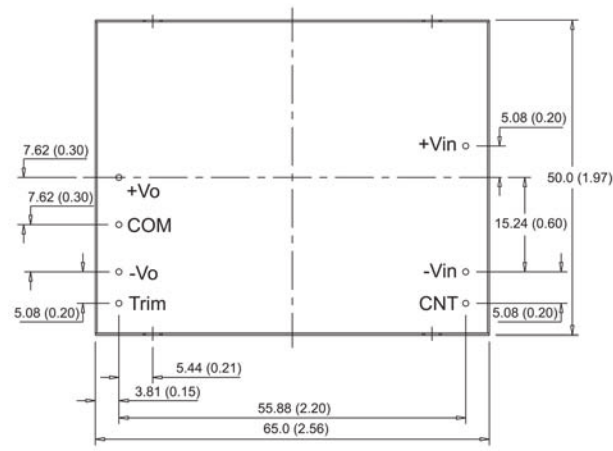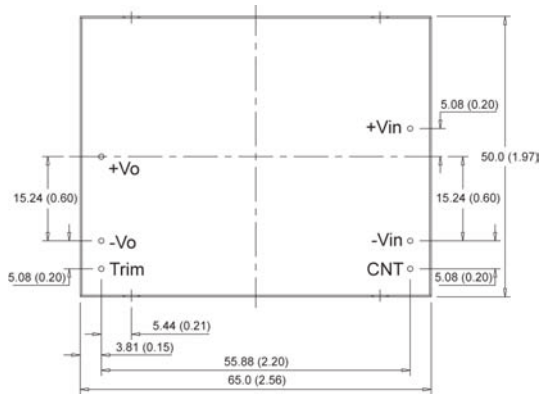

**Notes:**

- 20 MHz bandwidth. An external 2.2mf ceramic capacitor is recommended to be placed from +V out to -V out.
- Consult Technical Reference Notes for Recommended Input/Output Filtering
- All specifications are typical at nominal line, full load, and 25° C unless otherwise noted.
- All specifications subject to change without notice. Mechanical drawings are for reference only.