# 1-1546462-2 ACTIVE

### Buchanan | Buchanan 4DB Series

TE Internal #: 1-1546462-2

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 12 Position, 8.26 mm [.325 in] Centerline, 1 Row, Buchanan 4DB Series

View on TE.com >




Connectors > Terminal Blocks & Strips > Barrier Strips







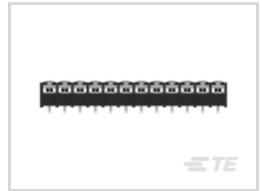



Barrier Strip Style: **Dual Barrier** 

Bottom Termination Type: Printed Circuit Pin

Connector System: Wire-to-Board

Number of Positions: 12

Centerline (Pitch): 8.26 mm [.325 in]

## **Features**

## Product Type Features

Block Style	Flat Bottom
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Levels	1
Number of Positions	12
Number of Rows	1
Electrical Characteristics	
Operating Voltage	150 V, 300 V
Body Features	
Primary Product Color	Black
Product Orientation	Right Angle
Barrier Strip Style	Dual Barrier

**Contact Features** 



PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	10 A, 20 A
Termination Features	
Bottom Termination Type	Printed Circuit Pin
Mechanical Attachment	
Screw Head Type	Wire Clamp Combo Head
Screw Plating Material	Zinc Chromate
Screw Material	Steel
Top Termination Type	Wire Clamp Combo Head
Mounting Options	None
Thread Size	6-32
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	8.26 mm[.325 in]
Dimensions	
Product Length	100.71 mm[3.965 in]
Wire Size	.3 – 3 mm²
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	16
Packaging Method	Tray
Other	
Terminal Blocks & Strips Comment	Do not order screw and captive clamp in combination with other top hardware.



## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



Also in the Series | Buchanan 4DB Series



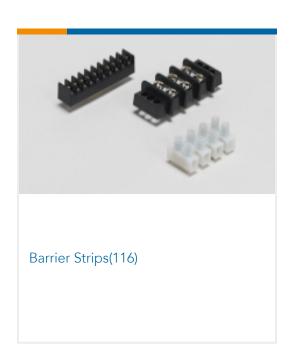

## Customers Also Bought









### **Documents**

Product Drawings

4DB-R108-12=4DB ASSEMBLY

English

**CAD Files** 

3D PDF

English

Customer View Model

ENG\_CVM\_1-1546462-2\_B1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_1-1546462-2\_B1.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_1-1546462-2\_B1.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1546462-2\_E.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1546462-2\_E.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1546462-2\_E.2d\_dxf.zip

English

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 12 Position, 8.26 mm [. 325 in] Centerline, 1 Row, Buchanan 4DB Series



3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

1-1773458-2\_BARRIER\_STRIPS\_QUICK\_REFERENCE\_GUIDE

English