
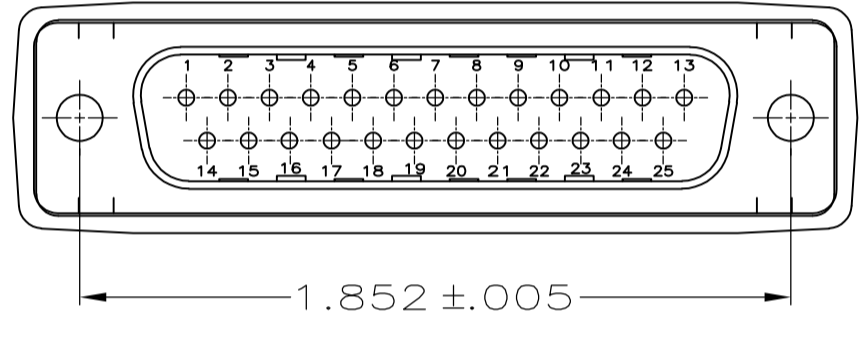
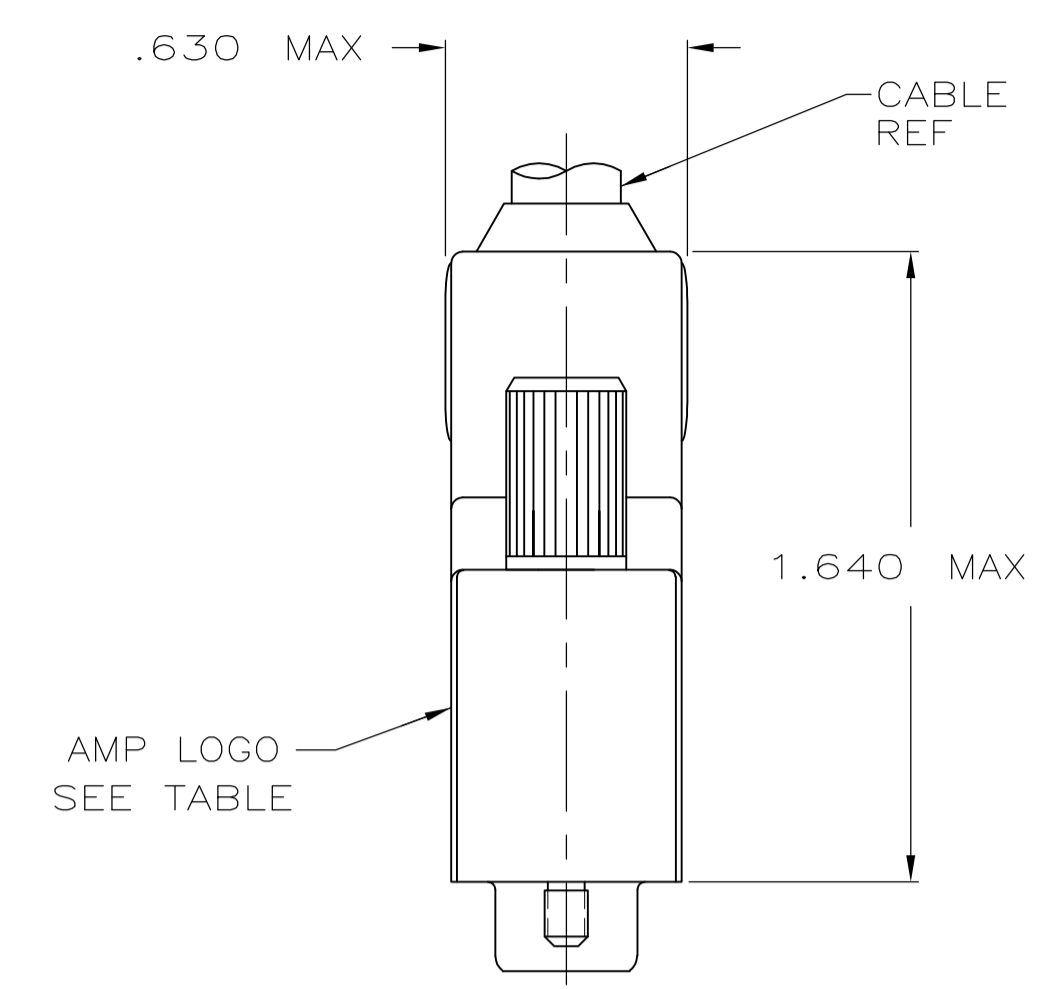


REVISIONS				
P	LTR	DESCRIPTION	DATE	BY
Z		REVISED PER ECO-17-002903	20MAR2017	AP DG

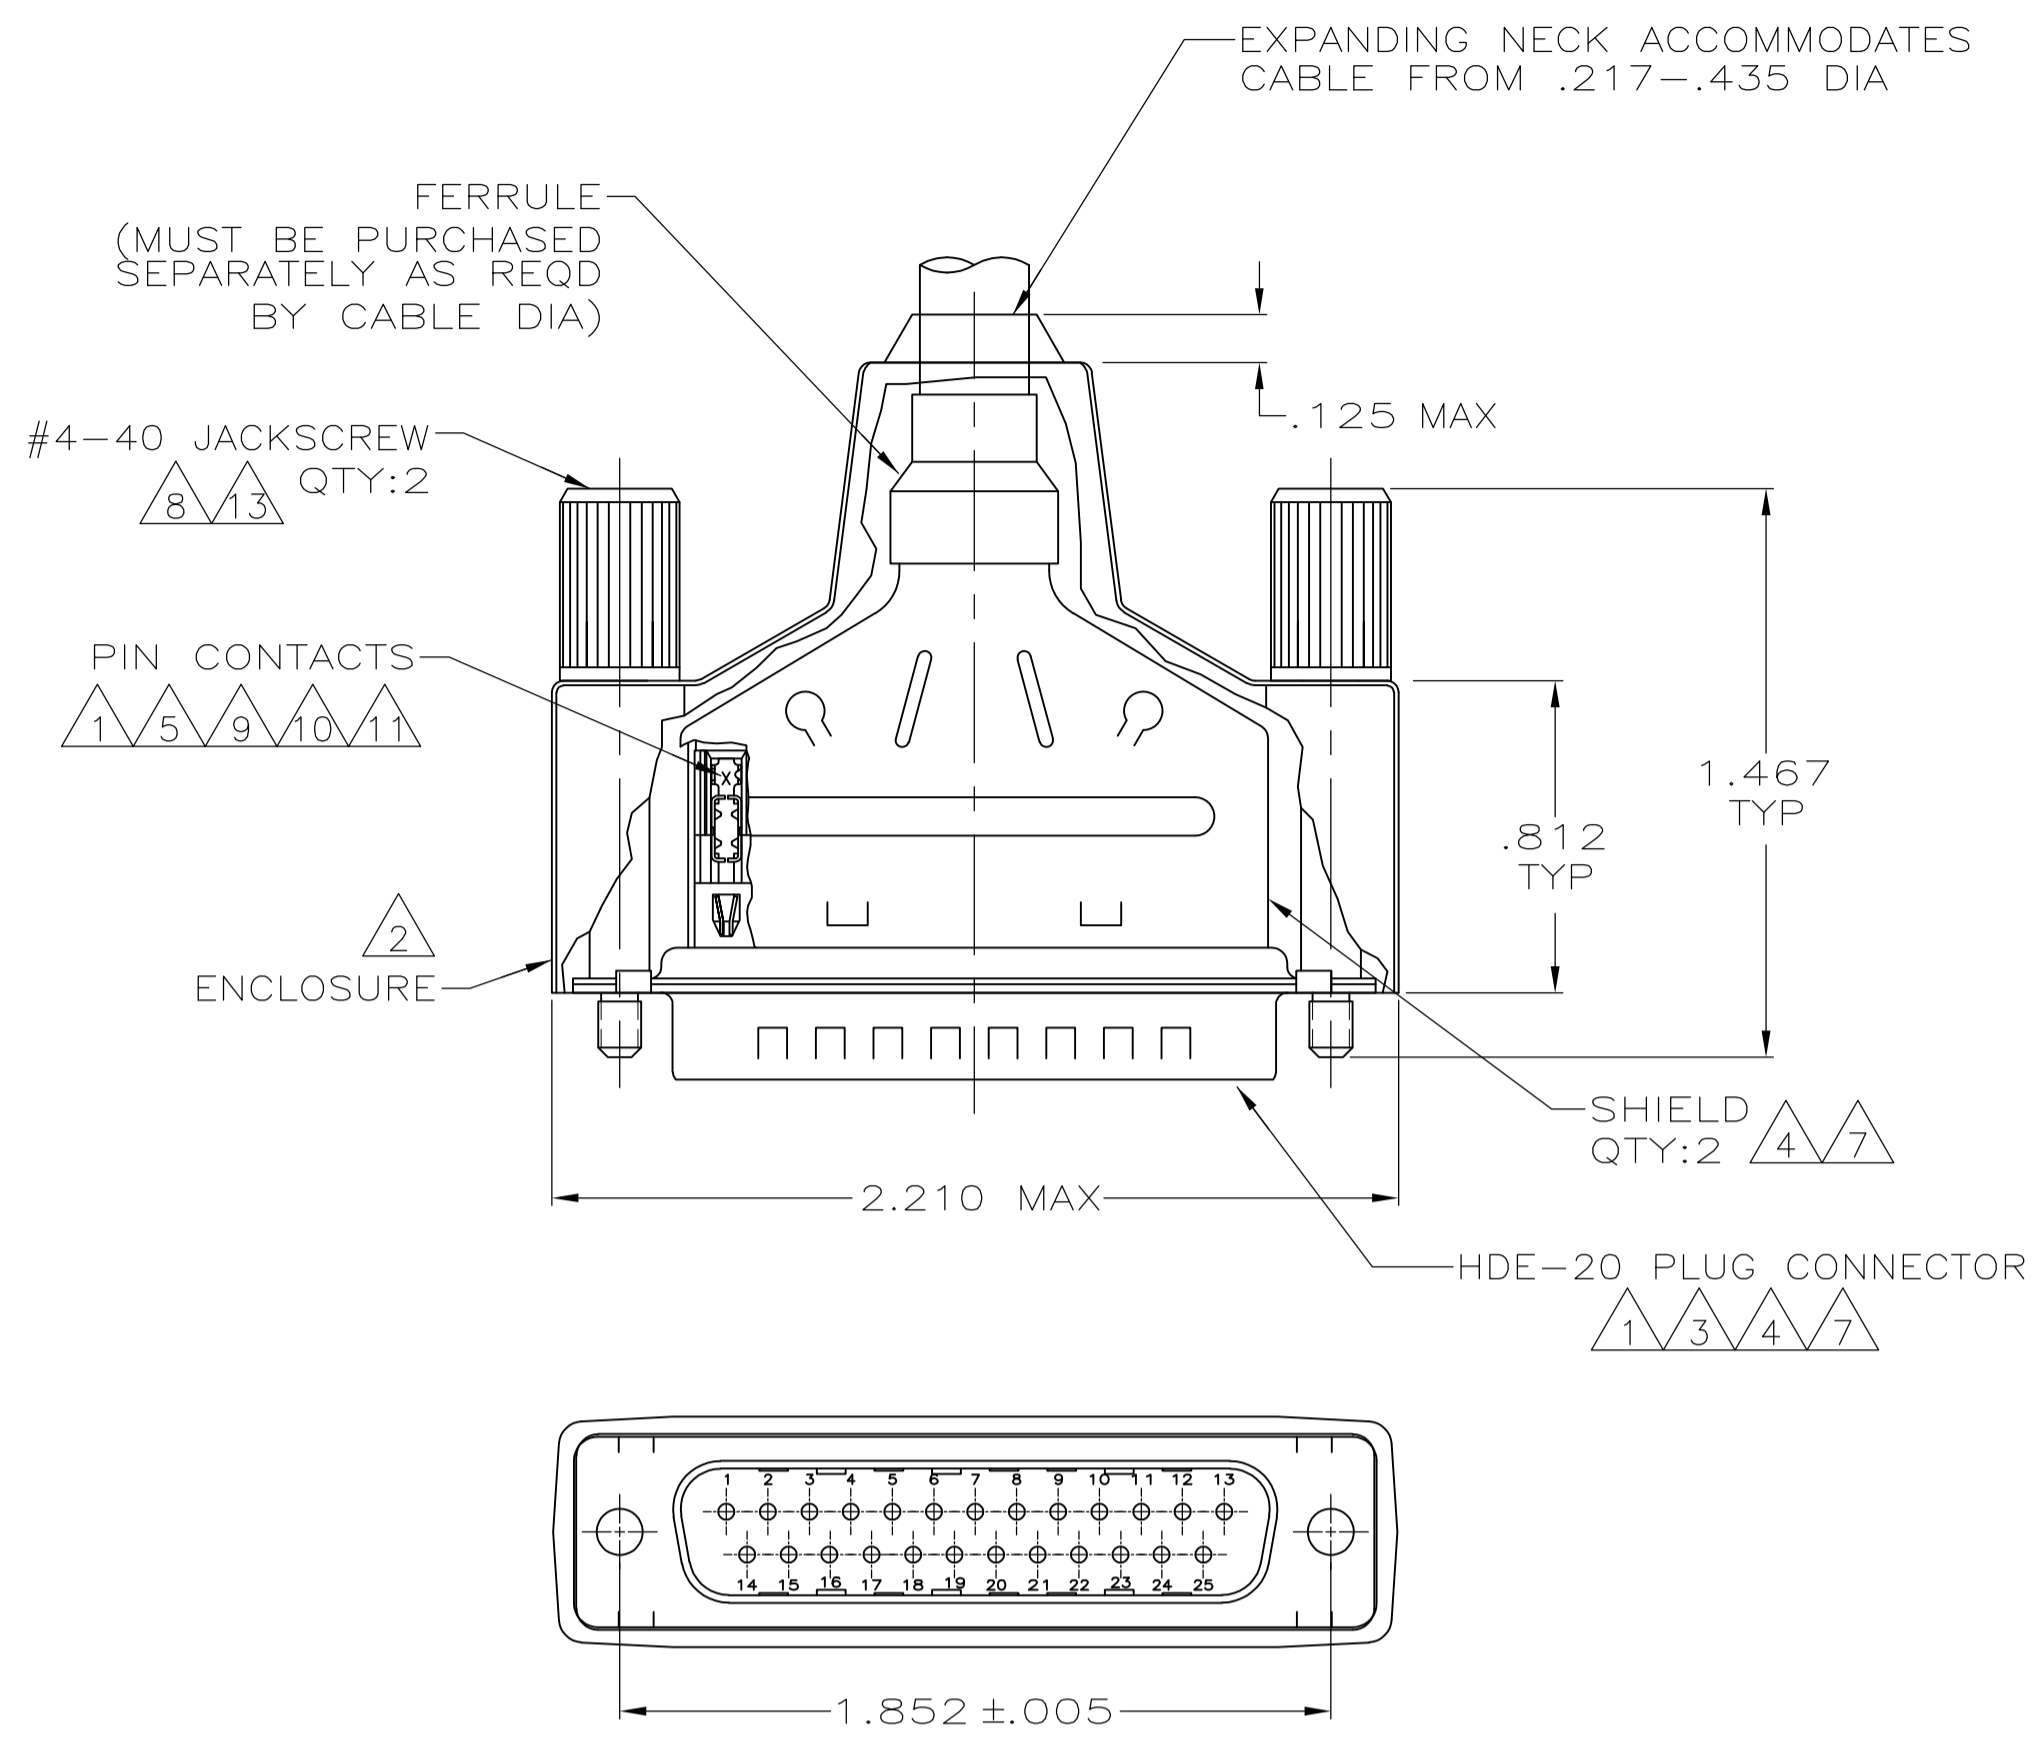

- 1 PLUG CONNECTOR FULLY LOADED WITH CONTACTS. ALL OTHER PARTS ARE SHIPPED UNASSEMBLED. EACH PART INDIVIDUALLY BULK PACKED.
- 2 FLAME RETARDANT 94V-0 RATED, POLYOLEFIN OR PVC, BLACK.
- 3 FLAME RETARDANT 94V-0 RATED, GLASS-FILLED, NYLON OR POLYESTER, BLACK.
- 4 STEEL PER ASTM A109.
- 5 PHOSPHOR BRONZE PER QQ-B-750.
- 6 GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727, ZINC PLATING PER B633, TYPE II, CLASS SCI, BLACK CHROMATE.
- 7 TIN PLATED.
- 8 BLACK ZINC FLAKE COATING.
- 9 CONTACTS PLATED GOLD FLASH FOR A LENGTH OF .150 MIN FROM MATING END, .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD IN WIRE TERMINATION AREA, ALL OVER .000030 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 10 PLATED WITH .000030 MIN GOLD FOR LENGTH OF .150 MIN FROM MATING END, WITH POINT OF MEASUREMENT .075 FROM MATING END OF CONTACT, .000100-.000200 TIN OR TIN LEAD ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- 11 NUMBER ON CONTACT INDICATES WIRE RANGE.
- 12 OBSOLETE PART NUMBER.
- 13 CARBON STEEL, C1022.
- 14 CONTACTS GOLD PLATED FOR A LENGTH OF .150 MIN FROM MATING END, .000030 MIN GOLD IN MATED AREA, .000100-.000200 MATTE TIN IN WIRE TERMINATION AREA, ALL OVER .000050 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
OR
CONTACTS GOLD PLATED FOR A LENGTH OF .150 MIN FROM MATING END, GOLD FLASH OVER PALLADIUM-NICKEL, .000030 MIN TOTAL IN MATED AREA, .000100-.000200 MATTE TIN IN WIRE TERMINATION AREA, ALL OVER .000050 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 15 CONTACTS PLATED GOLD FLASH FOR A LENGTH OF .150 MIN FROM MATING END, .000100-.000200 MATTE TIN IN WIRE TERMINATION AREA, ALL OVER .000030 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 16 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

REV	DESCRIPTION	DATE	BY	REV	DESCRIPTION
16	OBSOLETE			15	YES 3 20-22 1-747948-9
				15	YES 2 22-26 1-747948-8
				15	YES 1 26-30 1-747948-7
				14	YES 2 22-26 1-747948-6
				14	YES 1 26-30 1-747948-5
				9	NO 3 20-22 1-747948-2
				9	NO 2 22-26 1-747948-1
				9	NO 1 26-30 1-747948-0
				10	NO 3 20-22 747948-9
				10	NO 2 22-26 747948-8
				10	NO 1 26-30 747948-7
	SUPERCEDED			9	YES 3 20-22 -747948-6-
	SUPERCEDED BY 1-747948-8			9	YES 2 22-26 -747948-5-
				9	YES 1 26-30 747948-4
				10	YES 3 20-22 747948-3
	SUPERCEDED BY 1-747948-6			10	YES 2 22-26 -747948-2-
	SUPERCEDED BY 1-747948-5			10	YES 1 26-30 -747948-1-
	CONTACT FINISH	LOGO	WIRE RANGE	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .020	4 PLC ± -	ANGLES ± -
--------------------	--	-----------	-----------	-----------	--------------	-----------	------------

MATERIAL: 2 3 4 5 13

FINISH: 6 7 8

CONTACTS: SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: L. VARELA - DOCKS 11-17-04. CHK: J. GERACE 11-17-04. APD: M. WALMSLEY 11-17-04. NAME: M. WALMSLEY. PRODUCT SPEC: 108-40011 & 108-40030. APPLICATION SPEC: 114-40002. WEIGHT: 0.000000. SIZE: A1. CAGE CODE: 00779. DRAWING NO: 747948. RESTRICTED TO: CUSTOMER DRAWING. SCALE: 2:1. SHEET: 1 OF 1. REV: Z.

STE TE Connectivity

SHIELDING ENCLOSURE KIT, PLUG, SIZE 3, 25 POSN, AMPLIMITE HDE-20