

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

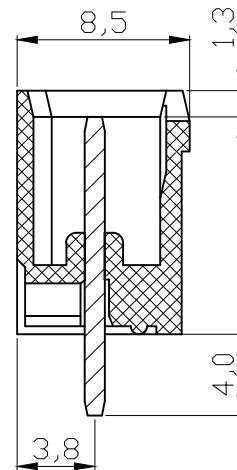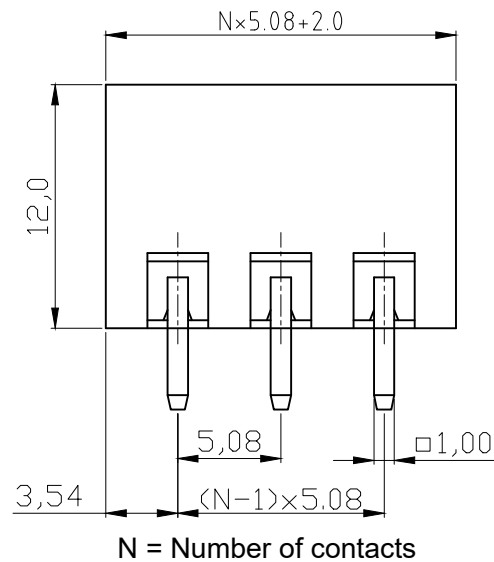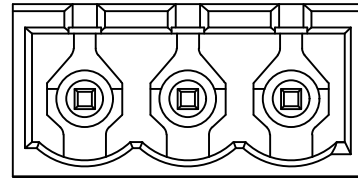

NOTES

Material

1. Terminal body (contact pin): Brass (CuZn) Tin plated
2. Insulator (housing): Thermoplastic (UL94V-0)

④ Electrical cULus


1. Voltage rating: 300VAC
2. Current rating: 20A
3. Withstanding Voltage: 1.6KV
4. Operating temperature: -40°C to +115°C
5. Soldering temperature: 250°C ± 10°C / 5 Sec
6. Safety Approval: US

Order code:

A-TB508-OQxxCV-xx

No. of contact: 02-24Pin
Color of insulator:
Blank: Green
BK: Black

P.C.B LAYOUT

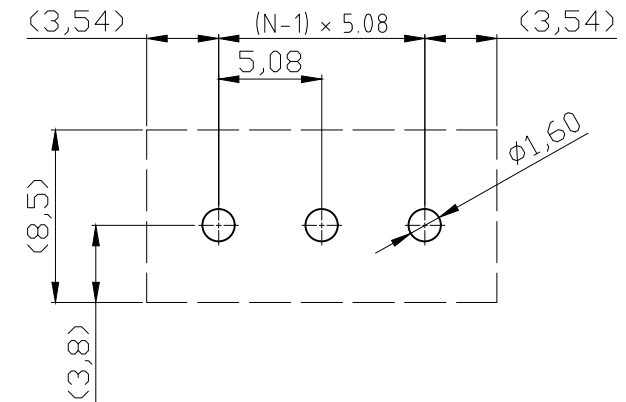

RoHS compliant
Unit: mm



File No.: E349947

| Scale | 1:1 | Date | 04.05.2009 | Name | Dean | Customer-No. | |
|-----------|-------|----------------------------|--------------|--------|----------|--------------|--------|
| TOLERANCE | | Drawn | 04.05.2009 | Dean | | | |
| X. | ±0.50 | ④ Update UL logo and notes | 12.04.2022 | Daniel | Approved | 12.04.2022 | Daniel |
| X.X | ±0.30 | ④ Add P/N | 28.04.2021 | Daniel | | | |
| X.XX | ±0.10 | ③ | | | | | |
| DIM | TOL | ② Update | 09.01.2009 | Amy | | | |
| X.° | ±1° | ① Drawn | 04.05.2009 | Dean | | | |
| X.X° | ±X° | ① | | | | | |
| Angle | TOL | Id. | Modification | Date | Name | Replace | Sheet |

ASSMANN WSW-No.
A-TB508-OQxxCV-xx

Drawing-No.
ASS 3502 CO rev04

1

2

3

4

5

6

7

SV1482