




**Sales Outline Drawing**

**Specifications:**

|                        |  |
|------------------------|--|
| Sound Level Category   | Medium   |
| Mode of Operation      | Slow Pulse @ 1 PPS for 15 Seconds, then 0.1s beep @ 1 PPS until reset. |
| Voltage Rating         | 9 to 16 VDC  |
| Frequency              | 3900 ± 500 Hz  |
| Loudness @ 1M          | 70 to 75 dB(A) Typ.  |
| Sound Current Draw     | 40mA MAX   |
| LED Color              | RED  |
| LED Current Draw       | 60mA MAX   |
| Total Max Current Draw | 100mA MAX  |
| Housing Material       | 6/6 Nylon, Color: Black  |
| Top Cap Material       | 6/6 Nylon, Color: Opaque White   |
| Storage Temperature    | -40° to +70° C   |
| Operating Temperature  | -30° to +60° C   |
| Mounting               | Recommended hole size is 22.5 mm.                                      |
| Knurled Nut            | The max recommended torque is 10 in-lbs.                               |
| Cable                  | Gray, UL Style 21894, 300V, 105°C, 24AWG, Pb-Free Tinned Leads         |
| Weight (Typical)       | 105 grams  |
| NEMA 12                | Approved with use of included gasket.                                  |
| Options                | Please contact factory.  |

**Dimensions:** Inches (mm) **cUL Recognized** **ROHS Compliant**

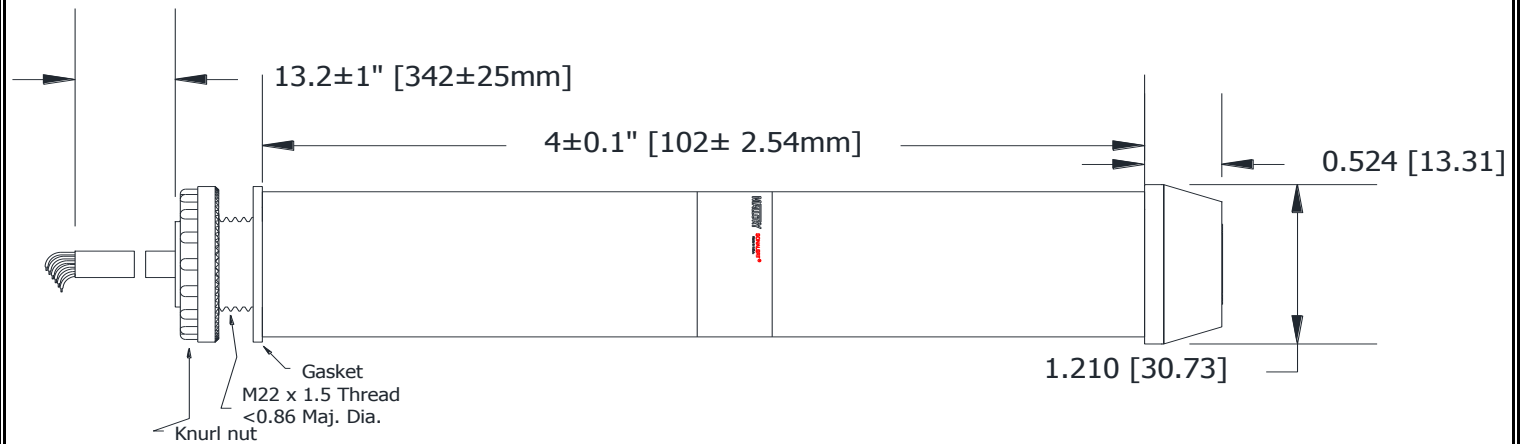

Connections:  
**SOUND** BLACK wire to Ground and **ORANGE** wire to Positive  
**TOP** BROWN wire to Ground and **RED** wire to Positive