


Magnetic Mount Dual Band Antennas

The MDBM dual band mobile antennas provide omnidirectional coverage in cellular and PCS frequencies. They feature a magnetic mount base with protective surface that facilitates secure installation without damage to the vehicle.

Features

- Dual-band design
- Magnetic base for installation on iron base materials
- High roof mounting force
- Protective surface prevents scratches on the vehicle's surface

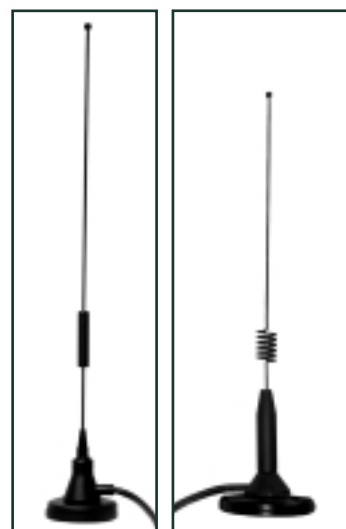

MDBM800/1900 MDBM824/1850

Electrical Specifications

VSWR:
2.0 across the band (MDBM800/ 1900)
<1.5:1 across each band (MDBM824/ 1850)

Polarization:
Vertical

Nominal Impedance:
50 Ohms

Antenna Type:
Collinear dual band, closed coil (MDBM800/ 1900)
Collinear dual band, open coil (MDBM824/ 1850)

Connector Options:
Male SMA
Male TNC
Mini-UHF
SMB

Mechanical Specifications

Radiator Material:
Stainless steel, black chrome plated

Antenna Base:
Molded high strength plastic

Mounting Base:
Black coated stainless steel

Boot:
Rubber

Magnet Mounting Force:
105.8 ounces minimum (MDBM800/ 1900)
300 ounces minimum (MDBM824/ 1850)

Antenna Height:
14.37" (MDBM800/ 1900)
10.5" (MDBM824/ 1850)

Model #	Frequency Range	Gain	Cable	List Price
MDBM800/ 1900	824-896/ 1850-1990 MHz	2 dBi @ 824-896 MHz 2 dBi @ 1850-1990 MHz	14' RG58/ U	
MDBM824/ 1850	824-896/ 1850-1990 MHz	2 dBi @ 824-896 MHz 4 dBi @ 1850-1990 MHz	14' RG58/ U	