



VIEW X-X
SCALE 1:1
PER EIA/TIA 568B

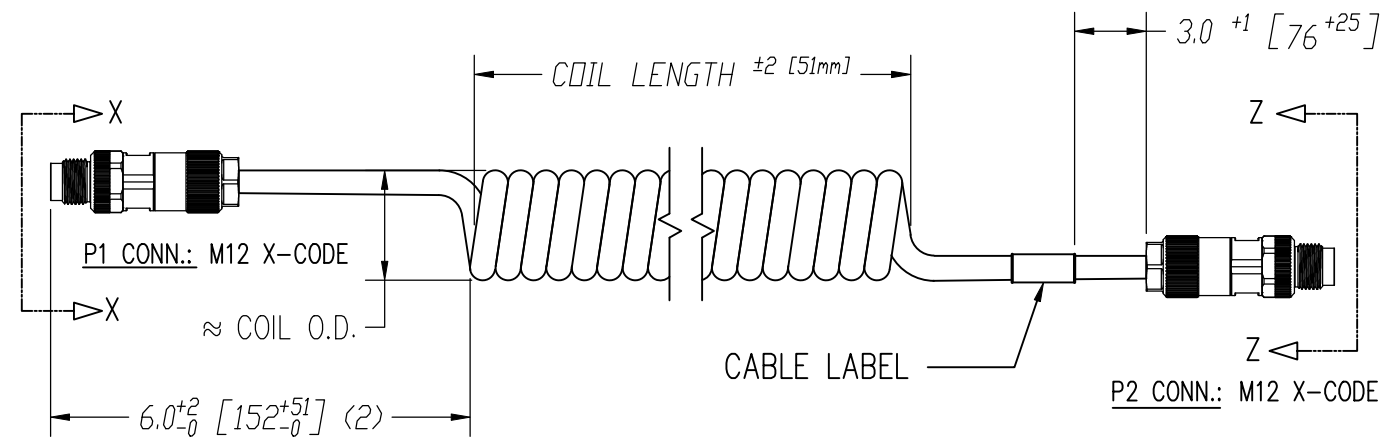

VIEW Z-Z
SCALE 1:1
PER EIA/TIA 568B

DATE	REV	ECN	APP'D. BY
09/08/21	A0	11830	ADB
09/16/21	A1	11846	ADB
09/23/21	A2	11849	ADB
12/13/22	A3	12082	GWL


NOTES:

- M12 CONNECTOR COMPONENTS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACTS: COPPER ALLOY
SHELL: COPPER ALLOYS AND ZINC ALLOY
SEALING: NBR
CONTACT PLATING: UNDERPLATE: 50u"~70u" NICKEL
CONTACT AREA: 10u" GOLD


CABLE CONSTRUCTION:
CONDUCTOR: 26 AWG 7/34 STRANDED TINNED COPPER
INSULATION: HIGH DENSITY POLYETHYLENE
CABLE: (4) TWISTED PAIRS TWISTED TOGETHER AND WRAPPED WITH
A FOAM POLYPROPYLENE TAPE TO FORM CABLE CORE
SHIELD: 38 AWG TINNED COPPER BRAID OVER CABLE CORE. A SECOND
SHIELD OF ALUMINIZED POLYESTER FOIL OVER BRAID
JACKET: ZHFR POLYURETHANE, TEAL, .261 DIAMETER.
NOMINAL PULL FORCE OF COIL**: $F(\text{LBS}) = (1.35 * X) - 1.00$
 $X = (\text{EXPANDED LENGTH}) / (\text{CONTRACTED LENGTH})$
- ELECTRICAL TESTING:
100% TRANSMISSION TESTED FOR CAT 5E CHANNEL PERFORMANCE,
WIRE MAP, CONTINUITY, SHORTS, DWV AT 500 VDC
- PACKAGING:
ONE CABLE PER BAG

P/N STRUCTURE:

BM-CBMMxxxFA

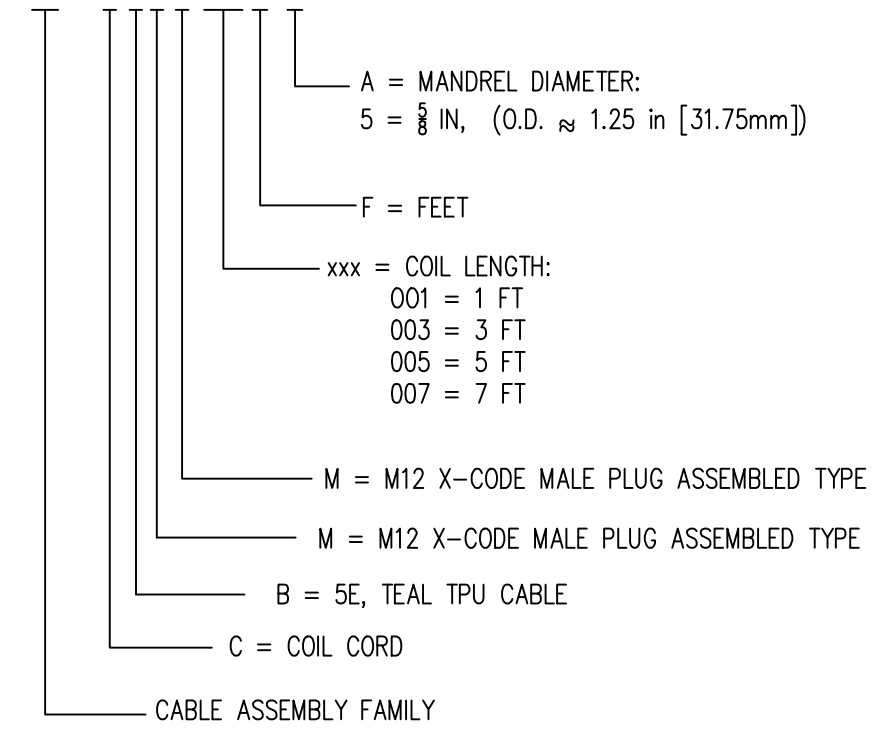

PIN ASSIGNMENT

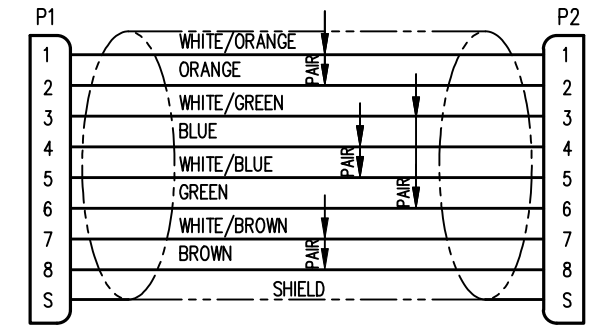

568B STANDARD WIRING MAP

PIN NUMBER / WIRE COLOR CROSS REFERENCE		
IEC 61076-2-109	TIA/EIA 568B	WIRE COLOR
1	1	WHITE-ORANGE
2	2	ORANGE
3	3	WHITE-GREEN
4	6	GREEN
5	7	WHITE-BROWN
6	8	BROWN
7	5	WHITE-BLUE
8	4	BLUE

PART NUMBERS REFERENCE TABLE			
PART NUMBER	COIL LENGTH	MAX EXT LENGTH	≈ COIL O.D.
BM-CBMM001F5	1 FT [.3M]	6 FT [1.8M]	1.25 IN [31.75mm]
BM-CBMM003F5	3 FT [.9M]	18 FT [5.5M]	1.25 IN [31.75mm]
BM-CBMM005F5	5 FT [1.5M]	30 FT [9.1M]	1.25 IN [31.75mm]
BM-CBMM007F5	7 FT [2.1M]	42 FT [12.8M]	1.25 IN [31.75mm]

** USE FOR APPROXIMATION ONLY. VALIDATION BASED ON 1 FT LONG COIL BODY 1.25 O.D



THIRD ANGLE PROJECTION	<p>11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com</p>
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	
DIMENSIONS: INCHES [METRIC]	TITLE: M12 X-CODE MALE TO M12 X-CODE MALE COIL CORD
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.008 [0.20] ANGLES ARE ± 1°	DRN BY: GWL DATE: 02-19-21
SHEET NO. 1 OF 1	APPD BY: ADB DATE: 09-08-21
	DWG NO. CT999249 REV. A3