

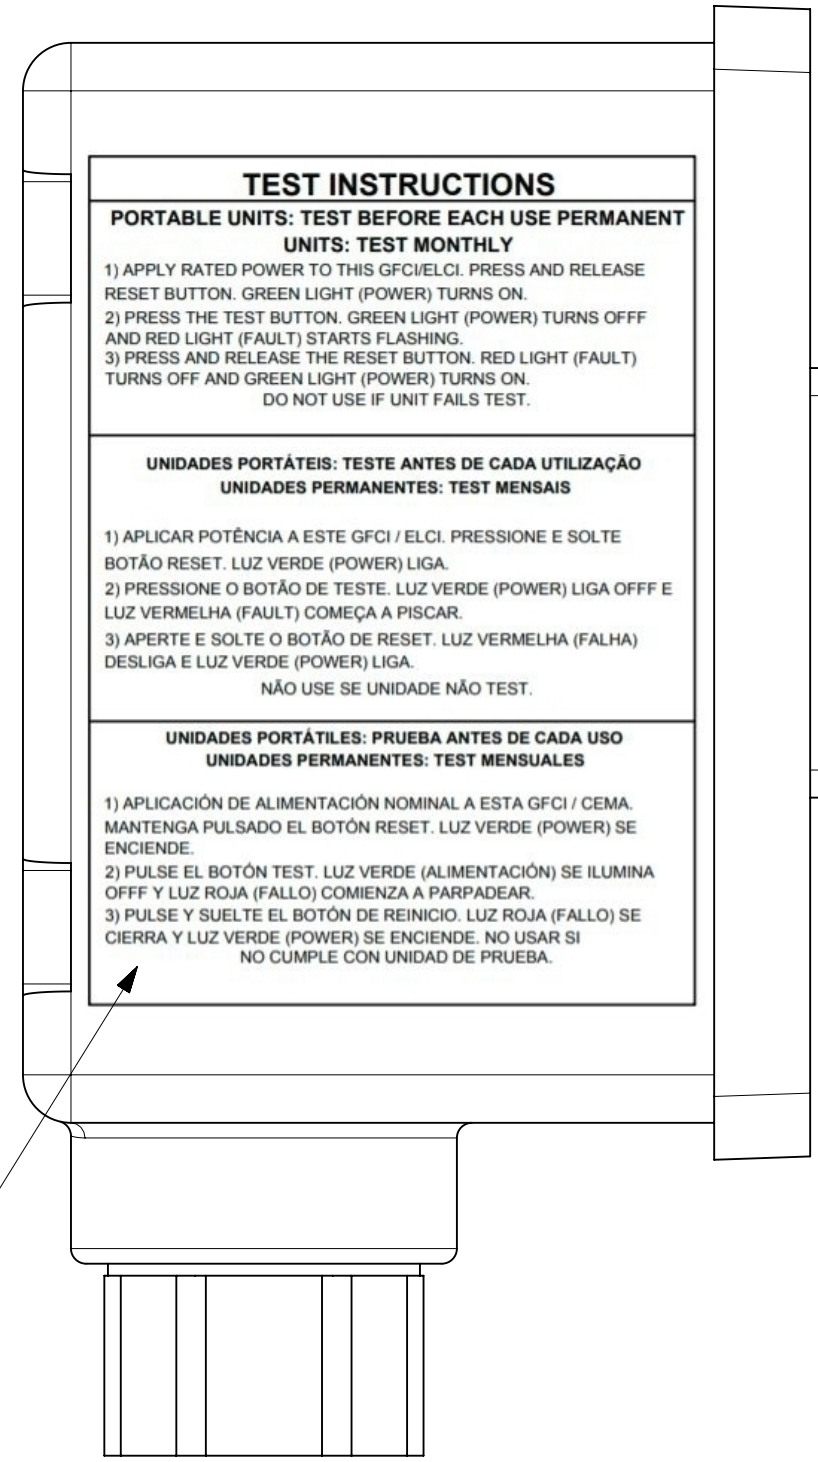


#6-18 X 3/4" PHILLIPS PAN HEAD SHEET METAL SCREW TYPE A, 18-8 STAINLESS STEEL

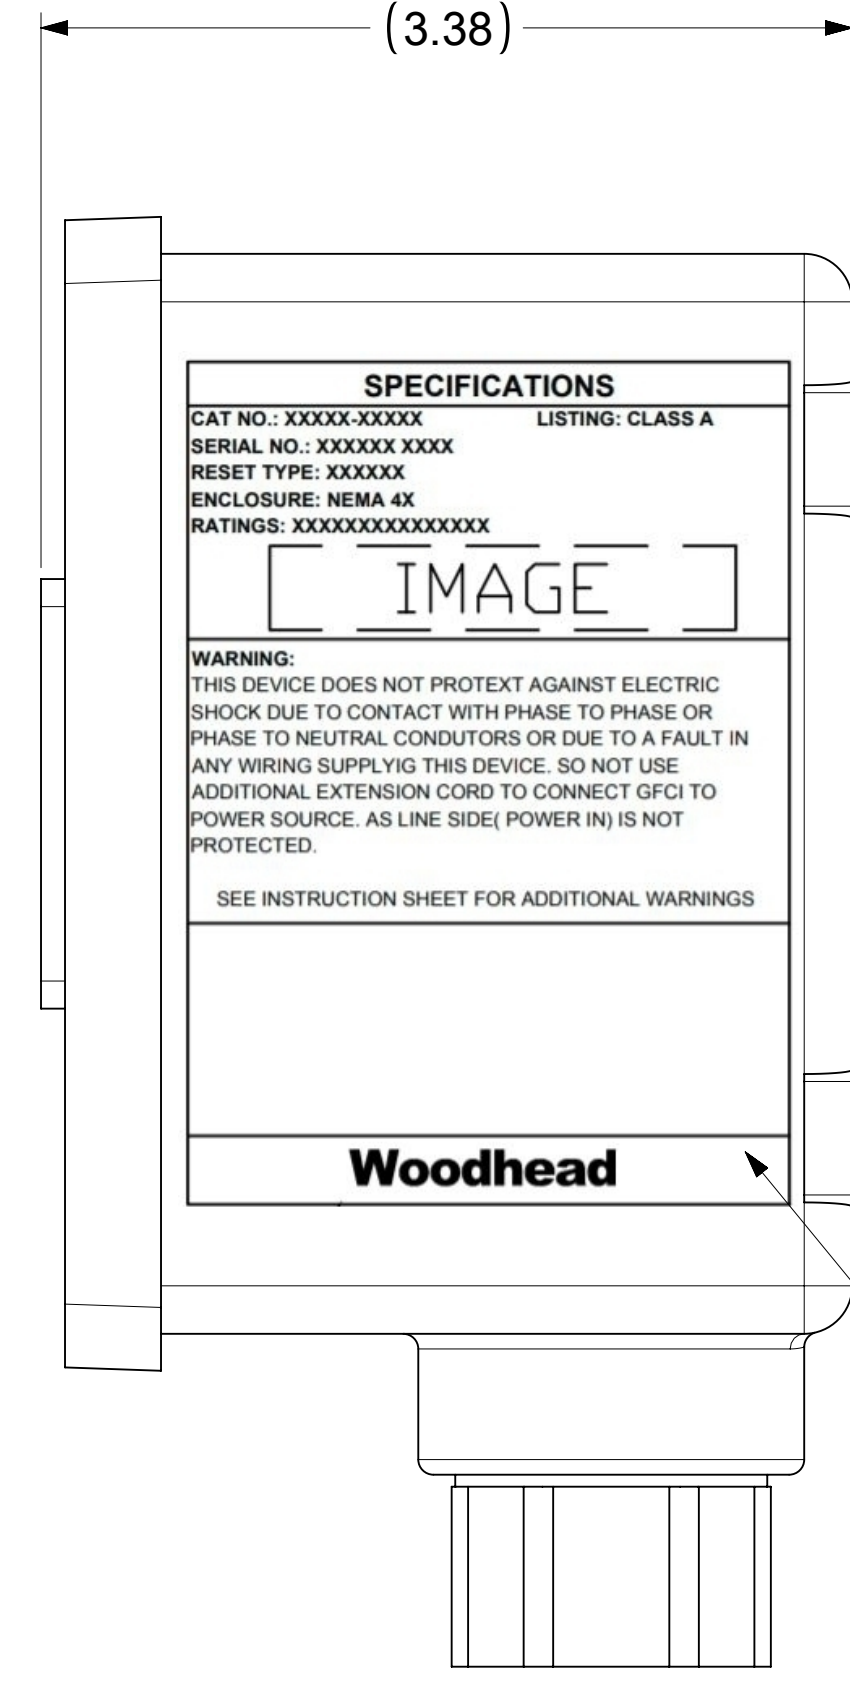

TEST INSTRUCTIONS LABEL

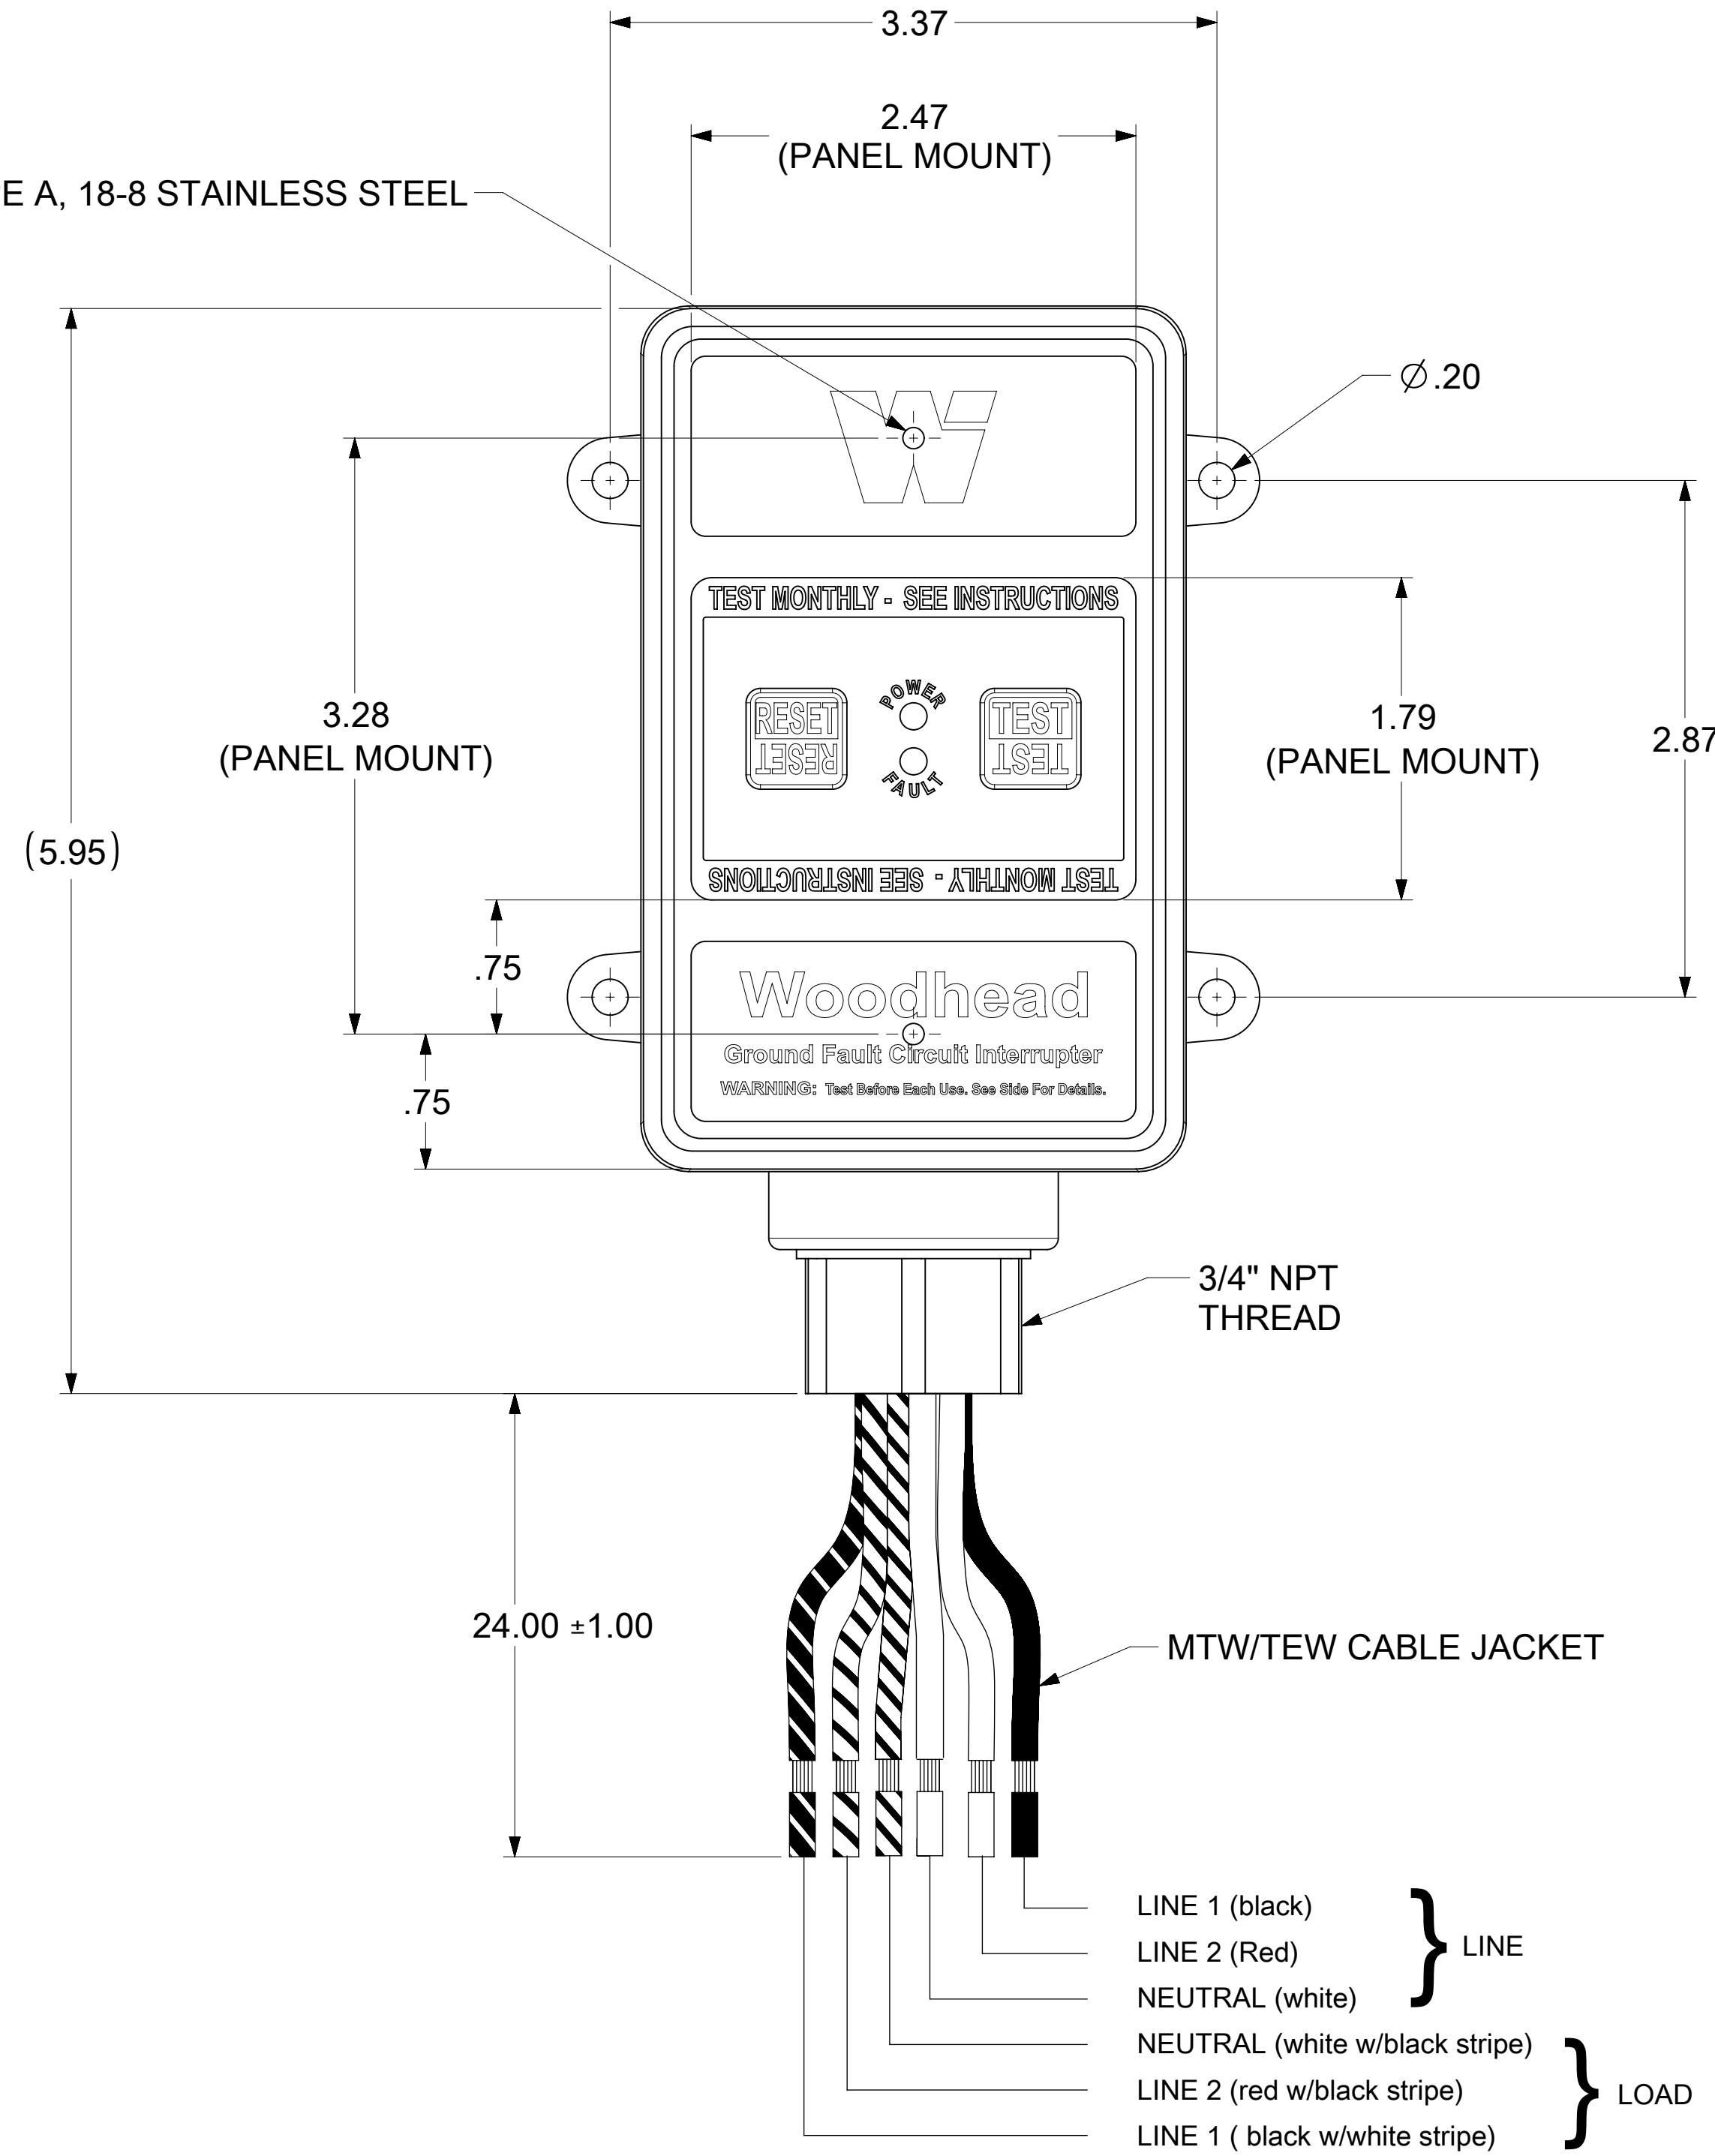

SPECIFICATIONS LABEL

**TECHNICAL**

- LISTED: UL & CSA
- RATED SUPPLY VOLTAGE: 240VAC
- RATED CURRENT: UP TO 30 AMPS
- RESET TYPE: AUTOMATIC OR MANUAL
- OPERATING FREQUENCY: 60 Hz
- TYPE: CLASS A
- GROUND TRIP CURRENT: 5mA +/- 1mA
- OVERLOAD CURRENT: 180 AMPS, 0.45PF
- INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
- ENDURANCE OPERATIONS: 3000 OPERATIONS
- ENCLOSURE: NEMA 4X/6P

| RESET TYPE | MATERIAL NO. | ENGINEERING NO. | PHASE        |
|------------|--------------|-----------------|--------------|
| MANUAL     | 1301530264   | 30051-2MF       | SINGLE PHASE |
|            | 1301530266   | 30053-2MF       | SINGLE PHASE |
| AUTOMATIC  | 1301530263   | 30051-2AF       | SINGLE PHASE |
|            | 1301530265   | 30053-2AF       | SINGLE PHASE |

FUNCTIONAL SYMBOLS: FA=0, FC=0, FP=0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE: INCH NTS

GENERAL TOLERANCES (UNLESS SPECIFIED):  
 4 PLACES ± 0.13 ± 0.015  
 3 PLACES ± 0.13 ± 0.015  
 2 PLACES ± 0.13 ± 0.015  
 1 PLACE ± 0.25 ± 0.02  
 0 PLACES ± ±

ANGULAR TOL ± 0.5°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: MIGRATION TO ECTR/NX

EC NO: 666699  
 DRWN: PPURSUTANDEL 2021/07/09  
 CHK'D: DNGUYEN62 2021/08/05  
 APPR: HKNEELAND 2021/08/17

INITIAL REVISION:  
 DRWN: BARDEN 2014/04/25  
 APPR: JFMURPHY 2014/08/02

**molex**

30A 240VAC FIXED GFCI  
 SINGLE PHASE #10AWG WIRE LEADS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER: SD-130153-042  
 DOC TYPE: PSD  
 DOC PART: 001  
 REVISION: A1

DRAWING: D-SIZE  
 SERIES: 130153  
 MATERIAL NUMBER: SEE TABLE  
 CUSTOMER: GENERAL MARKET  
 SHEET NUMBER: 1 OF 1