
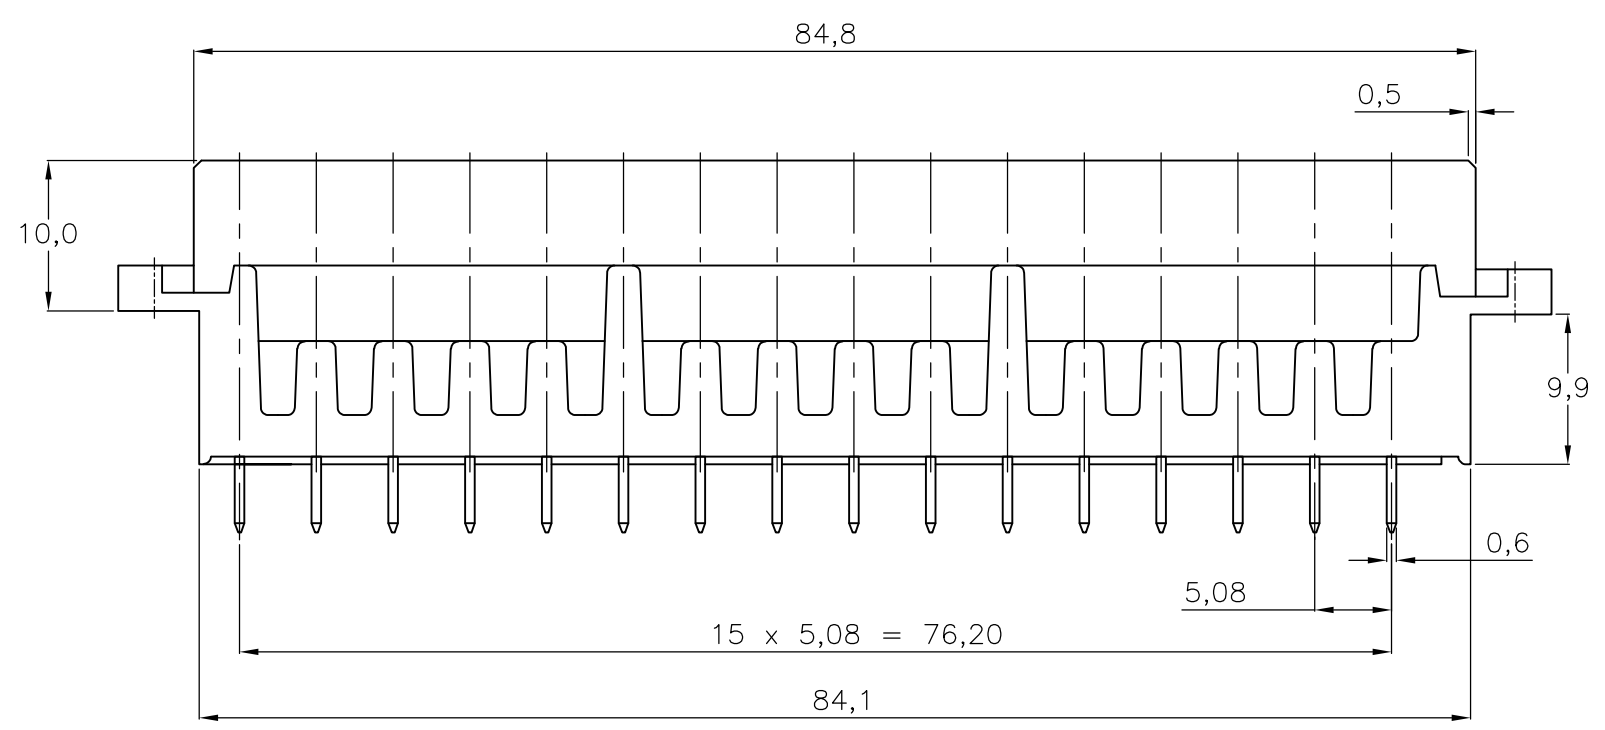
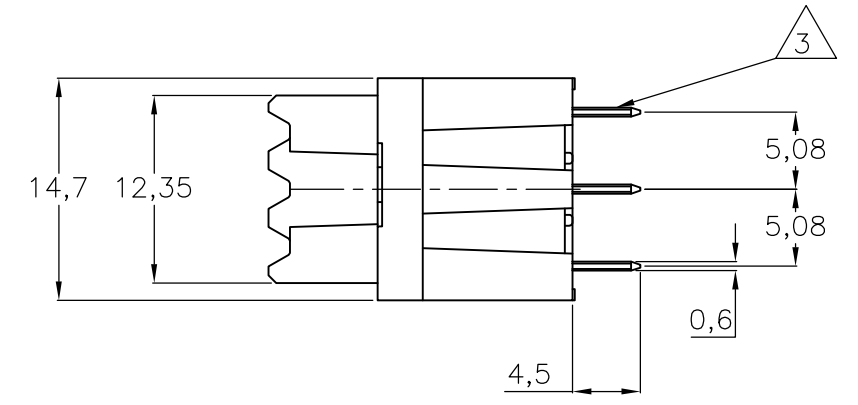


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		G		REVISED PER ECO-15-005333	07JUL2015	AP	RP

NOTES:

- 1 MATERIAL : - HOUSING : POLYESTER G.F.
COLOUR : GREY.
- CONTACTS : PHOSPHORBRONZE.
- 2 FINISH : -1 AT CONTACT AREA EIC 60603-2 PERFORMANCE LEVEL I OVER NICKEL.
AT POST AREA 2.5µm Sn OVER 1.25µm Ni.
-4 AT CONTACT AREA EIC 60603-2 PERFORMANCE LEVEL II OVER NICKEL.
AT POST AREA 2.5µm Sn OVER 1.25µm Ni.
-7 SAME AS -1 ONLY 2,0µm AU.
-8 AT CONTACT AREA EIC 60603-2 PERFORMANCE LEVEL III OVER NICKEL.
AT POST AREA 2.5µm Sn OVER 1.25µm Ni.
- 3 SOLDERPOSTS SUITABLE FOR 0,80±0,05 OR 1,0±0,1 NOM DIA HOLES.

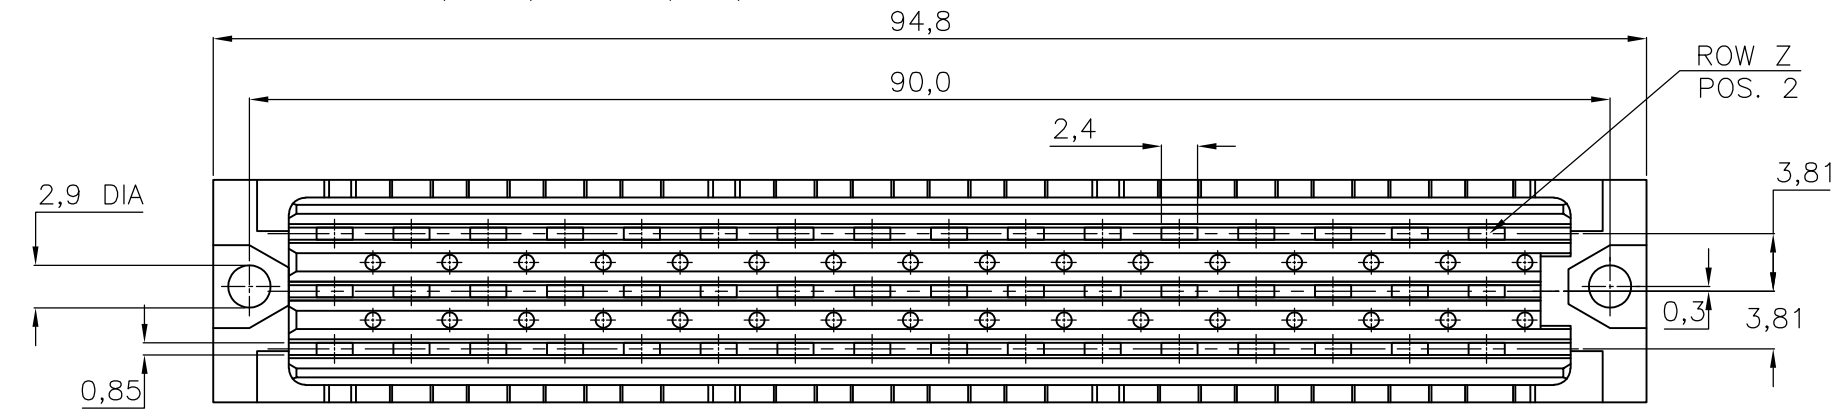

OBSOLETE	SEE NOTE	SEE NOTE	9-166733-4
OBSOLETE			166733-8
OBSOLETE			166733-7
			166733-4
			166733-1
	FINISH	MATERIAL	PARTNUMBER

ROW	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
POS	32	30	28	26	24	22	20	18	16	14	12	10	8	6	4	2				

AN ASTERISK „X” DENOTES A CONTACT.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.V.LOKVEN 28JUN91
 CHK J.GIBBELS 27MAY97
 APVD -
 PRODUCT SPEC -
 APPLICATION SPEC -
 WEIGHT -

STE TE Connectivity

3x16 POS. TYPE F FEMALE
 B. T. B. SOLDER CONNECTOR

SIZE A3 CAGE CODE 00779 DRAWING NO C-166733 RESTRICTED TO -

CUSTOMER DRAWING SCALE NTS SHEET 1 OF 1 REV G