

HC-B 10-TFQ-45/M1PG16G


Order No.: 1771257



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771257>

Sleeve housing, for double locking latch, height 45 mm, with screw connection, 1x Pg16, straight cable entry

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 035990 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 484 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
02/17/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 45 mm |
| Width | 43 mm |
| Length | 73 mm |

| | |
|---------------------------------|--------------------------|
| Housing type | Sleeve housings |
| Locking type | For double locking latch |
| Cable exit | Straight |
| Type of the screw connection | 1x Pg16 |
| Pg screw connection | With |
| Wrench size, union nut | 22 mm |
| External cable diameter | 7.5 mm ... 15 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Cable gland material | Nickel-plated brass |
| Cable seal material | NBR |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

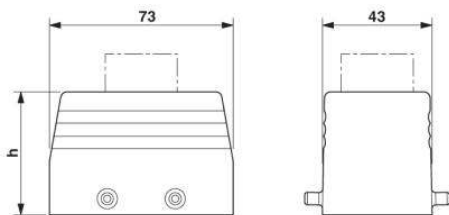

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;