


Conductor markers SFX 10/23 MC NE GN V2

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

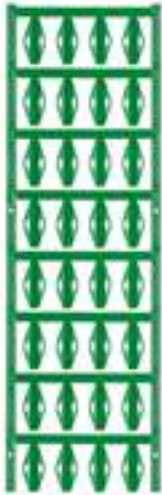

SlimFix X is a conductor and cable marker system with a space-saving design. The markers can be fitted even after the wiring has been installed. They are made from halogen-free material and conform to flammability rating V0. SlimFix is an acknowledged and approved marker type in transport engineering. Attaching even small markers is no problem with the **SF tool**.

- Halogen-free material
- Flammability rating V0
- Approved and listed markers for traffic engineering
- Attach to conductor cross-sections above 16.0 mm² with cable ties
- Markers in proven multicard format

General ordering data

Order No.	1007590000
Type	SFX 10/23 MC NE GN V2
Version	Conductor markers, MultiCard, 23 x 10 mm, Polyamide 66, Colour: Green
GTIN (EAN)	4032248709762
Qty.	160 pc(s).

**Conductor markers
SFX 10/23 MC NE GN V2**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	23 mm	Width	10 mm
Height	0.8 mm	Net weight	0.613 g

Markings

Cadmium	< 75 ppm	Can be labelled with thermal transfer printers	No
Can be printed with plotter	Yes	Can be written with dot-matrix printer	No
Can be written with laser printer	No	Colour	Green
Conductor O.D.	7 - 317 mm	Conductor cross-section, max.	500 mm ²
Conductor cross-section, min.	16 mm ²	Halogen	No
Insulation cross-section, max.	40 mm	Material	Polyamide 66
Material colour according to resistance code	5	Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C	Pin can be written (STI)	Yes
PrintJet	Yes	Silicone	No
Size of labelling field	23x5 mm	Speed marking laser	Yes
Type of printing	blank	UL 94 flammability rating	V-2

Classifications

ETIM 3.0	EC001530	UNSPSC	30-21-18-01
eClass 5.1	27-14-91-03	eClass 6.2	27-14-91-29
eClass 7.1	27-14-91-29		

Approvals

Approvals	
ROHS	Conform