


—	G	П	т	0

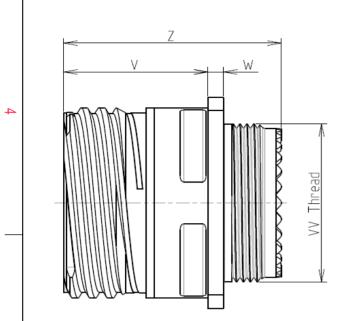

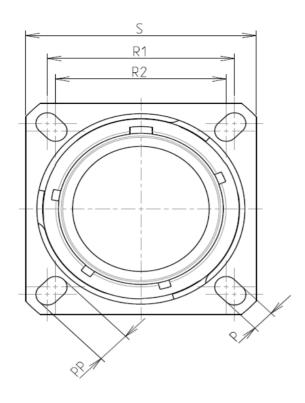



Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 500 hours -Salt Spray

: 38.69 g ± 10%

8D 0

G

13

Κ


А

F

26

Е

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 23.01 R1 20.62 R2 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD

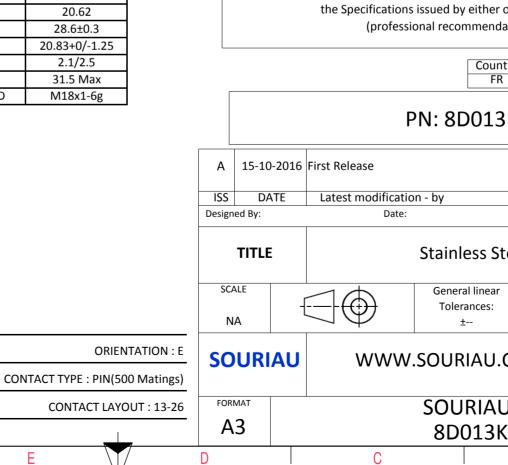

0		Ξ		A				
						4		
LAY	YOUT SHOWN AS EXA	AMPLE				3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D013K26AE								
Latest modificatio	n - hy				MOD N°	-		
Date:	~,		CUSTOME	R DRAWING				
Stainless Steel Receptacle 8D series								
10	General linear		NPRDS	DS / PROJECT				
$\exists \Psi$	Tolerances: ±		8	59		1		
Image: Constraint of the property of the proper								
	SOURIAU I	DRG N°	1		SHEET			
	8D013K2	6AE-C			1/2			
С		В		А				

Contact Layout 26 Source FLange Receptacili REAR MOUNTING REAR MOUNTING Contact Layout		l Cutou
		2
	ØL	
2#12 6#22D	ØT.	
13-26	1 191	
Ctc X Y	\ØA_	
A 0 3.47 B 2.47 4.34		
C 2.47 -4.34	Dim ØA	_
CO D 0 -3.47 E -2.47 -4.34	ØAA R1	
F -2.47 4.34	ØТ	
1 3.25 0 2 -3.25 0		
the Specification	se of the Produ	icts whi ther of
N		Country FR
	PN: 8DC	
A 15-10-2016 First Release		
TITLE	Stainles	s Ste
SCALE NA	General li Tolerano ±	ces:
SOURIAU WWW	V.SOURIA	۱U.C
FORMAT A3	SOUR 8D01	
H G F E D C		

