



Electrical specifications

Center Frequency: 2700 MHz
Bandwidth: 50 MHz
VSWR: 16 dB min.
Input / Output Impedance: 50 Ohms
Passband: 2675-2725 MHz
Passband Insertion Loss: 2.0 dB max.
Passband Ripple: 0.5 dB max.
Rejection: 70 dBc min at 2450 MHz
Power Handling: 3 Watt

Mechanical


Mounting Method: SMT
Dimensions: 32 x 17 x 7.5 mm

Environmental

Operating Temperature: -30°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

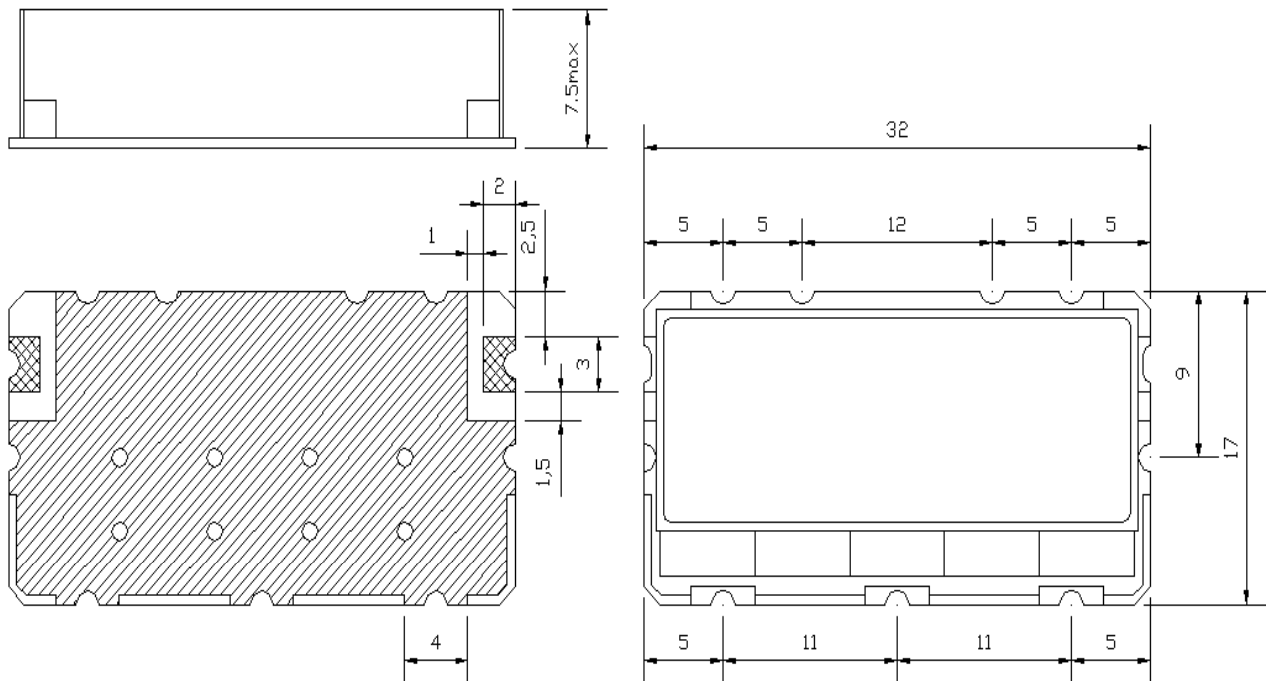

Unit:mm
Tolerance:±0,3