



Electrical specifications

Passband: 946-1000 MHz
Insertion loss: ≤ 4 dB
Rejection: 45 dB@925-940 MHz
Return loss: 18 dB


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N Female
Dimensions: 7.90" X 4.50" X 3.10" in

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

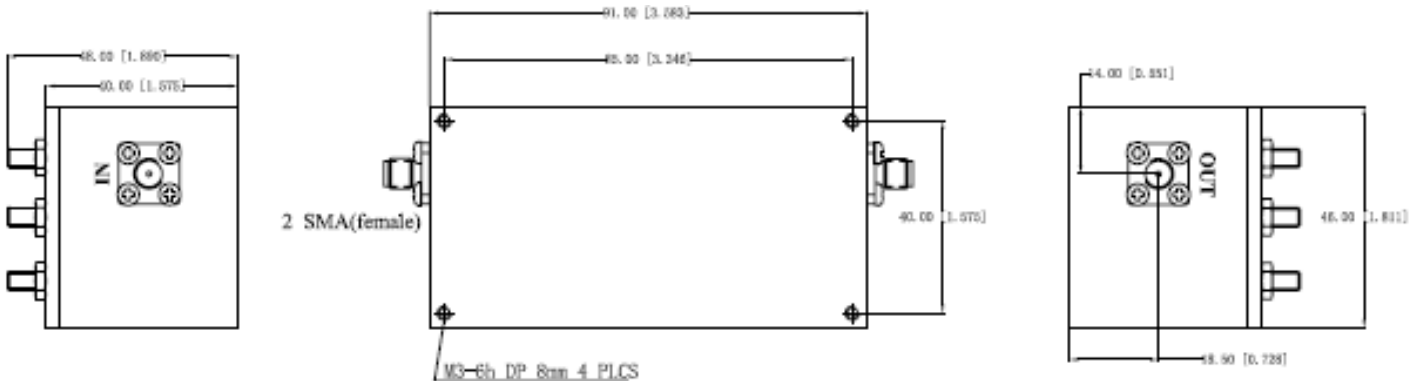



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

937 MHz Cavity Bandpass Filter

Part Number: AB937B482



Plot:

