


Power Triple Lock TE Internal #: 1-1971776-6 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

### View on TE.com >



#### Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK Plug, Standard Temperature

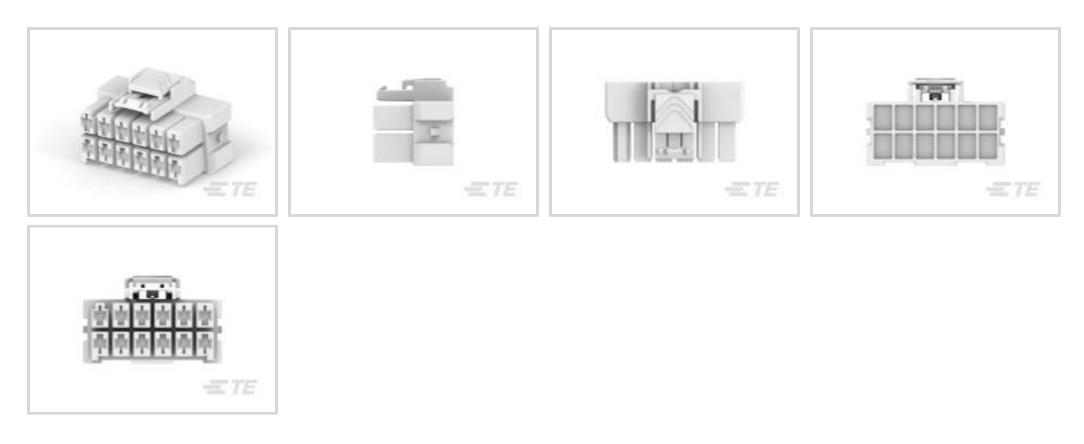

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 6 mm [.236 in ]

### All POWER TRIPLE LOCK Plug, Standard Temperature (48)

## Features

### **Product Type Features**

Rectangular Power Connector Type	Housing			
Connector & Housing Type	Plug			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	12			
Number of Power Positions	12			
Number of Rows	2			
Electrical Characteristics				
Operating Voltage	600 VDC			
Body Features				

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°	
Connector & Keying Code	A	
Contact Features		
Contact Layout	Matrix	
Contact Retention Within Housing	Without	
Contact Type	Receptacle	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Panel Mount Feature	Without	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	6 mm[.236 in]	
Housing Color	Natural	
Housing Material	PBT GF	
Dimensions		
Row-to-Row Spacing	8.1 mm[.319 in]	

# Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]			
Operation/Application				
Circuit Application	Power			
Identification Marking				
Circuit Identification Feature	With			
Industry Standards				
UL Rating	Recognized			
Agency/Standard	UL			
Approved Standards	UL E28476 UL 94V-0			
UL Flammability Rating				
Glow Wire Rating	Standard Part - Not Glow Wire			
Packaging Features				
Packaging Method	Carton			

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Soldar Process Capability	Not reviewed for colder process capability	

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock







# Also in the Series | Power Triple Lock

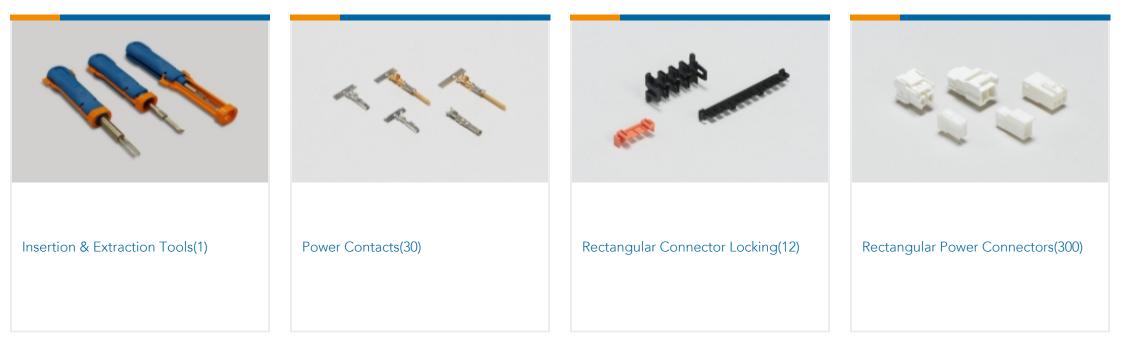

# Customers Also Bought

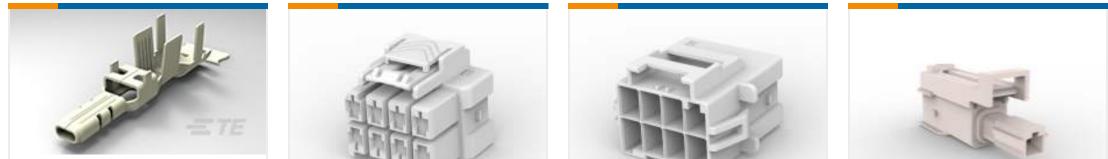

	ETE	ETE	= TE	
TE Part #1971784-1 PTL TAB CONTACT, 16-19 AWG, 2X22 AWG	TE Part #1-1971775-3 POWER TRIPLE LOCK Plug, Standard Temperature	TE Part #1-1971875-4 Standard Temperature Caps   POWER TRIPLE LOCK	TE Part #1-2345728-1 Power Versa-Lock PLUG, 1X1 KEY A	

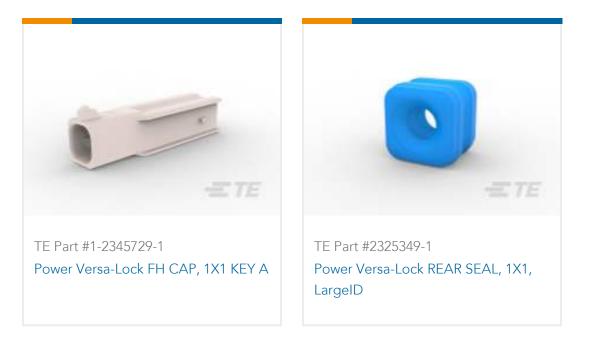

# Documents

### CAD Files

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-1971776-6\_E.2d\_dxf.zip

English

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



**Customer View Model** 

ENG\_CVM\_CVM\_1-1971776-6\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1971776-6\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

**Product Specifications** 

Application Specification

English

Product Environmental Compliance TE Material Declaration

English