
| Ī | PROPRIETARY INFORMATION:   |     |               |
|---|--|-----|---------------|
|   | PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING. IN WHOLE OR IN PART. IS HEREBY | REV |               |
|   | PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK.INC.  | A   | IN            |
|   | TROTHERIES EXCELLING STECHTED IN WRITING BY GEODIER, INC.  | n   | LIDD ATE TO M |

| REVISION |                                      |          |          |  |  |
|----------|--------------------------------------|----------|----------|--|--|
| REV      | DESCRIPTION                          | DATE     | APPROVED |  |  |
| A        | INITIAL RELEASE                      | 05/10/00 | PS       |  |  |
| В        | UPDATE TO NEW FORMAT, RFS. 7874, DMR | 02/03/06 | BS       |  |  |

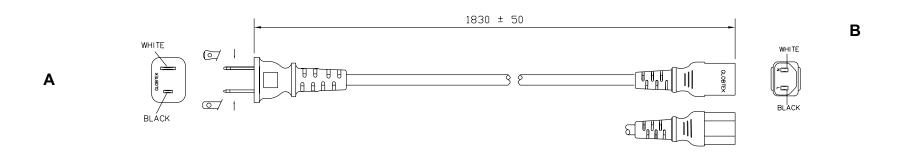

## **GENERAL SPECIFICATIONS:**

RATING: 10A / 125V AC CABLE TYPE / SIZE: SJT, 18 AWG X 3C TEMPERATURE RATING: 105° C MIN.

TEMPERATURE RATING: 105° C MIN. CONDUCTOR COLORS: BLACK / WHITE

CABLE JACKET COLOR: BLACK


OVERALL LENGTH (L):  $1830 \pm 50 \text{ mm}$ CABLE OUTER DIAMETER:  $7.8 \pm 0.1 \text{ mm}$ 

END 'A' TERMINATION: NEMA 1-15P POLARIZED

END 'B' TERMINATION: IEC 60320 / C17
APPROVALS PLUG: UL, CSA OR cUL
APPROVALS CABLE: UL, CSA OR cUL
APPROVALS CONNECTOR: UL, CSA OR cUL

## PACKING:

HANKING



## NOTES:

 CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

