

5



4

3



2

1

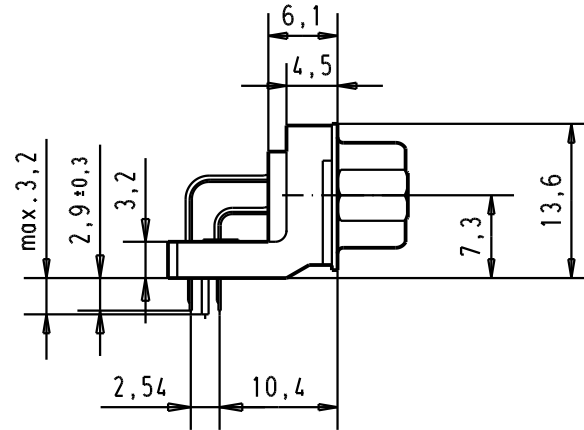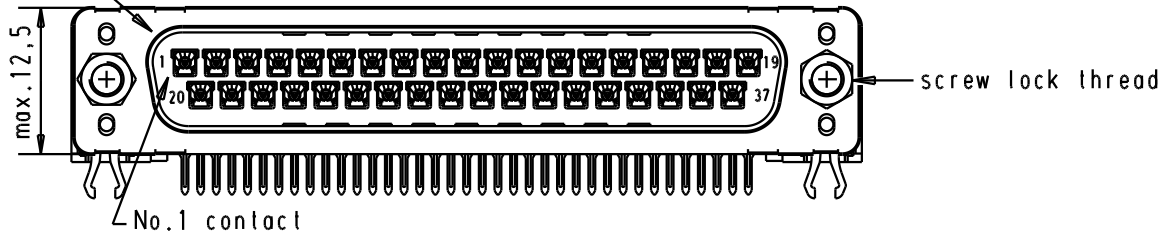

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

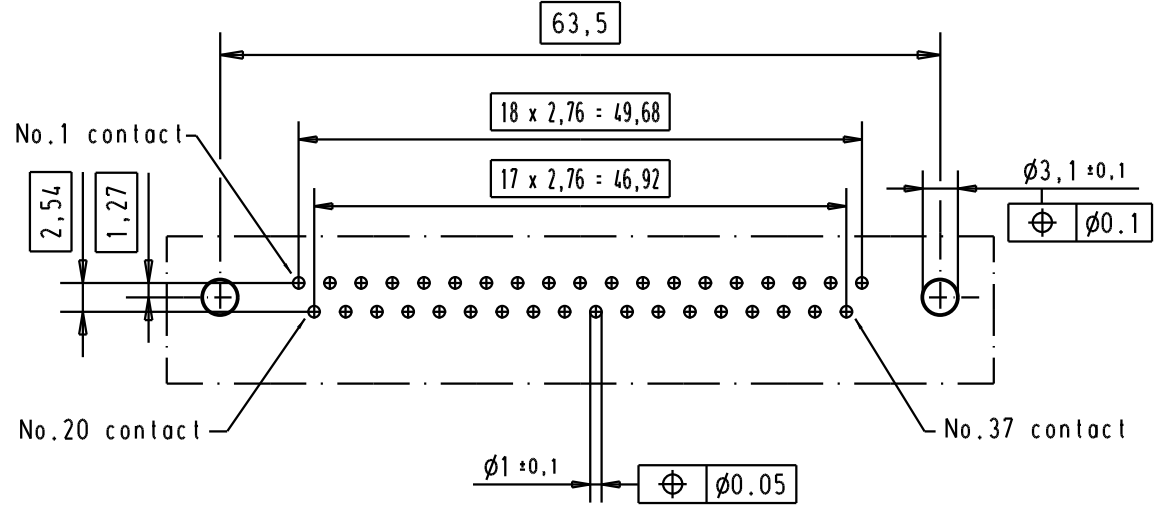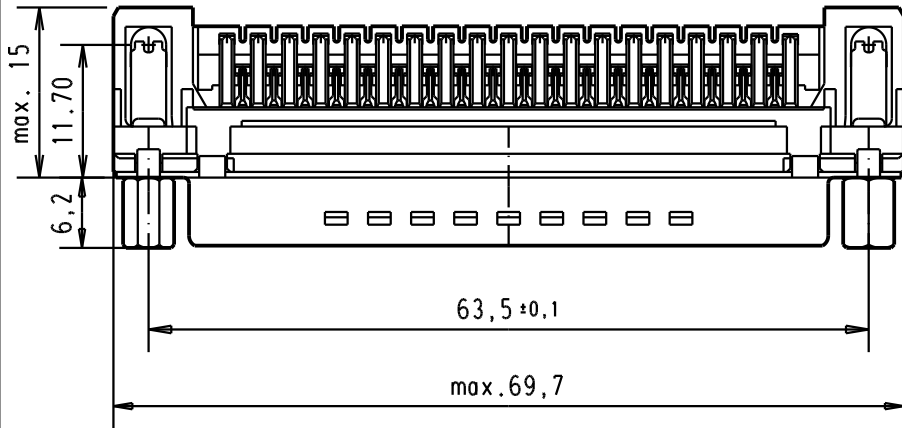

PCB layout hole component side



Connector retention and insertion forces on the PCB = 25 / 80 newtons

A	09 65 462 3833	M3	1							 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, standard angle, 37 poles, with solder pin, screw lock, grounding board lock	Maßstab/ Scale 1.5:1
	09 65 462 6833	M3	2									
	09 65 462 7833	M3	3									
	09 65 462 3813	4-40 UNC	1									
	09 65 462 6813	4-40 UNC	2	31892	22/04/04	JH	HARTING EURL F-95972 Paris		TB 0965462x8x3	Blatt/ Page 1 /		
	09 65 462 7813	4-40 UNC	3	31084	04/SEP/02	YT						
	Part number	Screw lock thread	Performance level	Mod.	Dat.	Name				Sub.		