

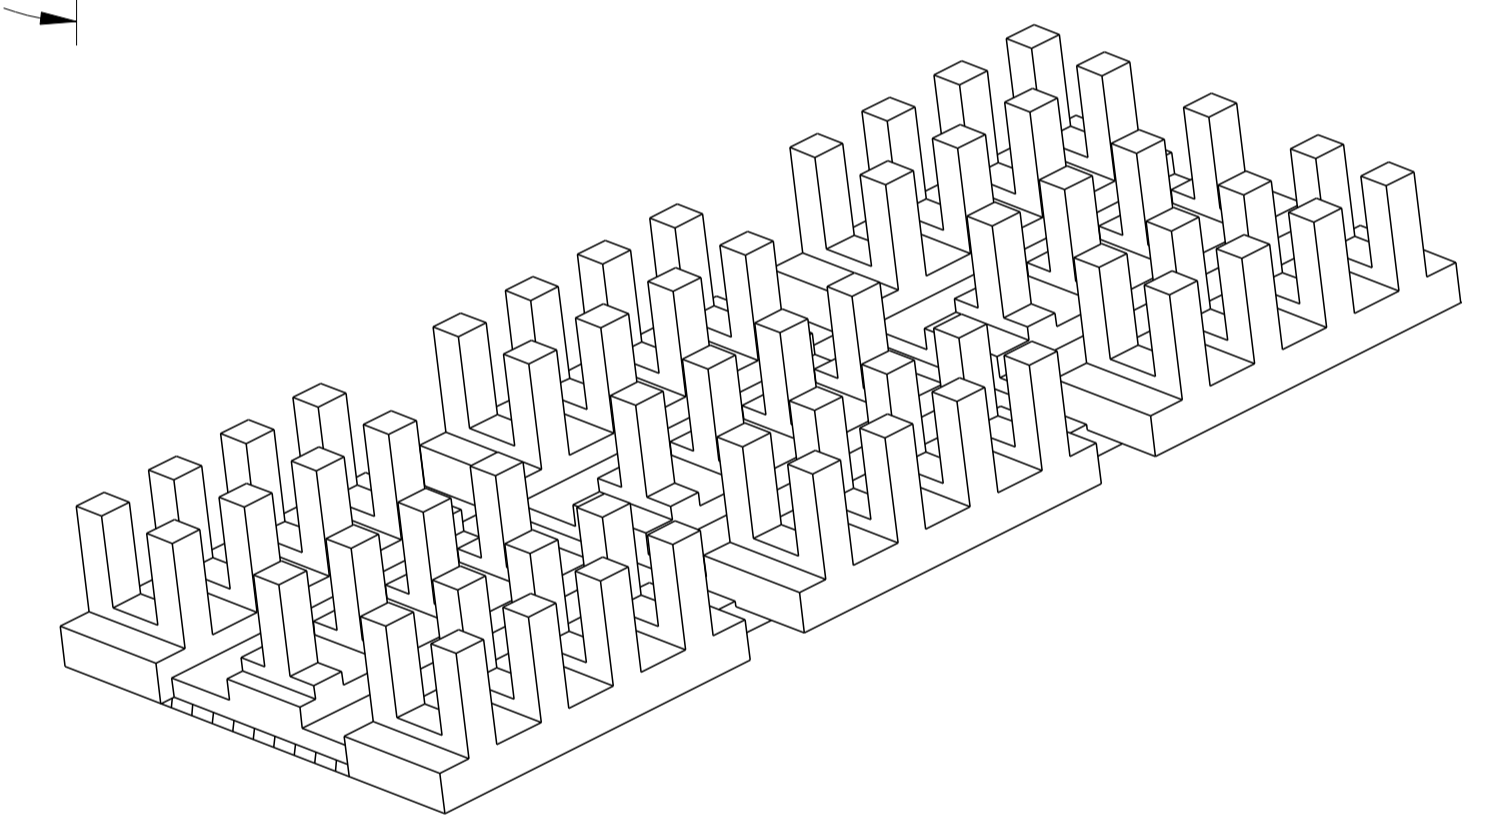
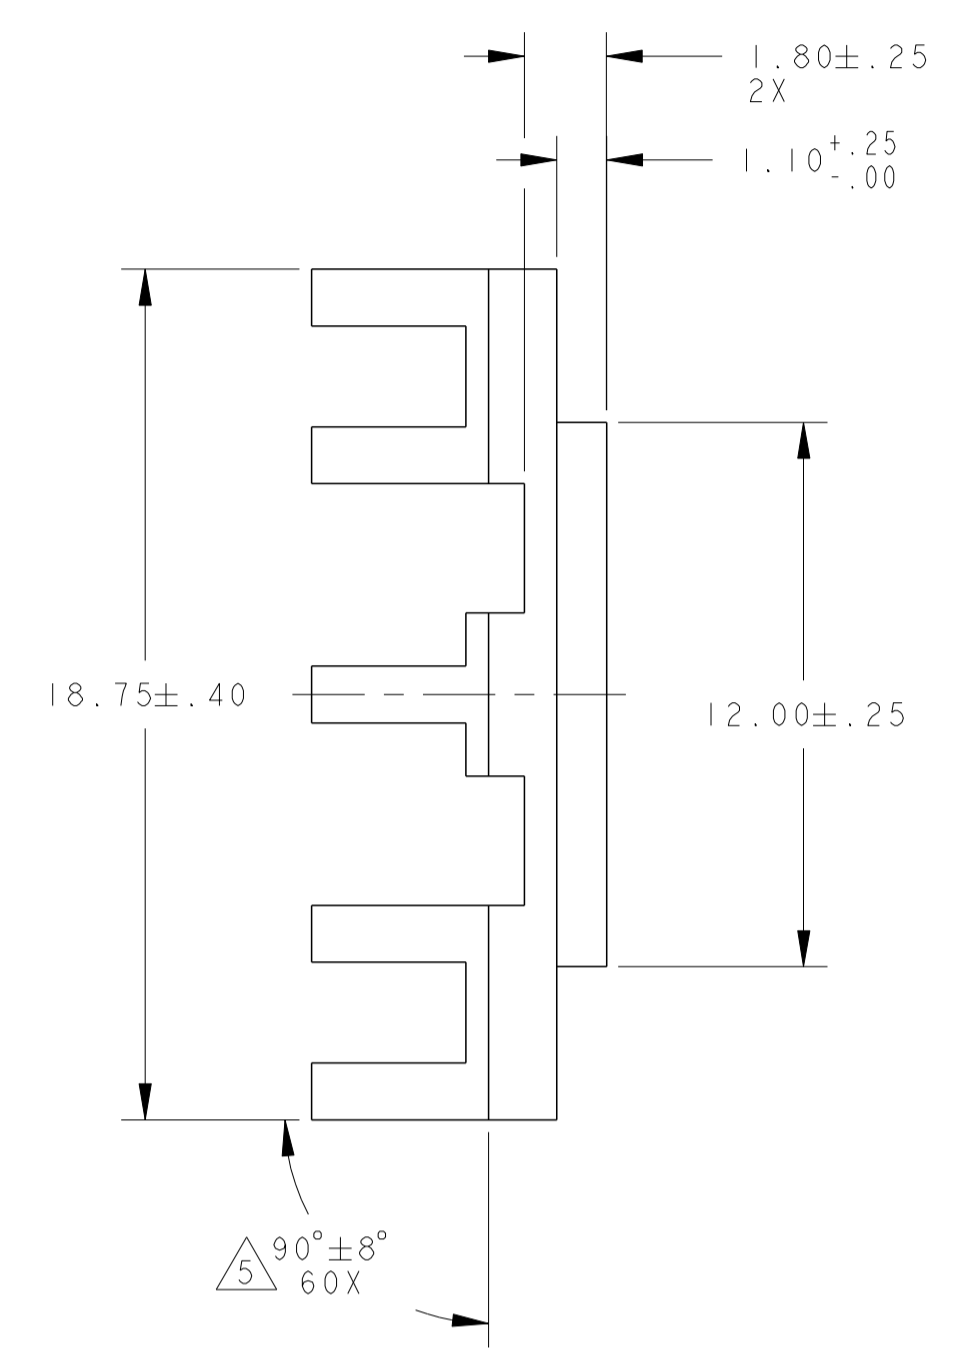


| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-------------|-----------|-----------|------|--|--|
| P | LTR | DESCRIPTION | DATE | DWN | APVD | | |
| 1 | | PRELIMINARY | 25JUN2011 | AL | CW | | |

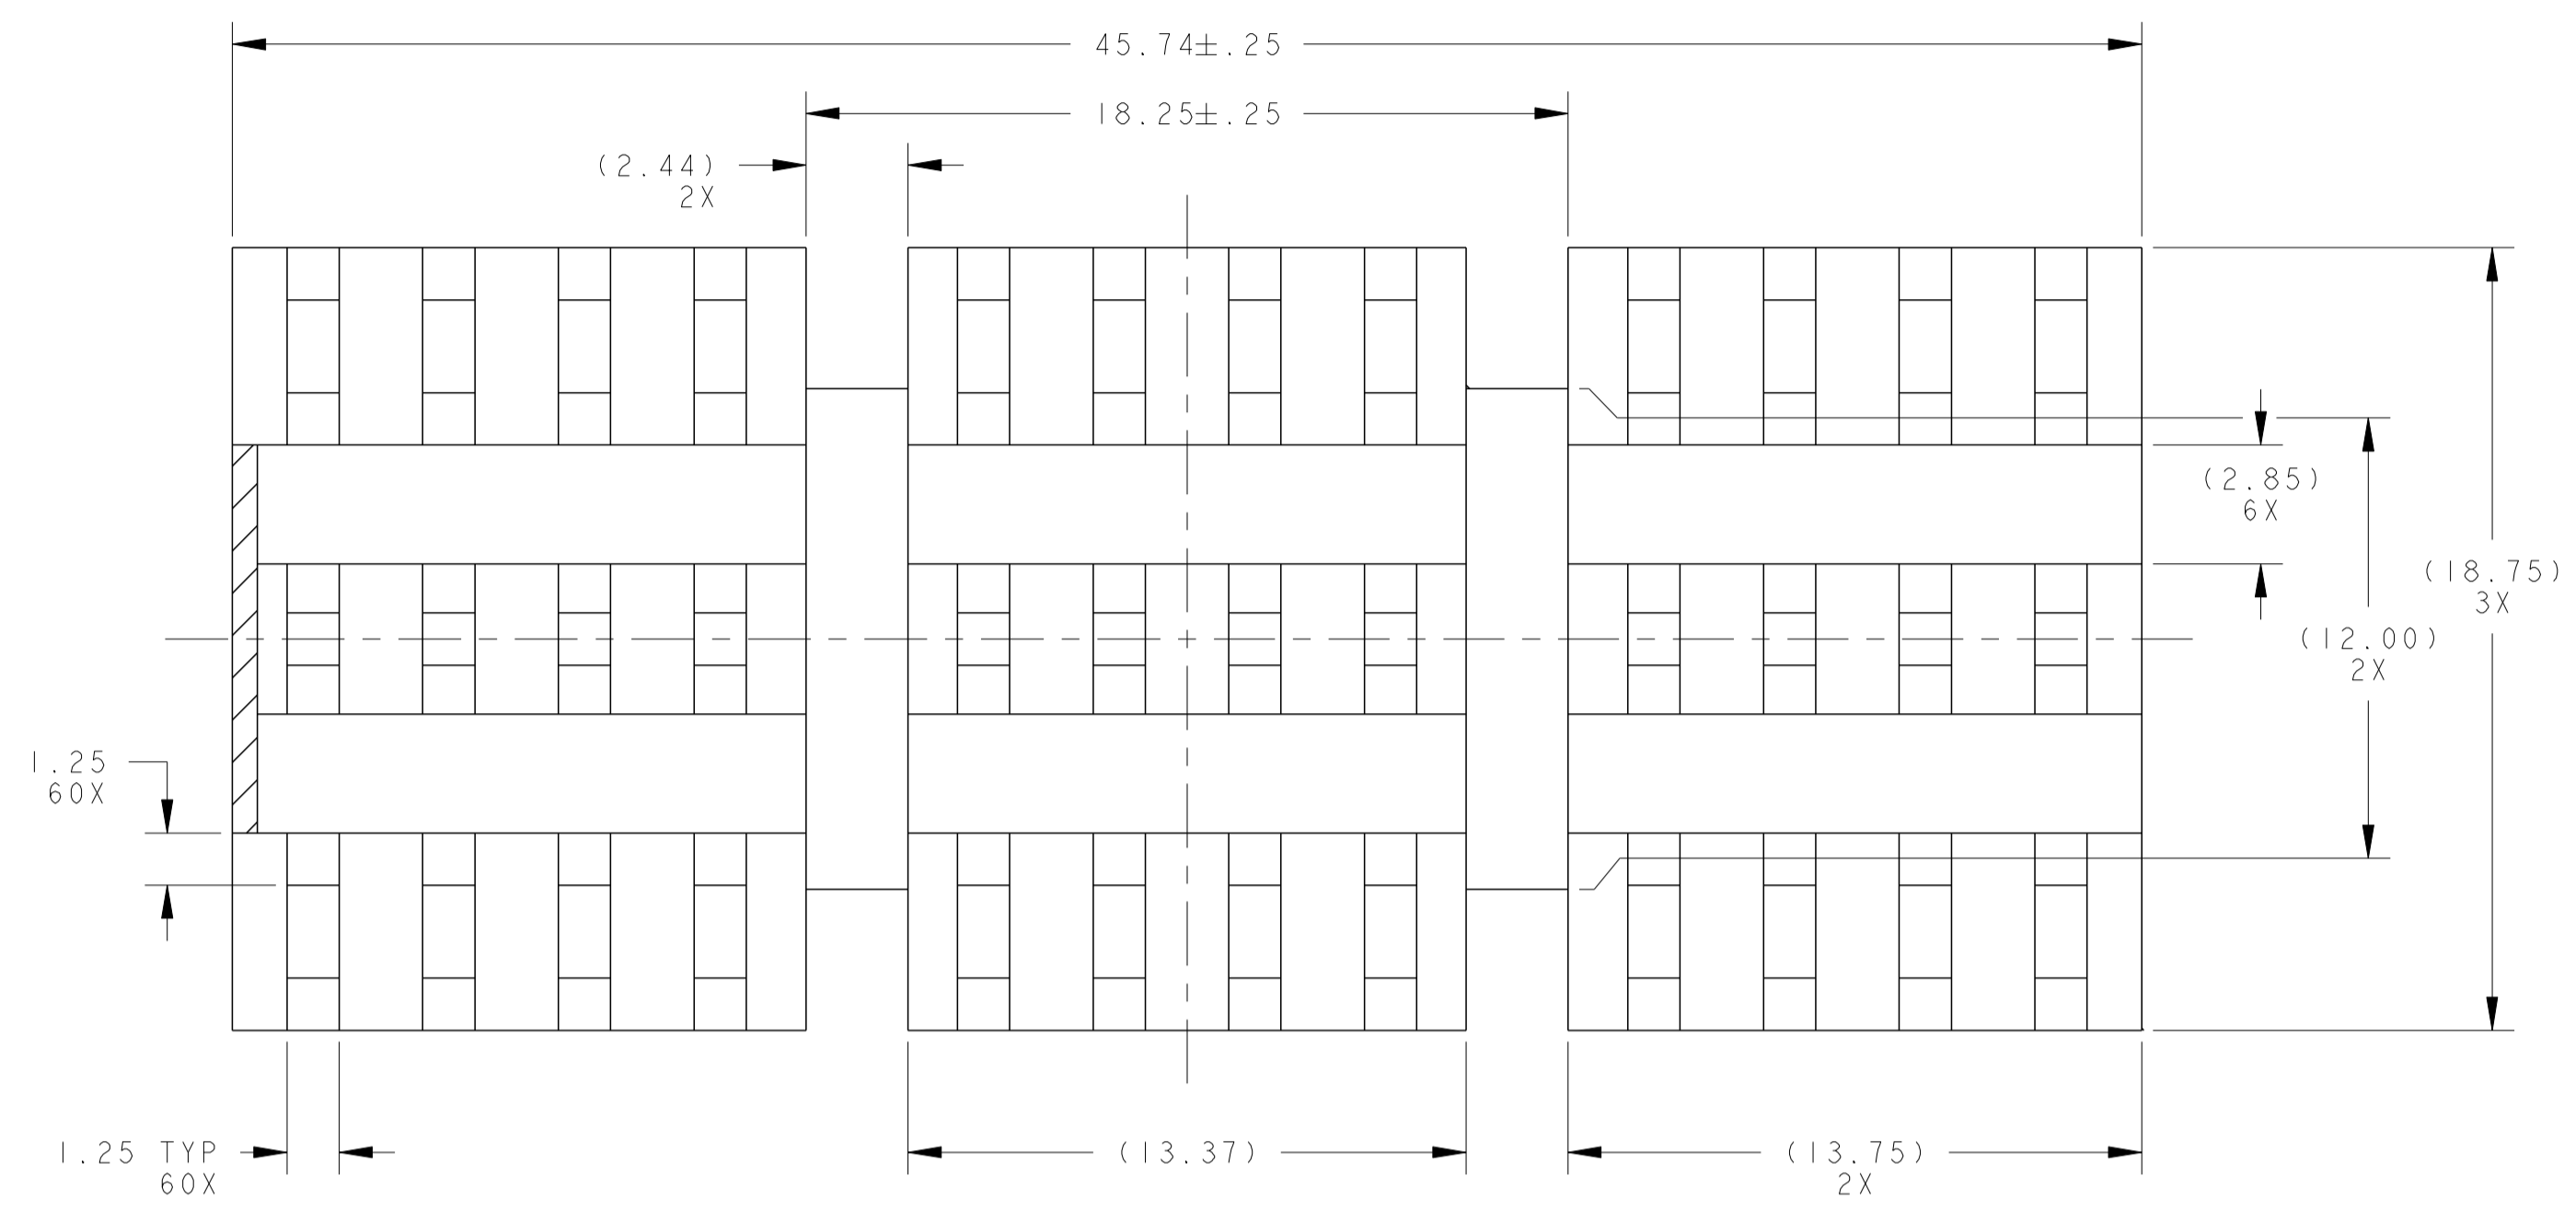

SCALE 4.000

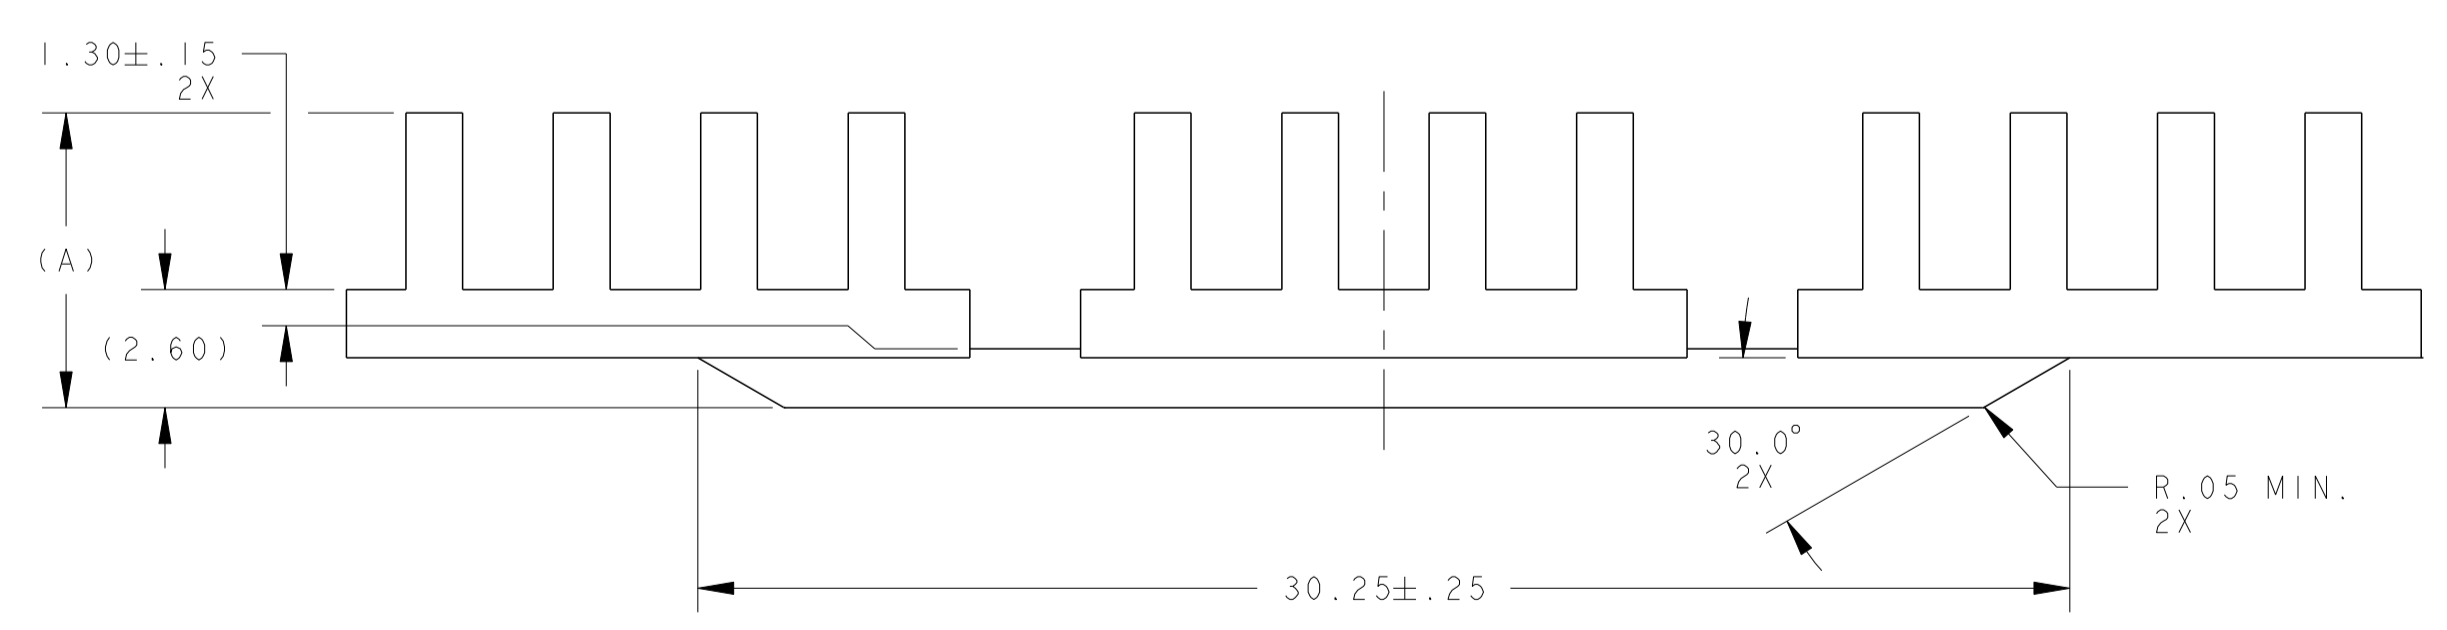

- NOTES:
 UNLESS OTHERWISE SPECIFIED
- 1 MATERIAL: 6063 ALUMINUM.
 - 2 FINISH: ELECTROLESS NICKEL, 0.76-2.54 MICROMETERS THICK
 - 3. 0,2mm MAX BURR.
 - 4. VARIATION IN PLATING COLOR IS NORMAL AND ALLOWED.
 - 5 MAXIMUM PIN LEAN OF 8° IN ANY DIRECTION.
 - 6. RoHS COMPLIANT AND CERTIFIED.

| | | |
|--------|------|-------------|
| 2 | 13.5 | 2170110-3 |
| 2 | 6.5 | 2170110-2 |
| 2 | 4.2 | 2170110-1 |
| FINISH | A | PART NUMBER |

| | | | | |
|--|-----------------|-------------------|--------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN AL 25JUN2011 | STE TE Connectivity | |
| DIMENSIONS: mm | | CHK DZ 25JUN2011 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD CW 25JUN2011 | NAME QFSP DOUBLE HEATSINK | |
| 0 PLC ±.25 | 1 PLC ±.13 | PRODUCT SPEC | SIZE CAGE CODE DRAWING NO | |
| 2 PLC ±.051 | 3 PLC ±.0001 | APPLICATION SPEC | RESTRICTED TO | |
| 4 PLC ±.0001 | ANGLES ±1° | WEIGHT | A100779C=2170110 | |
| MATERIAL SEE NOTE | FINISH SEE NOTE | CUSTOMER DRAWING | SCALE 6.000 SHEET 1 OF 1 REV 1 | |