

**PLUGSERIES  
POS 24VDC/230VAC 4A**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-2083

www.weidmueller.com

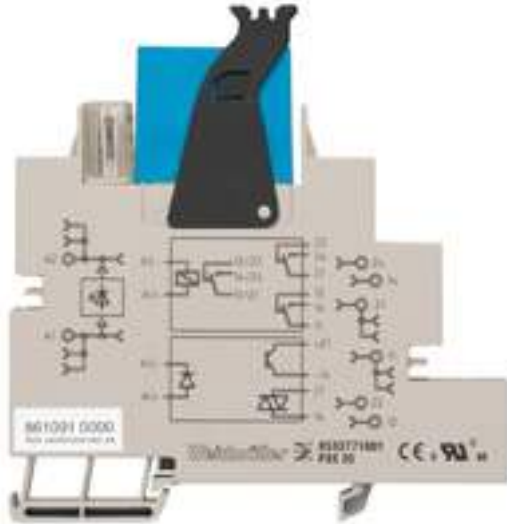

The modular kit-type system represents a new generation of plug-in optos.

At the heart is an innovative PXS or PXZ relay base. The PLUGSERIES is particularly service-friendly and the ideal link between SSR and the application.

Conventional SSR and LED indicators are simply plugged in, retaining and disassembly clips provide a secure fixing.

Pre-assembled SSR couplers round off the product range.

Plug-in ZQV 2.5 cross-connectors

enable multiplexers to be set up quickly thanks to simple side-by-side mounting.

**General ordering data**

Order No.	<a href="#">8610910000</a>
Part designation	POS 24VDC/230VAC 4A
Version	PLUGSERIES, Solid-state relay, 12...275 V AC, 4 A
GTIN (EAN)	4032248271719
Qty.	10 pc(s).

## PLUGSERIES POS 24VDC/230VAC 4A

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

## Technical data

### Dimensions

Length	92 mm	Width	15.3 mm
Height	95 mm	Weight	18 g

### Temperature

Storage temperature	-40 °C...+50 °C
---------------------	-----------------

### Approvals

Approvals institutes	GOSTME25; CE; CURUS
----------------------	---------------------

### Control side

Power rating	250 mW	Rated auxiliary voltage	No
Rated control voltage	15 V DC...30 V DC	Status display on control side	Green LED

### General data

Standards	EN 50178	Humidity	40°C / 93% rel. humidity, no condensation
Solid-state type	POWER MOS-FET		

### Insulation coordination (EN 50 178)

Clearance and creepage distances for control/load side	> 8 mm	Overvoltage category	III
Pollution severity	2	Rated impulse withstand voltage	4 kV <sub>eff</sub>
Rated voltage	300 V		

### Load side

Protective circuit, load side	RC element	Rated auxiliary voltage	No
Rated switching current	4 A	Rated switching voltage	12...275 V AC
Short-circuit-proof	No	Status indicator load side	Green LED
Switch-off delay	20 ms	Switch-on delay	≤ 12 ms
Voltage drop at max. load	≤ 1.1 V		

### Classifications

eClass 6.0	27-27-09-90
------------	-------------

**PLUGSERIES**  
**POS 24VDC/230VAC 4A**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

**Drawings**

**Electric symbol**

