


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

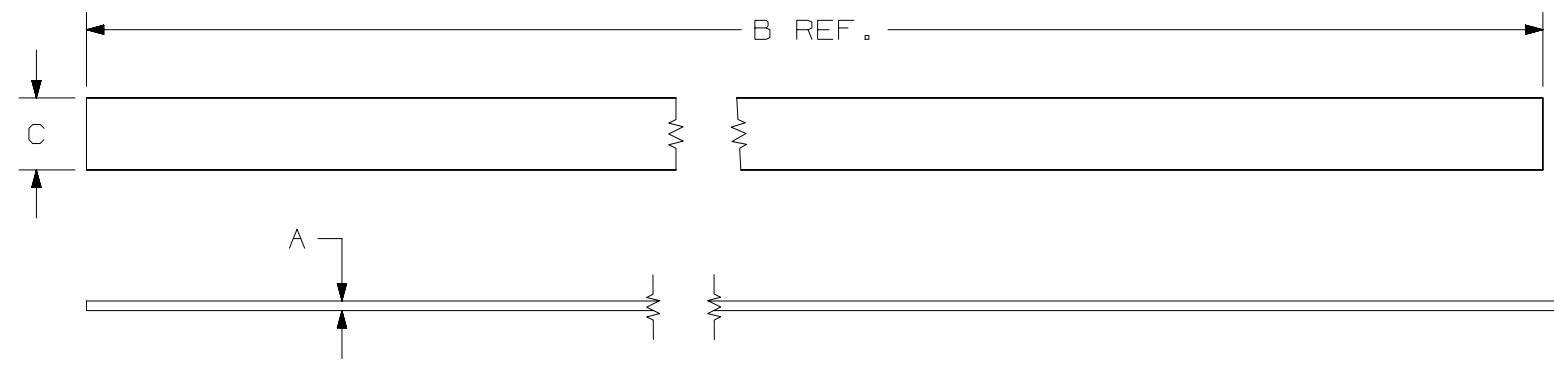

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	MIN. LOOP* TENSILE lbs. (N)	ROLL DESCRIPTION
	MIN. in (mm)	MAX. in (mm)					
HLS1.5S	.25 (6.4)	1.5 (38.1)	.100 (2.5) MAX.	6.0 (152)	.750 (19.1)	50 (222)	PERFORATED STRIPS QTY: 10 PIECES/ROLL
HLS3S		3.2 (81.3)		12.0 (305)			
HLS5S		5.0 (127)		18.0 (457)			
HLS-15R		VARIOUS		180 (4572)			
HLS-75R		VARIOUS		900 (22860)			

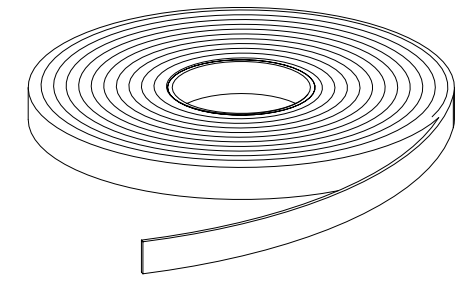



ILLUSTRATION 'A'

NOTES:

- 1) ALL LENGTHS PACKED IN ROLL FORM (SEE ILLUSTRATION 'A')
- * 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.
- 3) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR OPTIONAL COLORS.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE TAK-TY HOOK & LOOP CABLE TIES HLS SERIES CUSTOMER DRAWING					
							ITEM REVISION NAME SS-27184/AD				PANDUIT	
							DATASET FILE NAME SS-27184_06/A					
07	9/15/20	JSP	DWW	ML	C. ADDED MAX TO DIM. A.	SS-27184	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± .125 .xxx ± .04 .xx ± .125 ANGLES ± 1°  THIRD ANGLE PROJECTION				MATERIAL: BACK-TO-BACK HOOK & LOOP HOOKS: POLYETHYLENE OR NYLON LOOPS: NYLON	
06	01-14-19	SAT	DWW	ML	B. UPDATED MATERIAL. A. REMOVED APPROXIMATE WEIGHT COLUMN.	SS-27184						
5	8/27/14	RVU	DJW	KLN	ADDED 1 SPLICE MAX FOR HLS-15R. ADDED 2 SPLICE MAX FOR HLS-75R.	SS-27184						
4	6/5/06	FAB			ADDED PART WEIGHT TO DRAWING.	SS-27184						
							DRAWING NUMBER: SS-27184					
							DRAWN BY KET	DATE 12/30/98	CHK HVP	SCALE NONE	SHT 1 OF 1	SIZE A