



ALPHA & OMEGA
SEMICONDUCTOR

AOC2415

20V P-Channel MOSFET

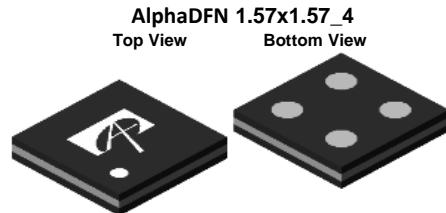
General Description

The AOC2415 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 1.5V while retaining a 8V $V_{GS(MAX)}$ rating.

Product Summary



V_{DS}	-20V
I_D (at $V_{GS}=-4.5V$)	-3.5A
$R_{DS(ON)}$ (at $V_{GS}=-4.5V$)	< 33mΩ
$R_{DS(ON)}$ (at $V_{GS}=-2.5V$)	< 38mΩ
$R_{DS(ON)}$ (at $V_{GS}=-1.8V$)	< 45mΩ
$R_{DS(ON)}$ (at $V_{GS}=-1.5V$)	< 54mΩ

Typical ESD protection HBM Class 3A



Top View

Bottom View



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 8	V
Source Current (DC) ^{Note1}	I_D	-3.5	A
Source Current (Pulse) ^{Note2}	I_{DM}	-50	
Power Dissipation ^{Note1}	P_D	0.55	W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A $t \leq 10s$	$R_{θJA}$	140	170	°C/W
Maximum Junction-to-Ambient ^{A,D} Steady-State		190	230	°C/W

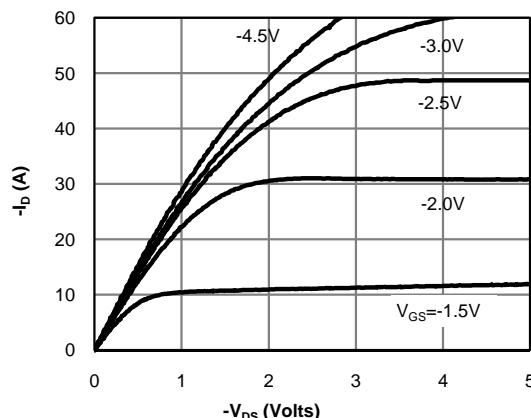
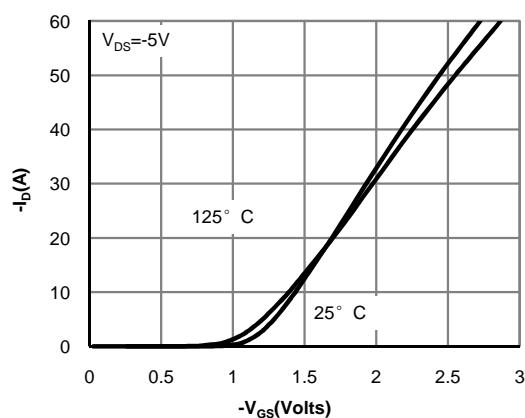
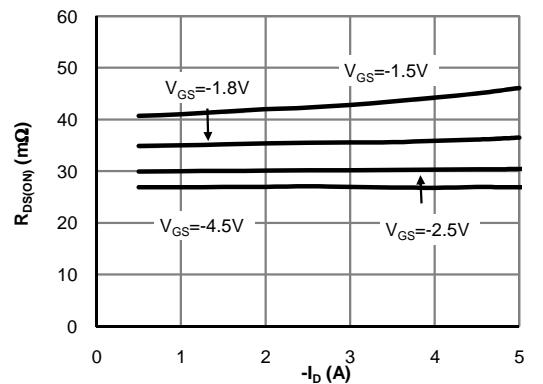
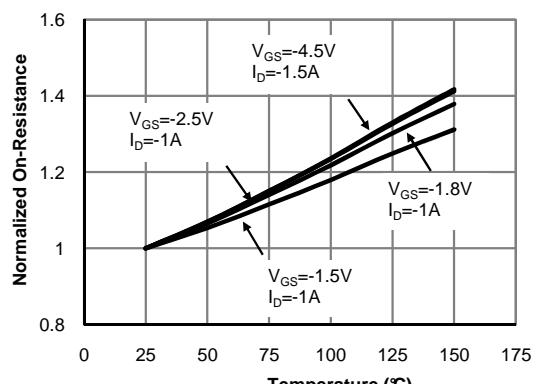
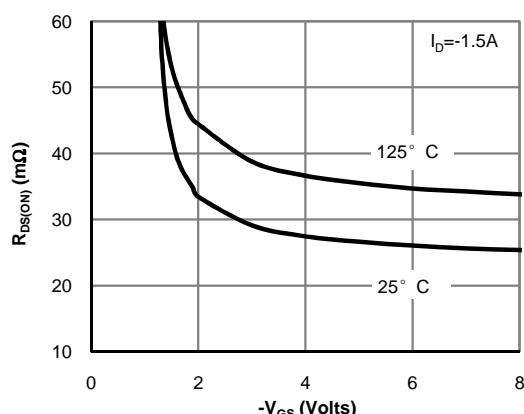
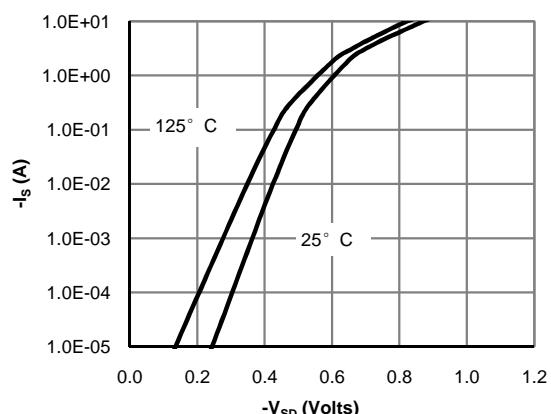
Note 1. Mounted on minimum pad PCB

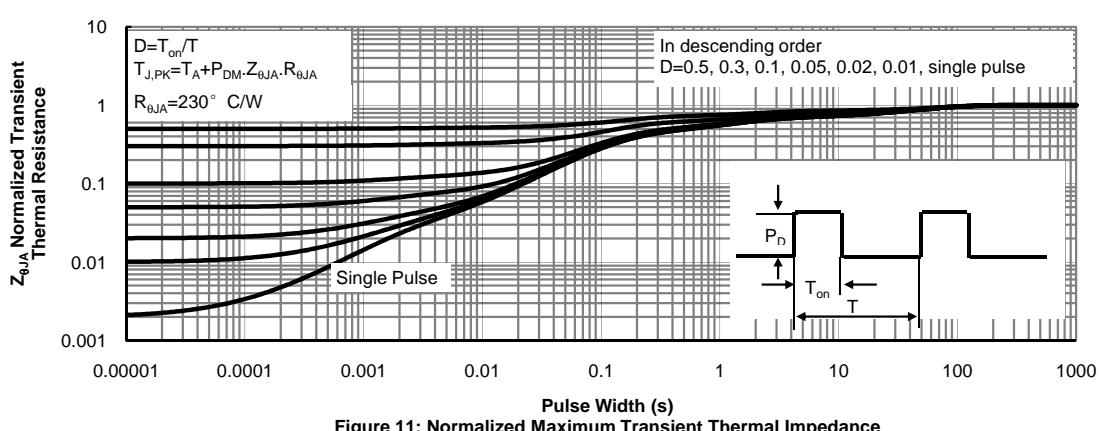
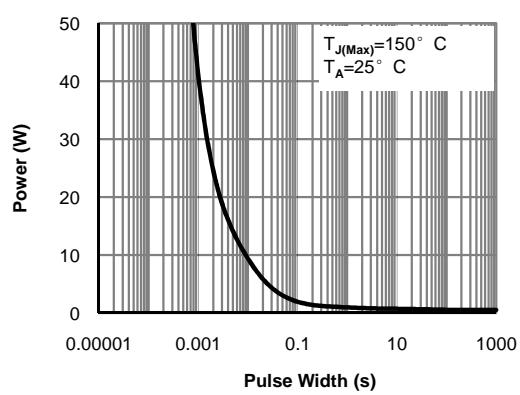
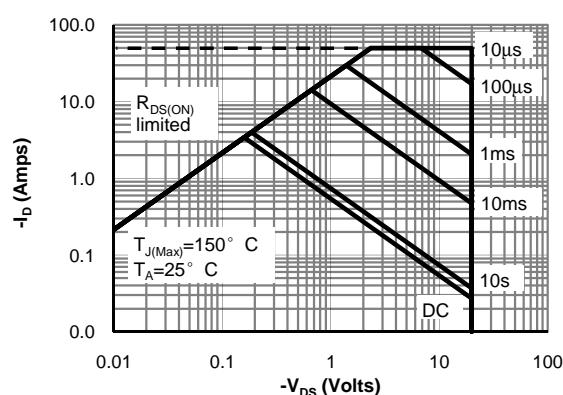
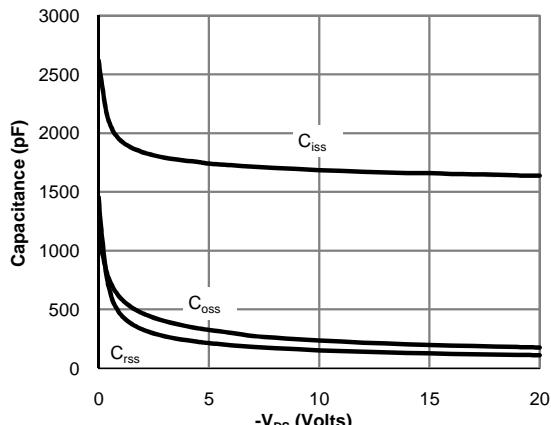
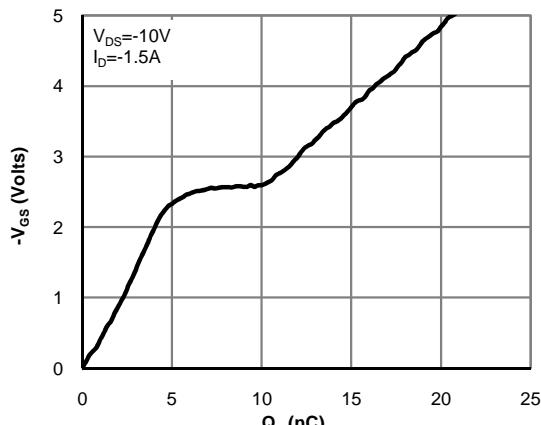
Note 2. PW <300 μs pulses, duty cycle 0.5% max

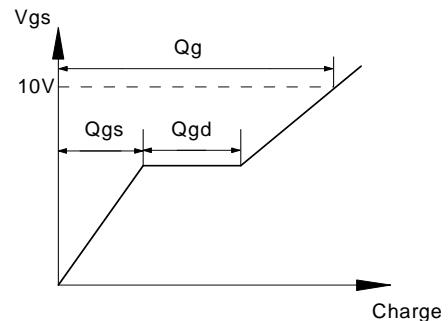
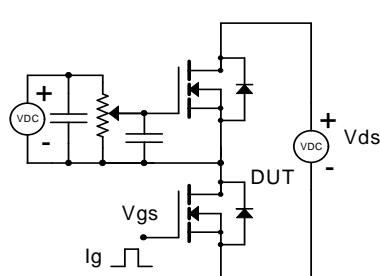
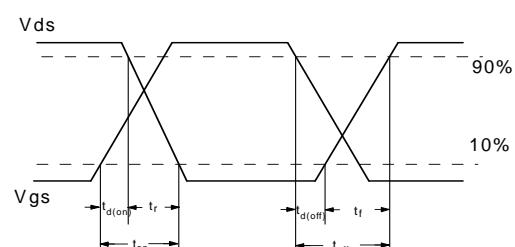
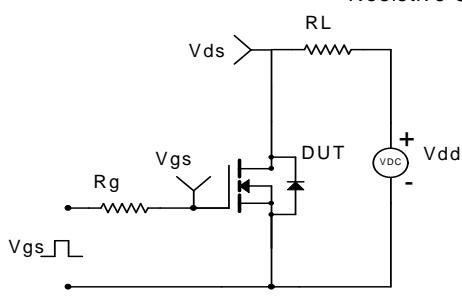
Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=-250\mu\text{A}, V_{GS}=0\text{V}$	-20			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-20\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			-1 -5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 8\text{V}$			± 10	μA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-0.3	-0.65	-1.0	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=-4.5\text{V}, I_D=-1.5\text{A}$ $T_J=125^\circ\text{C}$	27	33		$\text{m}\Omega$
		$V_{GS}=-2.5\text{V}, I_D=-1\text{A}$	36	44		$\text{m}\Omega$
		$V_{GS}=-1.8\text{V}, I_D=-1\text{A}$	30	38		$\text{m}\Omega$
		$V_{GS}=-1.5\text{V}, I_D=-1\text{A}$	35	45		$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=-5\text{V}, I_D=-1.5\text{A}$		14		S
V_{SD}	Diode Forward Voltage	$I_S=-1\text{A}, V_{GS}=0\text{V}$		-0.6	-1	V
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=-10\text{V}, f=1\text{MHz}$		1685		pF
C_{oss}	Output Capacitance			235		pF
C_{rss}	Reverse Transfer Capacitance			150		pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$		1.3		$\text{k}\Omega$
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=-4.5\text{V}, V_{DS}=-10\text{V}, I_D=-1.5\text{A}$		19	28	nC
Q_{gs}	Gate Source Charge			5		nC
Q_{gd}	Gate Drain Charge			5.5		nC
$t_{\text{D(on)}}$	Turn-On Delay Time	$V_{GS}=-4.5\text{V}, V_{DS}=-10\text{V}, R_L=6.67\Omega, R_{\text{GEN}}=3\Omega$		0.65		μs
t_r	Turn-On Rise Time			1.1		μs
$t_{\text{D(off)}}$	Turn-Off Delay Time			4		μs
t_f	Turn-Off Fall Time			3.8		μs
t_{rr}	Body Diode Reverse Recovery Time	$I_F=-1.5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		16		ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=-1.5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		9		nC

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Fig 1: On-Region Characteristics

Figure 2: Transfer Characteristics

Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

Figure 4: On-Resistance vs. Junction Temperature (Note E)

Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Gate Charge Test Circuit & Waveform

Resistive Switching Test Circuit & Waveforms

Diode Recovery Test Circuit & Waveforms
