




INTERVOX Speakers from International C

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

1.	MODEL:	S160RS-M-1W			
2.	Dimension	Outer Diameter	40 mm.	Baffle Opening	35.8 mm.
		Height	Refer to Drawing	Weight	9.2 Grams.
3.	Magnet	Materials	Rare Earth	Size	∅ 12.5X 1.5 mm.
4.	Nominal Impedance	8 Ω	± 15 %	At	1000 Hz.
5.	Power Rating	Normal	1000 mW.	Maximum	1500 mW.
6.	Lowest Resonant Frequency	430	± 20 %		Hz.
7.	Output Sound Pressure Level (S.P.L.)	84 ± 3 db / 1.0 Watt · 0.5 Meter.			
		Average at	800,	1000,	1200,
8.	Frequency Range	200 ~ 5000 Hz.	Average SPL - 10 db.		
9.	Distortion	5 %	Maximum At	1000 Hz.	1000 mW.
10.	Abnormal Sound Test	Must be Normal Tested By 2.9 Volts. Sine Wave.			
11.	Load Test	White Noise with Weighted Filter 2.9 Volts.(RMS) 24 Hrs.			
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			

MOUNTING NOTICE

AT LEAST
0.8mm
FOR
DIAPHRAGM
MOVING

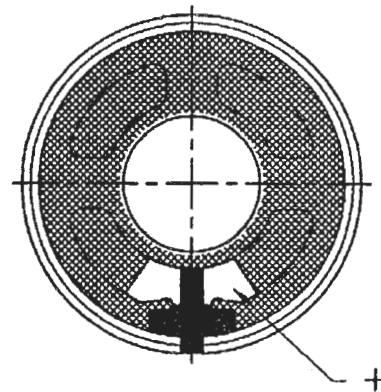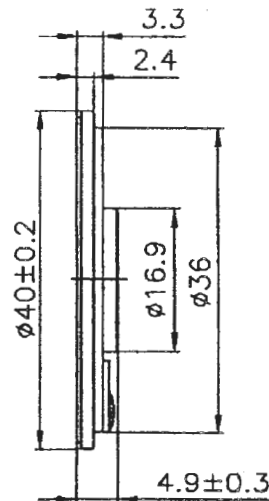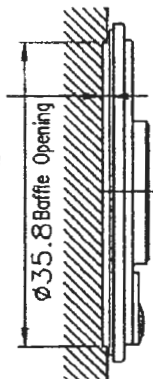

450

Unit : mm

Housing Material : METAL

INTERVOX Speakers from International ©

S160RS-M-1W

450


VOL:2.828V 1W) DIS:0.5M

X:1.0000kHz

*Y:85.31dB

ZA:Live Curve

SSR Fund.

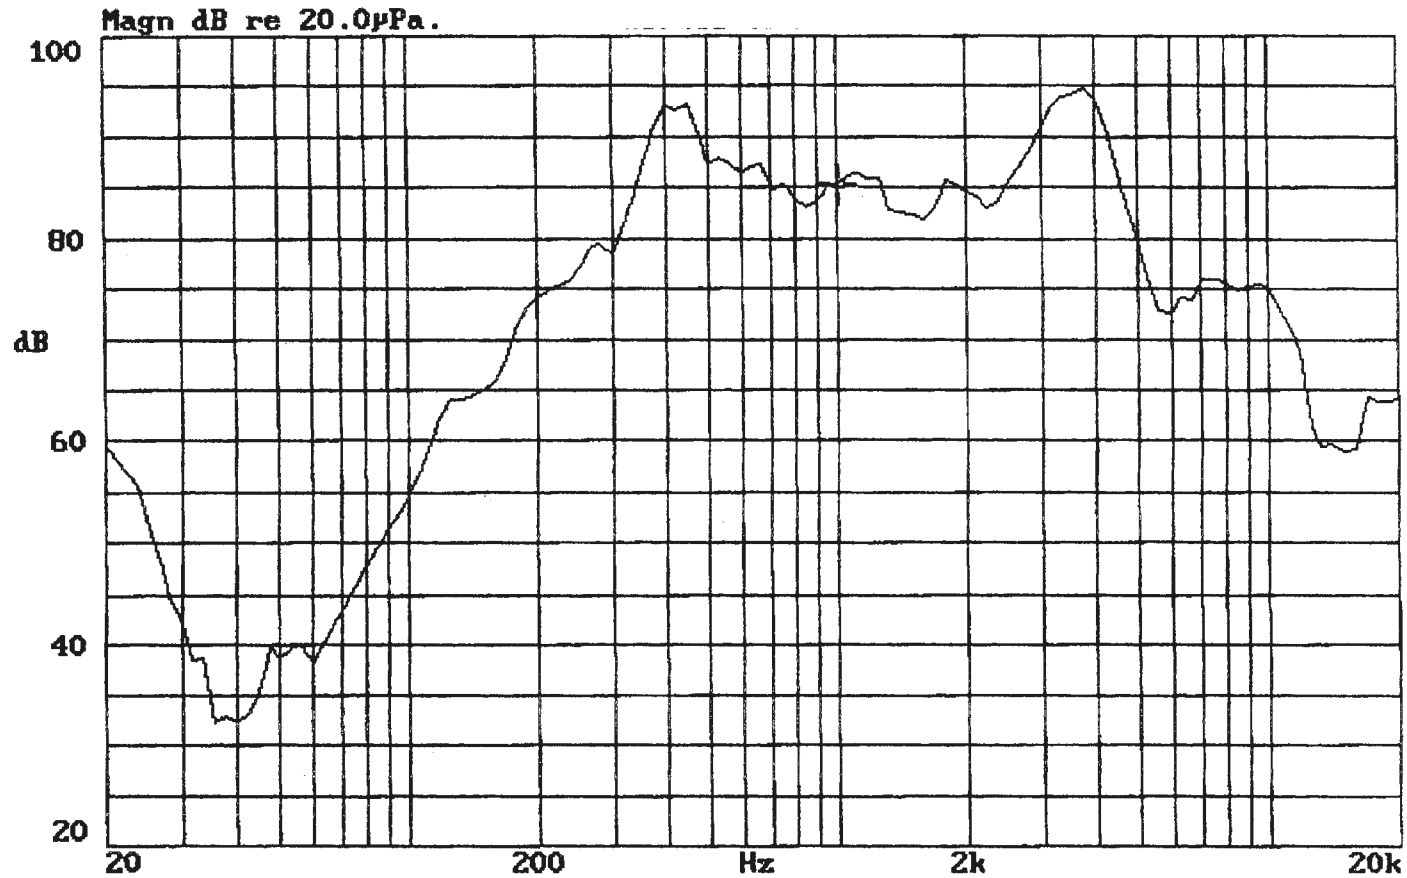

15-DEC-2000 14:38:12

Mode: SPEAKER

