


G3VM-□[A]/□[D]/□[B]/□[E]

MOS FET Relays DIP, General-purpose Type

General-purpose MOS FET Relays in DIP packages for a wide range of applications

- Package: DIP 4-pin or DIP 6-pin
- Contact form: 1a (SPST-NO) or 1b (SPST-NC)
- Load voltage: 60 V, 350 V, or 400 V

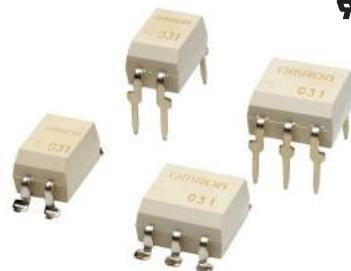

Note: The actual product is marked differently from the image shown here.


RoHS Compliant

Application Examples

- | | | |
|--------------------------------|------------------------|-----------------|
| • Communication equipment | • Security equipment | • Power circuit |
| • Test & Measurement equipment | • Industrial equipment | |

■ Package

(Unit : mm, Average)

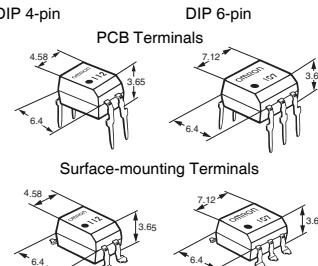

Note: The actual product is marked differently from the image shown here.

■ Model Number Legend

G3VM-□□□□

1. Load Voltage

6 : 60 V
35 : 350 V
40 : 400 V

3. Package

A : DIP 4-pin with PCB terminals
B : DIP 6-pin with PCB terminals
D : DIP 4-pin with surface-mounting terminals
E : DIP 6-pin with surface-mounting terminals

2. Contact form

1 : 1a (SPST-NO)
3 : 1b (SPST-NC)

4. Other informations

When specifications overlap, serial code is added recorded order.

■ Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
				Model	Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals	PCB Terminals	Surface-mounting Terminals
DIP	1a (SPST-NO)	60 V	500 mA	G3VM-61A1	G3VM-61D1	100 pcs.	G3VM-61D1(TR)
		350 V	120 mA	G3VM-351A	G3VM-351D		G3VM-351D(TR)
	1b (SPST-NC)		150 mA	G3VM-353A	G3VM-353D		G3VM-353D(TR)
	400 V	120 mA	G3VM-401A	G3VM-401D	G3VM-401D(TR)		

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
				Model	Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals	PCB Terminals	Surface-mounting Terminals
DIP6	1a (SPST-NO)	60 V	500 mA	G3VM-61B1	G3VM-61E1	50 pcs.	G3VM-61E1(TR)
		350 V	120 mA	G3VM-351B	G3VM-351E		G3VM-351E(TR)
	1b (SPST-NC)		150 mA	G3VM-353B	G3VM-353E		G3VM-353E(TR)
	400 V	120 mA	G3VM-401B	G3VM-401E	G3VM-401E(TR)		

* The AC peak and DC value are given for the load voltage and continuous load current.


Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" to the end of the model number.

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-61A1 G3VM-61D1	G3VM-61B1 G3VM-61E1	G3VM-351A G3VM-351D	G3VM-351B G3VM-351E	G3VM-353A G3VM-353D	G3VM-353B G3VM-353E	G3VM-401A G3VM-401D	G3VM-401B G3VM-401E	Unit	Measurement conditions
Input	LED forward current	IF				50				mA	
	Repetitive peak LED forward current	IFP				1				A	100 μs pulses, 100 pps
	LED forward current reduction rate	$\Delta If/\text{C}$				-0.5				mA/ $^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	V _R				5				V	
	Connection temperature	T _J				125				°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	60			350		400		V	
	Continuous load current (AC peak/DC)	Io	500		120	150		120		mA	Connection A: AC peak/DC Connection B and C: DC
	Connection A		-	500	-	120	-	120			
	Connection B			-	1000	240		240			
	Connection C					300					
	ON current reduction rate	$\Delta Io/\text{C}$	-5		-1.2	-1.5		-1.2		mA/ $^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	Connection A		-	-5	-	-1.2	-	-1.2			
	Connection B			-	-10	-2.4		-2.4			
	Connection C					-3					
	Pulse ON current	I _{OP}	1.5		0.36	0.45		0.36		A	t=100 ms, Duty=1/10
	Connection temperature	T _J				125				°C	
	Dielectric strength between I/O (See note 1.)	V _{I-O}				2,500				Vrms	AC for 1 min
	Ambient operating temperature	T _a				-40 to +85				°C	
	Ambient storage temperature	T _{Stg}				-55 to +125				°C	With no icing or condensation
	Soldering temperature	-				260				°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram (DIP 6-pin Relays)

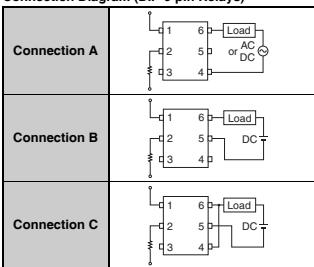


■Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-61A1 G3VM-61D1	G3VM-61B1 G3VM-61E1	G3VM-351A G3VM-351D	G3VM-351B G3VM-351E	G3VM-353A G3VM-353D	G3VM-353B G3VM-353E	G3VM-401A G3VM-401D	G3VM-401B G3VM-401E	Unit	Measurement conditions
LED forward voltage	VF	Minimum		1.0						V	I _f =10 mA
		Typical			1.15						
		Maximum			1.3						
Reverse current	I _R	Maximum			10					μA	V _R =5 V
Capacitance between terminals	C _T	Typical			30					pF	V=0, f=1 MHz
Trigger LED forward current	I _{FT} (I _{FC}) (See note 3.)	Typical	1.6		1					mA	G3VM-353A/353D/ 353B/353E : I _{OFF} =10 μA Others : I _O =Continuous load current ratings
		Maximum			3						
Release LED forward current	I _{FR} (I _{FT}) (See note 3.)	Minimum			0.1					mA	G3VM-353A/353D/ 353B/353E : I _O =150 mA Others : I _{OFF} =100 μA
High-current and dielectric-strength	R _{ON}	Typical	Connection A	1	35 (25)		15	18	17	Ω	G3VM-61A/61D/61B/ 61E/351A/351D/351B/ 351E/401A/401D/401B/ 401E : I _f =5 mA, I _O =Continuous load current ratings Values in parentheses are for $I_f < 1$ s. G3VM-353A/353D/ 353B/353E : I _O =Continuous load current ratings
			Connection B	-	0.5	28	-	8	-		
			Connection C	-	0.25	14	-	4	-		
		Maximum	Connection A	2	50 (35)		25	35			
			Connection B	-	1	40	-	14	20		
			Connection C	-	-	20	-	7	-		
Current leakage when the relay is open	I _{LEAK}	Maximum			1					μA	G3VM-353A/353D/ 353B/353E : I _f =5 mA, V _{OFF} =Load voltage ratings Others : V _{OFF} =Load voltage ratings
Capacitance between terminals	C _{OFF}	Typical	130	30	85		40			pF	V=0, f=1 MHz
Capacitance between I/O terminals	C _{i-o}	Typical			0.8					pF	f=1 MHz, Vs=0 V
Insulation resistance between I/O terminals	R _{i-o}	Minimum			1000					MΩ	V _{i-o} =500 VDC, RoHs=60%
		Typical			10 ⁸						
Turn-ON time	t _{ON}	Typical	0.8	0.3	0.1	-	0.3			ms	I _f =5 mA, R _L =200 Ω, V _{DD} =10 V (See note 2.)
		Maximum	2	-	1						
Turn-OFF time	t _{OFF}	Typical		0.1	1	-	0.1				
		Maximum	0.5	1	3	-	1				

Note: 2. Turn-ON and Turn-OFF Times

Note: 3. These values are for Relays with NC contacts



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol	G3VM-61A1 G3VM-61D1	G3VM-61B1 G3VM-61E1	G3VM-351A G3VM-351D	G3VM-351B G3VM-351E	G3VM-353A G3VM-353D	G3VM-353B G3VM-353E	G3VM-401A G3VM-401D	G3VM-401B G3VM-401E	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	48		280			320		V
		Minimum			5					
		I _f	Typical	7.5	10	-		7.5		
			Maximum		25					
Operating LED forward current		I _f								mA
Continuous load current (AC peak/DC)	I _O	Maximum	500	100		150	100	120		
Ambient operating temperature	T _a	Minimum			-20					
		Maximum			65					
										°C

G3VM-□A/□D/□B/□E


MOS FET Relays

■ Spacing and Insulation

Item	Minimum	Unit
Creepage distances	7.0	
Clearance distances	7.0	
Internal isolation thickness	0.4	mm


■ Engineering Data

● LED forward current vs. Ambient temperature

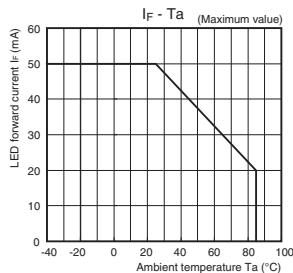

● Continuous load current vs. Ambient temperature


G3VM-61A1/61D1/61B1/61E1

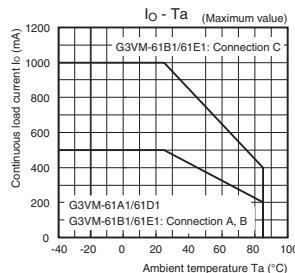

G3VM-351A/351D/351B/351E


G3VM-353A/353D/353B/353E

G3VM-401A/401D/401B/401E

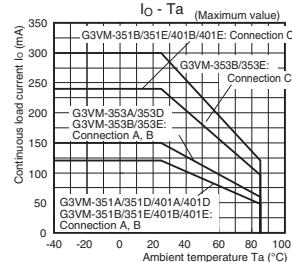

● LED forward current vs. LED forward voltage

G3VM-61A1/61D1/61B1/61E1

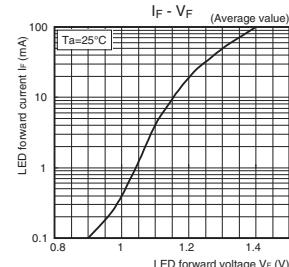


● Continuous load current vs. On-state voltage

G3VM-61A1/61D1/61B1/61E1

G3VM-351A/351D/351B/351E

G3VM-353A/353D/353B/353E


G3VM-401A/401D/401B/401E

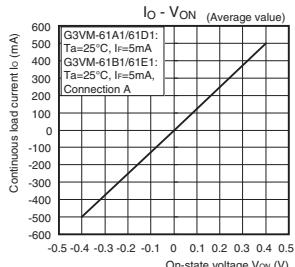

G3VM-351A/351D/351B/351E


G3VM-353A/353D/353B/353E

G3VM-401A/401D/401B/401E

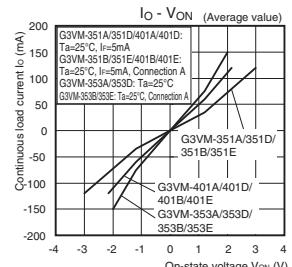

● On-state resistance vs. Ambient temperature


G3VM-61A1/61D1/61B1/61E1

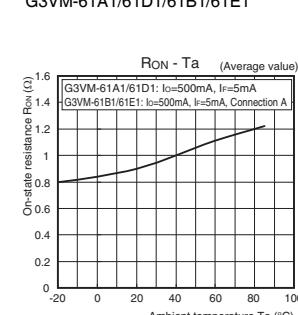


G3VM-351A/351D/351B/351E

G3VM-353A/353D/353B/353E

G3VM-401A/401D/401B/401E

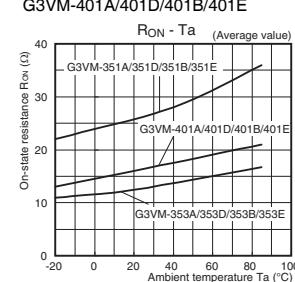

● Trigger LED forward current vs. Ambient temperature

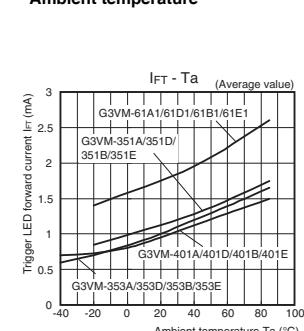

G3VM-61A1/61D1/61B1/61E1

G3VM-351A/351D/351B/351E

G3VM-353A/353D/353B/353E

G3VM-401A/401D/401B/401E

G3VM-351A/351D/351B/351E



G3VM-353A/353D/353B/353E

G3VM-401A/401D/401B/401E

■Engineering Data



● Turn ON, Turn OFF time vs. LED forward current

G3VM-61A1/61D1/61B1/61E1

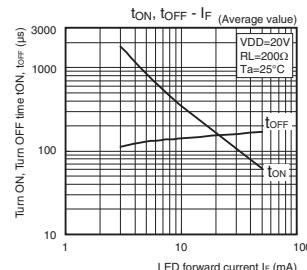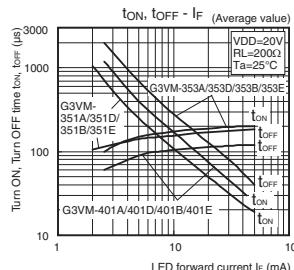
G3VM-351A/351D/351B/351E
G3VM-353A/353D/353B/353E
G3VM-401A/401D/401B/401E

● Turn ON, Turn OFF time vs. Ambient temperature

G3VM-61A1/61D1/61B1/61E1

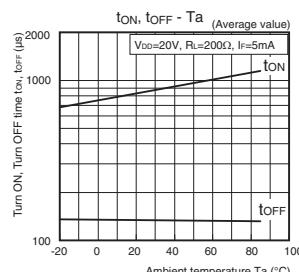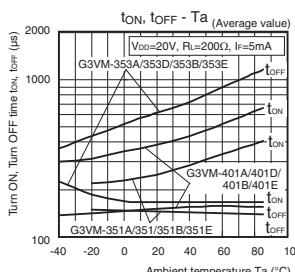G3VM-351A/351D/351B/351E
G3VM-353A/353D/353B/353E
G3VM-401A/401D/401B/401E

● Current leakage vs. Ambient temperature

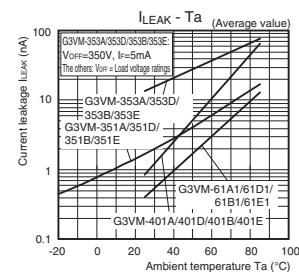


■ Appearance / Terminal Arrangement / Internal Connections


● Appearance

DIP (Dual Inline Package)



DIP 4-pin

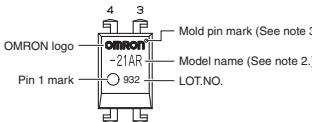

DIP 6-pin

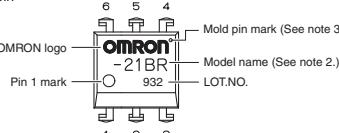

● Terminal Arrangement/Internal Connections (Top View)






Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.

Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.




Dimensions (Unit: mm)

DIP4

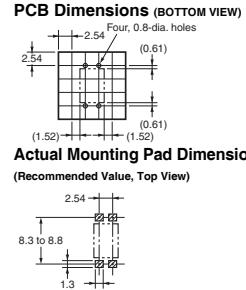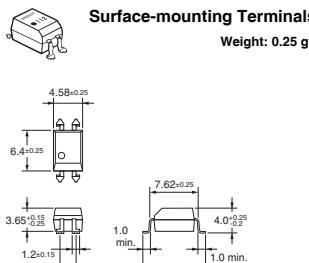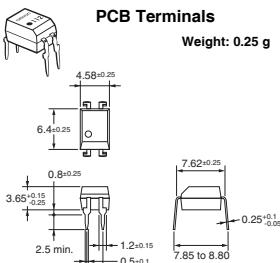

Actual Mounting Pad Dimensions
(Recommended Value, Top View)

DIP6

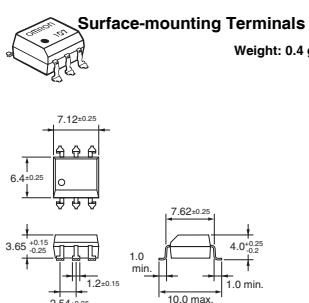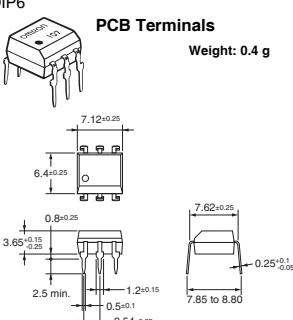

Actual Mounting Pad Dimensions
(Recommended Value, Top View)

Note: The actual product is marked differently from the image shown here.

Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-61A1 G3VM-351A G3VM-401A G3VM-353A	UL (recognized)	1a (SPST-NO)	E80555
G3VM-61D1 G3VM-351D G3VM-401D G3VM-353D		1b (SPST-NC)	
G3VM-61B1 G3VM-351B G3VM-401B G3VM-353B			
G3VM-61E1 G3VM-351E G3VM-401E G3VM-353E			

Models Certified by BSI for EN/IEC Standards

Model	Approved Standards	Contact form	File No.
G3VM-351A G3VM-351D	EN 60950/EN 60065 (BSI certified)	1a (SPST-NO)	8816 8817

Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.