


# ENERGIZER 371/370

**ZERO**MERCURY®

**SILVER OXIDE**



## Industry Standard Dimensions

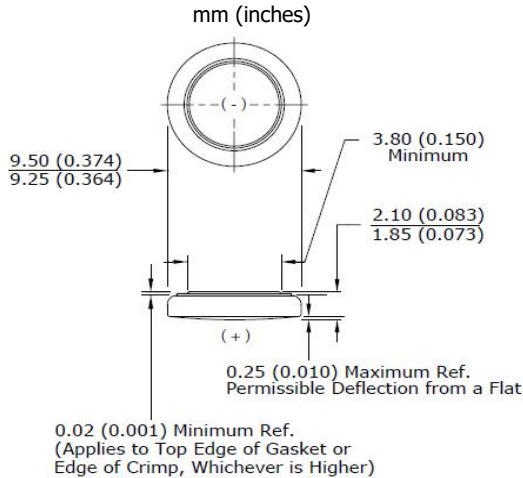


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN  
HIGH PULSE ON DEMAND

## Specifications

<b>Chemical System:</b>	Silver Oxide (Zn/Ag <sub>2</sub> O)
<b>Designation:</b>	IEC-SR69
<b>Nominal Voltage:</b>	1.55 Volts
<b>Typical Capacity:</b>	34 mAh* (to 1.5 volts)
<b>Capacity Test:</b>	33K ohm continuous drain at 21°C
<b>Typical Weight:</b>	0.7 grams (0.023 oz.)
<b>Typical Volume:</b>	0.15 cubic centimeters (0.009 cubic inch)
<b>Impedance (40 Hz):</b>	10 to 20 ohms

\* Varies according to the applied load, temperature, and cutoff voltage.


## Cross Section

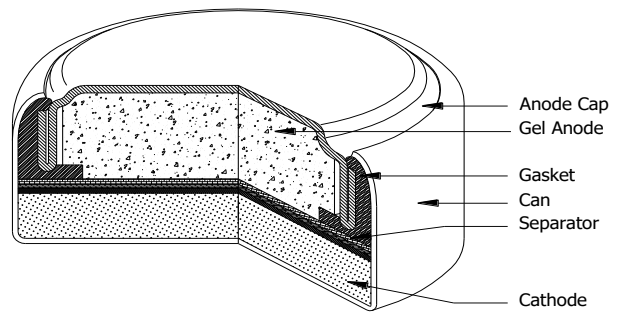

## Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

**Schedule:** Continuous  
**Typical Drain @1.47V:**  
0.045 milliamperes  
**Load:** 33K ohm

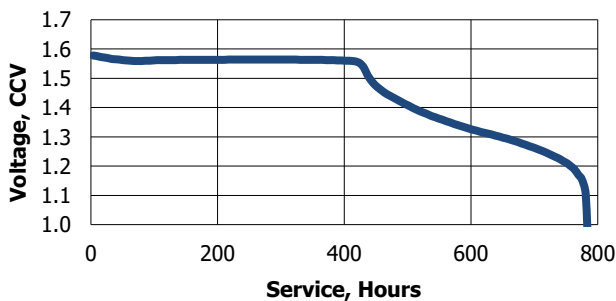


Schedule	Typical Drains at 1.47V (milliamperes)	Load (ohm)	Cutoff 1.2V (hours)
Continuous	0.045	33K	763


## Temperature Characteristics

Typical Performance at Low Discharge Rates

### Service Effects

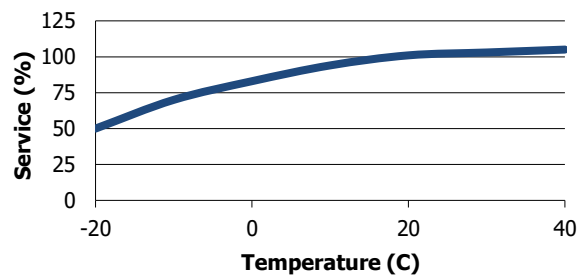

### Storage Effects

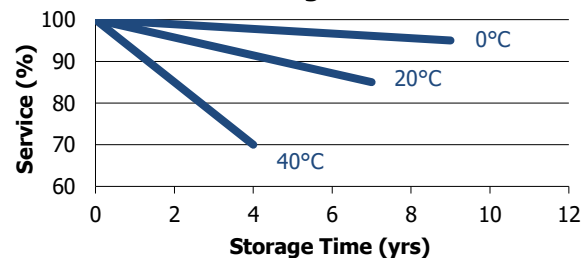

## Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
**Contents herein do not constitute a warranty and are for reference only.**