


HARTING P/N	Type of cable	Cable length(mm)
21373600F72050	PUR	5000 <sup>+200</sup> <sub>-0</sub>
21373600F72100	PUR	10000 <sup>+400</sup> <sub>-0</sub>
21373600F73050	PVC	5000 <sup>+200</sup> <sub>-0</sub>
21373600F73100	PVC	10000 <sup>+400</sup> <sub>-0</sub>

**5**

**6**

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(POWER);2A(SIGNAL)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK      PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3x18AWG+16X22AWG(CUT OFF VT,GY/BN)
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

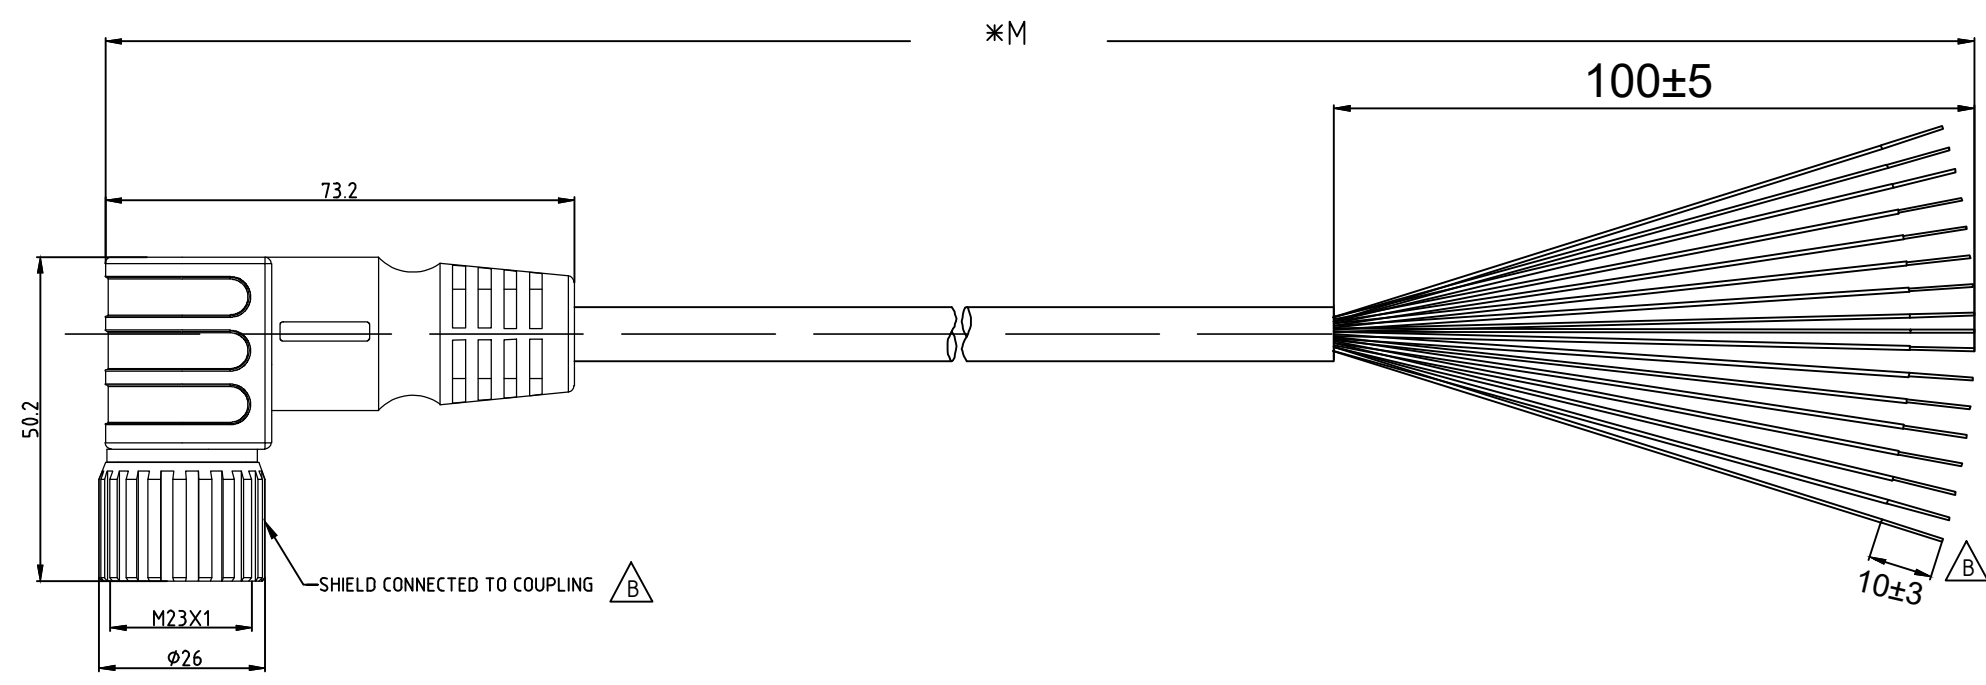

	All rights reserved	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-09-03	State Final release	
Department HCS - CN		Title M23_17P FE,Int-thread,ANG PVC/PUR cable,xxM				Doc-Key / ECM-Nr. /	
HARTING Customised Solutions		Type TB				Number 2137 36 00 F 7X XXX	
D-32339 Espelkamp		Rev. <b>B</b>				Page 1/1	

Rev.	Description	Appr.	Date
B	Revised stripping tolerance (ECN21405)	Ivy Lin	09/03/21
A	First issue.	Lucy Zheng	06/25/19