
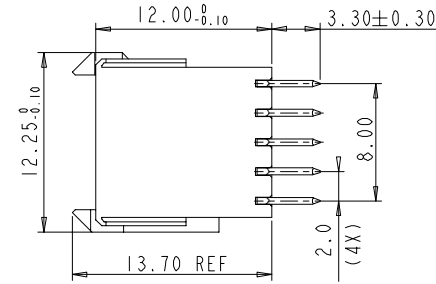
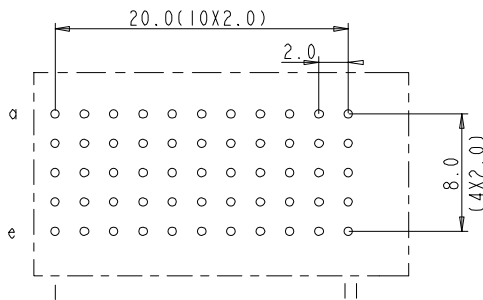
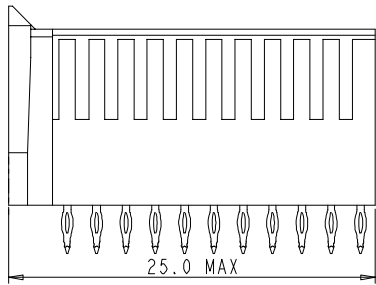


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

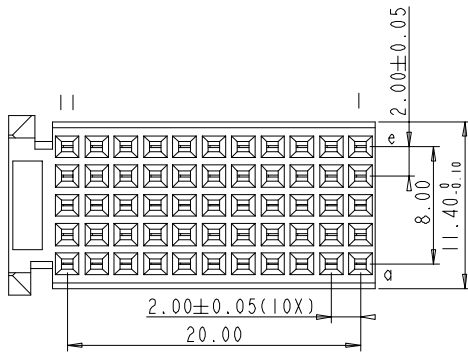

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- CURRENT RATING 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES
1. " " LEAD FREE INDICATOR :LF=LEAD FREE
 " " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
 2. THIS PRODUCT IS CSA APPROVED.
 THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.



rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0114	Alex H	27.11.04
C	DG05-0278	Kason	02-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code	Heatreat	✓	tolerance 1DEC±0.2 1DEC 2DEC±0.1 2DEC ANGLE±1° HOEKEN
Plating/Finish	Dr M.Pret		projection
Dr M.Pret	31-10-97	size A4	Scale 2.000
Eng		Product family MILLIPACS	
Chr		Model Name	ECN
Appr		Model Revision	REL Level
FCI		title	Rev. D
Pro/E file	catalog no	MILLIPACS 2/TYPE C(W/O LOC.PEG) / NO SHIELDING	dwg no BSC201907008
	HM2S30PE5100---	CUMSTOMER DRAWING	sheet 1 of 1