
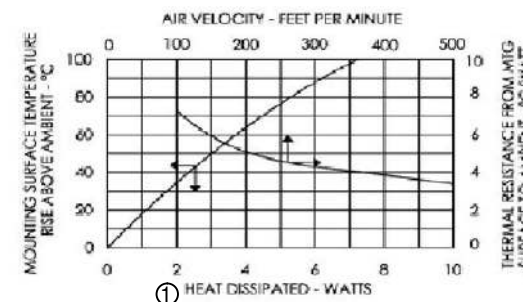


Foil IT-738 Option
Size: 14x14mm

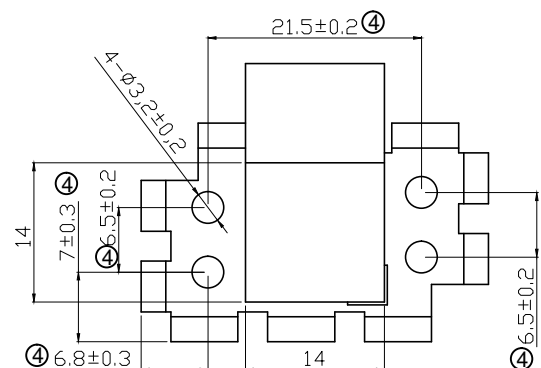

Note:
Material: AL 1050
Finish: Nature anodized
② Recommended IC size: ≤14x14mm
Recommended IC power: ≤3.5W

WSW order code:
V2199N1: w/o foil
V2199N1-F: with foil

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE		④	Add the holes position dimensions	28.07.2021	Segal	Drawn	25.01.2016	Amy
Less 10	±0.10	③	Change the structure design	29.05.2018	Segal	Approved	28.07.2021	Segal
10~30	±0.20	②	Add IC size and power in notes	22.05.2018	Amy			
31~50	±0.30	①	Add thermal resistance graph	19.02.2016	Amy			
51~120	±0.50	①	Add thermal resistance graph	19.02.2016	Amy			
DIM	Tol	①	Add thermal resistance graph	19.02.2016	Amy			
		①	Add thermal resistance graph	19.02.2016	Amy			
		①	Add thermal resistance graph	19.02.2016	Amy			
		①	Add thermal resistance graph	19.02.2016	Amy			
Angle	±1°	①	Add thermal resistance graph	19.02.2016	Amy			




Customer-No.		ASSMANN WSW-No. V2199N1-x
Drawing-No.		
ASS 4262 HS		rev04
Replace	Sheet 1 / 2	

	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

A	<table border="1" style="margin: auto;"> <thead> <tr> <th colspan="3">IT-738 Thermally Conductive Attachment Tape</th> </tr> <tr> <th>Item</th> <th>IT-738</th> <th>Test Method</th> </tr> </thead> <tbody> <tr> <td>Color</td> <td>White</td> <td>Visual</td> </tr> <tr> <td>Thickness</td> <td>0.375mm</td> <td>ASTM D374</td> </tr> <tr> <td>Thickness tolerance</td> <td>±10%</td> <td>/</td> </tr> <tr> <td>Construction & Composition</td> <td>High performance Ceramic filled acrylic pressure-sensitive adhesive</td> <td>Visual</td> </tr> <tr> <td>Thermal Conductivity (W/mk)</td> <td>1.2</td> <td>ASTM D5470</td> </tr> <tr> <td>Peel Strength 90° on aluminum</td> <td>3000 g</td> <td>ASTM D1000</td> </tr> <tr> <td>Holding Power 1kg@Room Temp using 1 in²</td> <td>1 week PASS</td> <td>PSTC-107</td> </tr> <tr> <td>Dielectric Strength</td> <td>668 Volts/mil</td> <td>ASTM D-149</td> </tr> <tr> <td>Holding Power 500g@70°C using 1 in²</td> <td>1 week PASS</td> <td>PSTC-107</td> </tr> <tr> <td>Continuous Use Temp</td> <td>-30°C to 150°C</td> <td>/</td> </tr> <tr> <td>Voltage Breakdown</td> <td>>5KV</td> <td>SSTM D149</td> </tr> <tr> <td>RoHS Compliant</td> <td>YES</td> <td>SGS</td> </tr> <tr> <td>REACH Compliant</td> <td>YES</td> <td>SGS</td> </tr> <tr> <td>Flammability Rating</td> <td>V-0</td> <td>UL 94</td> </tr> </tbody> </table>							IT-738 Thermally Conductive Attachment Tape			Item	IT-738	Test Method	Color	White	Visual	Thickness	0.375mm	ASTM D374	Thickness tolerance	±10%	/	Construction & Composition	High performance Ceramic filled acrylic pressure-sensitive adhesive	Visual	Thermal Conductivity (W/mk)	1.2	ASTM D5470	Peel Strength 90° on aluminum	3000 g	ASTM D1000	Holding Power 1kg@Room Temp using 1 in ²	1 week PASS	PSTC-107	Dielectric Strength	668 Volts/mil	ASTM D-149	Holding Power 500g@70°C using 1 in ²	1 week PASS	PSTC-107	Continuous Use Temp	-30°C to 150°C	/	Voltage Breakdown	>5KV	SSTM D149	RoHS Compliant	YES	SGS	REACH Compliant	YES	SGS	Flammability Rating	V-0	UL 94	A
IT-738 Thermally Conductive Attachment Tape																																																								
Item								IT-738	Test Method																																															
Color								White	Visual																																															
Thickness								0.375mm	ASTM D374																																															
Thickness tolerance								±10%	/																																															
Construction & Composition								High performance Ceramic filled acrylic pressure-sensitive adhesive	Visual																																															
Thermal Conductivity (W/mk)								1.2	ASTM D5470																																															
Peel Strength 90° on aluminum								3000 g	ASTM D1000																																															
Holding Power 1kg@Room Temp using 1 in ²								1 week PASS	PSTC-107																																															
Dielectric Strength								668 Volts/mil	ASTM D-149																																															
Holding Power 500g@70°C using 1 in ²								1 week PASS	PSTC-107																																															
Continuous Use Temp								-30°C to 150°C	/																																															
Voltage Breakdown								>5KV	SSTM D149																																															
RoHS Compliant								YES	SGS																																															
REACH Compliant	YES	SGS																																																						
Flammability Rating	V-0	UL 94																																																						
B	B																																																							
C	C																																																							
D	D																																																							
E	E																																																							
F	F																																																							

RoHS compliant
Unit: mm

G	Scale	Free					Date	Name	Customer-No.	G		
	TOLERANCE	④	Add the holes position dimensions	28.07.2021	Segal	Drawn	25.01.2016	Amy	ASSMANN WSW-No. V2199N1-x			
Less 10	±0.10	③	Change the structure design	29.05.2018	Segal	Approved	28.07.2021	Segal				
10~30	±0.20	②	Add IC size and power in notes	22.05.2018	Amy							
H	31~50	±0.30	①	Add thermal resistance graph	19.02.2016	Amy			Drawing-No.	ASS 4262 HS	rev04	
	51~120	±0.50	①	Add thermal resistance graph	19.02.2016	Amy			Replace			Sheet
	DIM	Tol	①	Drawn	25.01.2016	Amy						2 / 2
	Angle	±1°	Id.	Modification	Date	Name						

	1	2	3	4	5	6	7	KT2113
--	---	---	---	---	---	---	---	--------