


molex

INSULATION DISPLACEMENT CABLE:
0.050" PITCH, 28 AWG, STRANDED EXTRUDED FEP

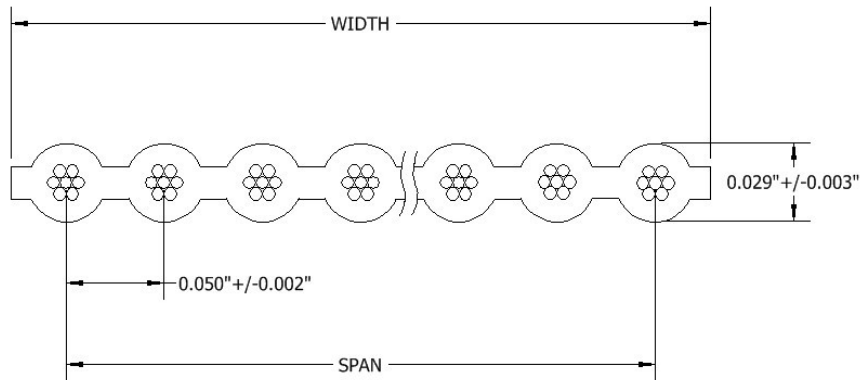

Cond. No.	Part Number	Span	Width
4	1000570374	0.150" ± 0.005"	0.200" ± 0.007"
5	1000570067	0.200" ± 0.005"	0.250" ± 0.007"
6	1000570375	0.250" ± 0.005"	0.300" ± 0.007"
8	1000570376	0.350" ± 0.007"	0.400" ± 0.007"
9	1000570396	0.400" ± 0.007"	0.450" ± 0.007"
10	1000570377	0.450" ± 0.007"	0.500" ± 0.007"
16	1000570378	0.750" ± 0.007"	0.800" ± 0.007"
20	1000570379	0.950" ± 0.010"	1.000" ± 0.010"
26	1000570176	1.250" ± 0.010"	1.300" ± 0.010"
50	1000570205	2.450" ± 0.010"	2.500" ± 0.010"

CHARACTERISTICS	
Conductor	28 AWG, 7/36, Silver Plated Copper
Insulation	FEP
Color	Blue
Impedance (ohms)	115 Unbalanced 165 Balanced
Capacitance (pF/ft)	10.5 Unbalanced 6.0 Balanced
Inductance (uH/ft)	0.14 Unbalanced 0.16 Balanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	-55°C to 200°C

STANDARD PACKAGING

100 ft./spool, 10 Ft. minimum length

UL STYLE 20424