


TECHNICAL DATA SHEET

Part#: 500-108-US

Pliers - Cut & Bend -- Carbon Steel - Cuts lead .06"/bends 45°
Designed to bend leads to 45°, then cut the lead to .060" keeping component in place when soldering

The 500-108-US 5" shear cutting and bending plier is designed to bend leads to 45 degrees, then cut the lead to .060" keeping component in place when soldering. It's recommended cutting capacity is 22AWG (.025" diameter). It features an ergonomically molded antimicrobial grip (10¹⁰ ohms/sq surface resistivity) with dual leaf springs. antimicrobial (10⁸ ohms/sq) ergonomic Anti-Static grips with dual leaf springs.

• Precision Level	★★★★★
• Material	Carbon
• Surface Resistivity	10 ¹⁰ ohms/sq
• Shape	Straight
• Type of Cut	Shear
• Cutting Capacity	.025"
• Blade Angle	
• Blade Length	.032"
• Body Width	0.42" (10.5mm)
• Body Height	
• OAL	5.5" (137.5mm)
• Weight (OZ)	5
• UPC	662847006906
• Schedule B	8203.20.60.30
• ECCN	EAR99
• UNSPSC Code	
• Country of Origin	USA
• Group	Cutters/Clinch-Bend

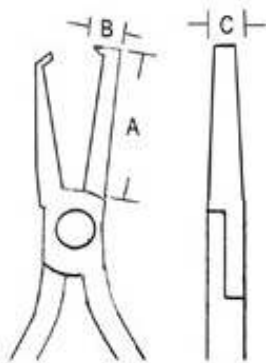

EXCELTA
CORPORATION

500-108-US
Shear Cutter & Bender

A= .750"
B= .170"
C= .150"