


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00052	Connector, dc plug, 3.2x0.9xL20.2mm, molding style, spring contacts	1	
2	50-00597	Connector, dc jack, 3.2x0.09xL16.5mm, molding style, spring contacts	1	
3	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
4	24-00002	Overmold, PVC	1	black
5	24-00005	Overmold, PVC	1	black

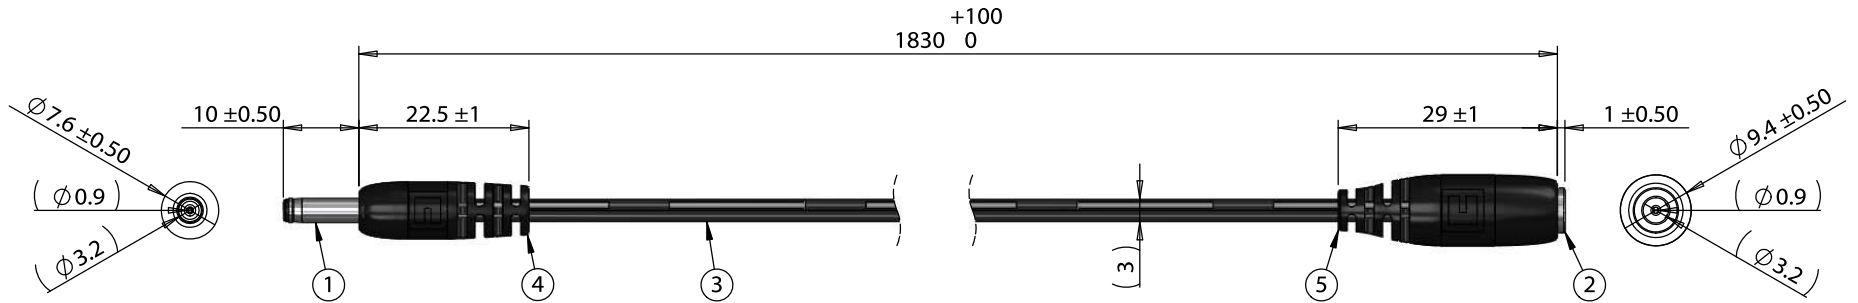

**Notes:**  
Functionally equivalent components may be substituted

Wiring Diagram		
50-00052	wire color	50-00597
center	black with stripe	center
sleeve	black	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	01/26/2018	Initial release	GL <small>Digitally signed by GL Date: 2018.03.07 09:42:01 -08'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	
			JP <small>Digitally signed by JP Date: 2018.03.07 10:42:58 -08'00'</small>	Description:	Size: Part number:
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 1830 mm, 3.2x0.9x10 mm 50-00052 dc plug to 3.2x0.9 mm 50-00597 dc jack, 24 AWG, 30-00404 wire	A 10-02526
					Scale: 1:1  Sheet 1 of 1

5

4

3

2

1