SPECIFICATIONS


"Preliminary data"

CR0812HB-D9*GP **Model Number:**





Mechanical Drawing:

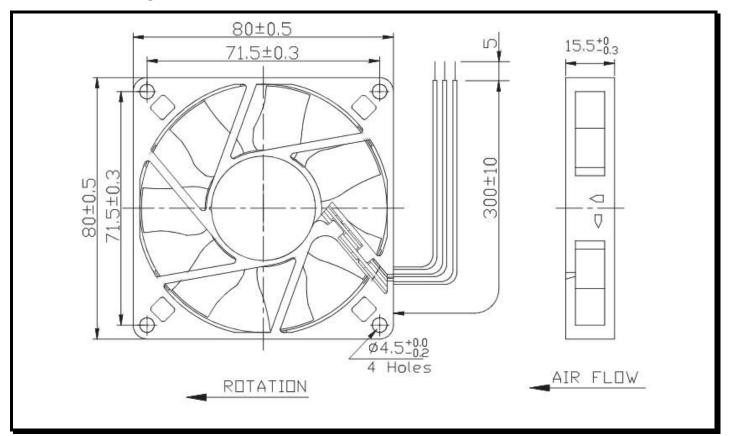

Motor:

Nominal Voltage = 12 VDC Nominal Running Current = 0.13 AmpsPower Input = 1.56 Watts Speed = 3000 RPMBearings = Ball

Air Flow = 35.52 CFMStatic Pressure: = 0.13 Inch of H2O Acoustic $= 35.8 \, dB(A)$

Weight = 63.0 g

Construction:

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

This fan is designed for continuous duty life of 70,000 hours at 40°C.

Additional Features:

Brushless DC Motor Locked Rotor Protection Polarity Protected

Automatic Restart Capability

Version:

Operating Temperature: -10° C to 70° C Storage Temperature: -40° C to 70° C

Termination:

 300 ± 10 mm Lead wires, AWG 24, UL 1007

Agency Approvals: UL, CUL, TUV, CE