

# SMD Power Inductor 0420CDMC/DS




**Halogen Free**


## Description

- Magnetically shielded.
- L × W × H: 4.75 × 4.35 × 2.0 mm Max.
- Product weight: 0.17g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Dimension - [mm]

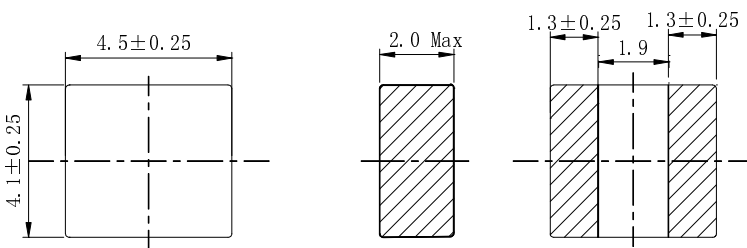

## Land pattern and Schematics - [mm]

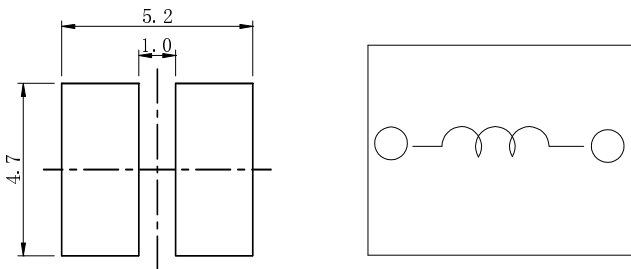

## Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 3000pcs per reel

## Applications

- Ideally used in notebook, ultra book, tablet PC, LCD display, SSD and other low profile high current application.

## Electrical Characteristics


Part No.	Stamp	Inductance [Within]( $\mu$ H) ※1	D.C.R (m $\Omega$ ) at 25°C	Saturation current [Typ.](A) ※2	Temperature rise current [Typ.](A) Thermocouple Method ※3
0420CDMCDS-R22MC	R22	0.22 ±20%	5.3 ±20%	15.0	10.0
0420CDMCDS-R33MC	R33	0.33 ±20%	6.0 ±20%	12.6	8.9
0420CDMCDS-R47MC	R47	0.47 ±20%	8.2 ±20%	11.0	8.1
0420CDMCDS-1R0MC	1R0	1.0 ±20%	17 ±20%	6.8	5.5
0420CDMCDS-1R5MC	1R5	1.5 ±20%	23 ±20%	5.8	5.1
0420CDMCDS-2R2MC	2R2	2.2 ±20%	35 ±20%	4.5	4.7
0420CDMCDS-3R3MC	3R3	3.3 ±20%	49 ±20%	4.1	3.5
0420CDMCDS-4R7MC	4R7	4.7 ±20%	67 ±20%	3.4	3.1
0420CDMCDS-6R8MC	6R8	6.8 ±20%	91 ±20%	2.8	2.6
0420CDMCDS-100MC	100	10.0 ±20%	148 ±20%	2.3	2.1
0420CDMCDS-220MC	220	22.0 ±20%	316 ±20%	1.6	1.5

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of DC current when the inductance is over 80% of the initial value. (at 25°C)


※3. Temperature rise current: The actual value of DC current when the top surface temperature of test sample rise is  $\Delta T = 40^\circ\text{C}$  ( $T_a = 25^\circ\text{C}$ ).

# SMD Power Inductor 0420CDMC/DS

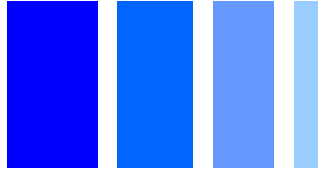

## Saturation Current & Temperature Rise Graph



— L (20°C)      —  $\Delta T$

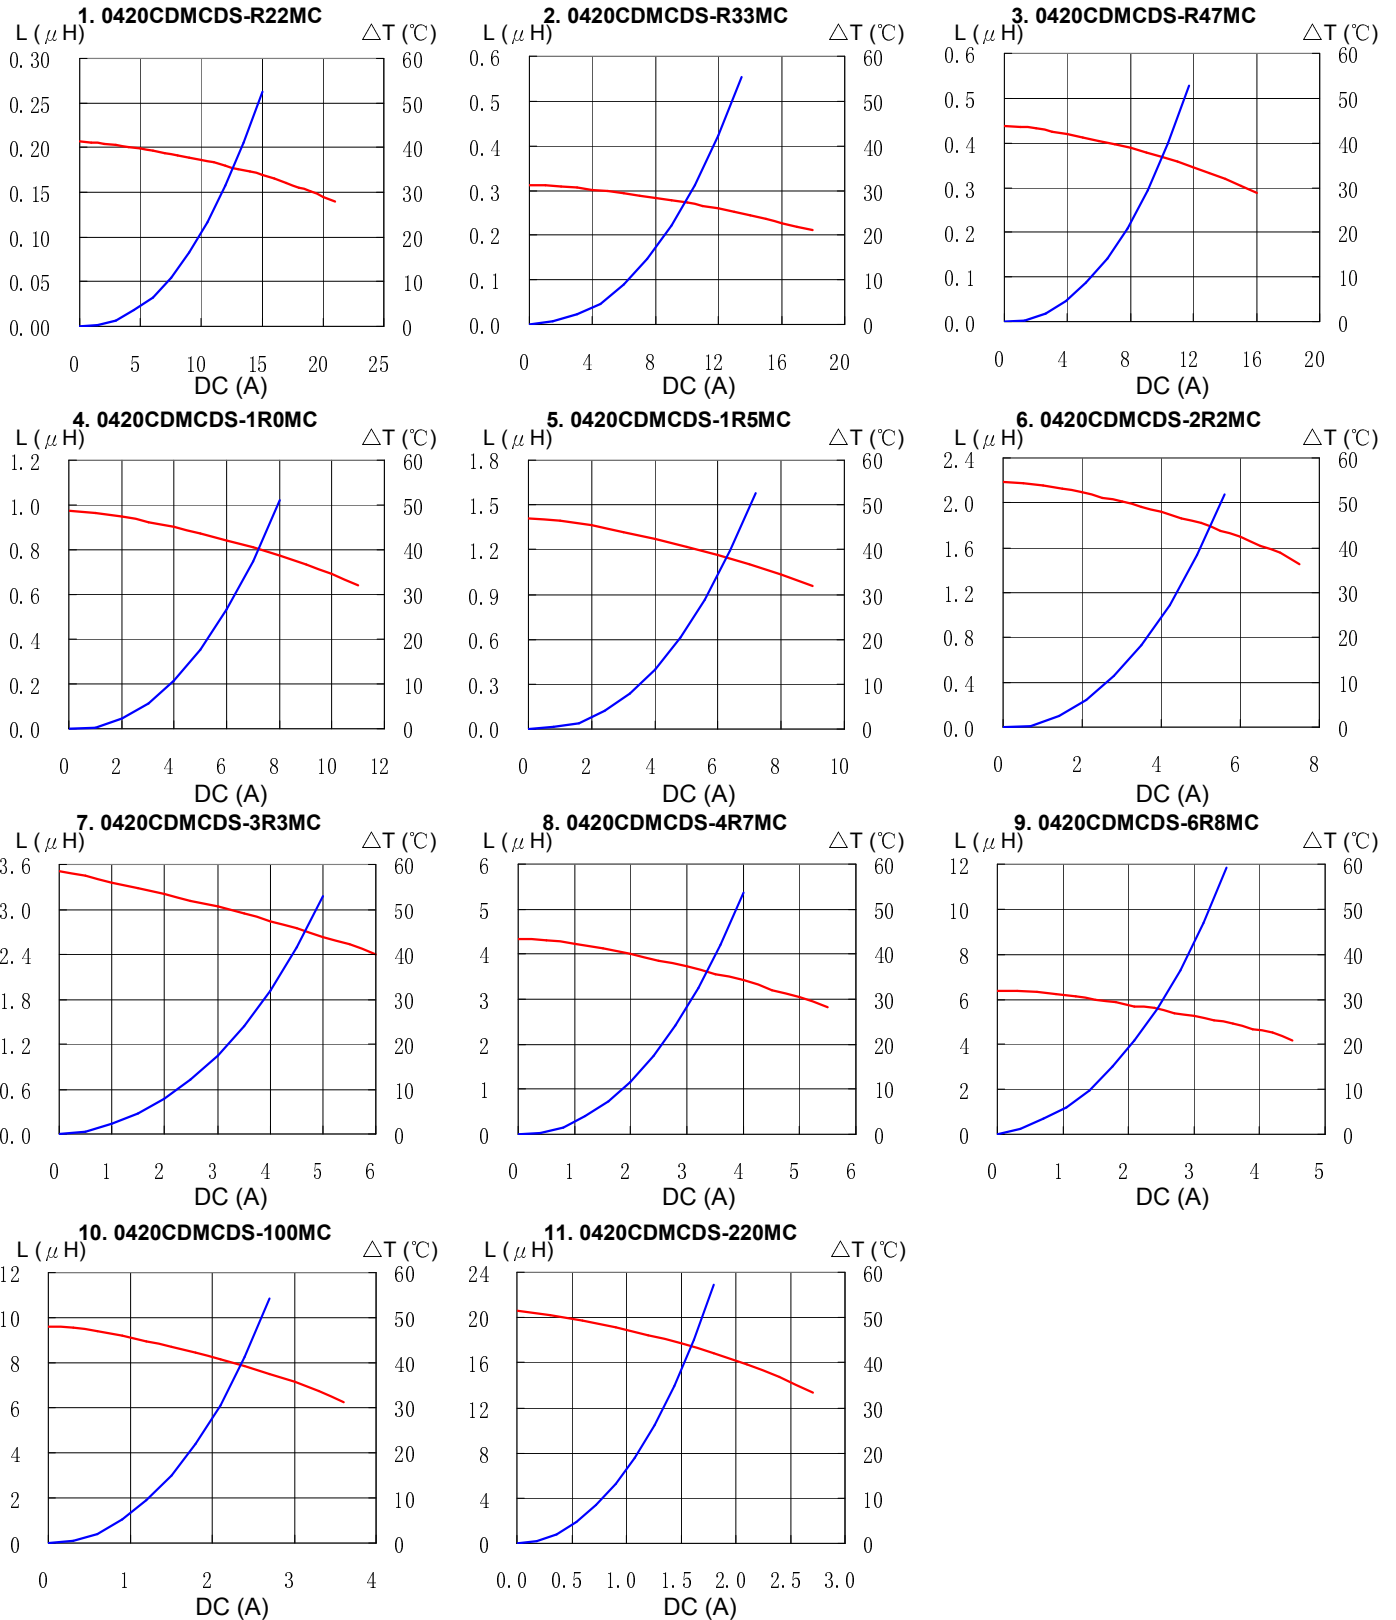

# SMD Power Inductor 0420CDMC/DS



## Solder Reflow Condition

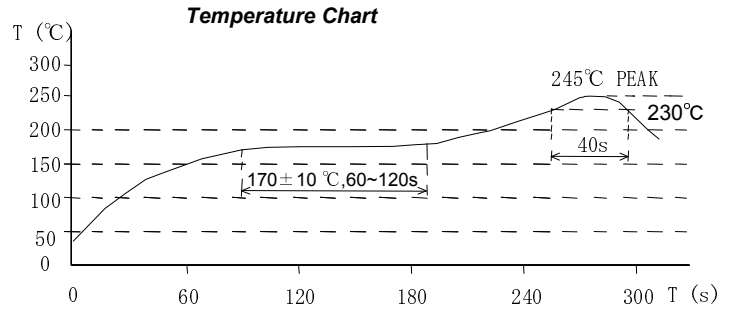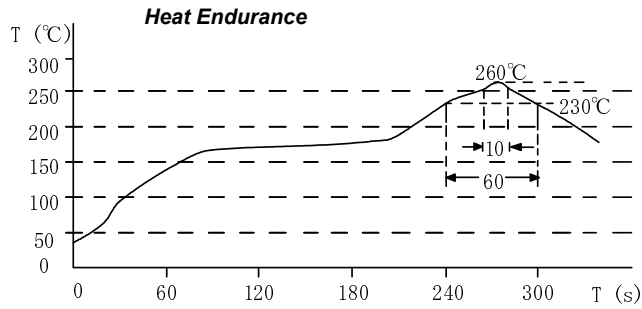

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6688  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel.+81-3-5202-7112  
FAX.+81-3-5202-7105  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-021-5836-3299  
FAX.+86-021-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6296-3390  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)