
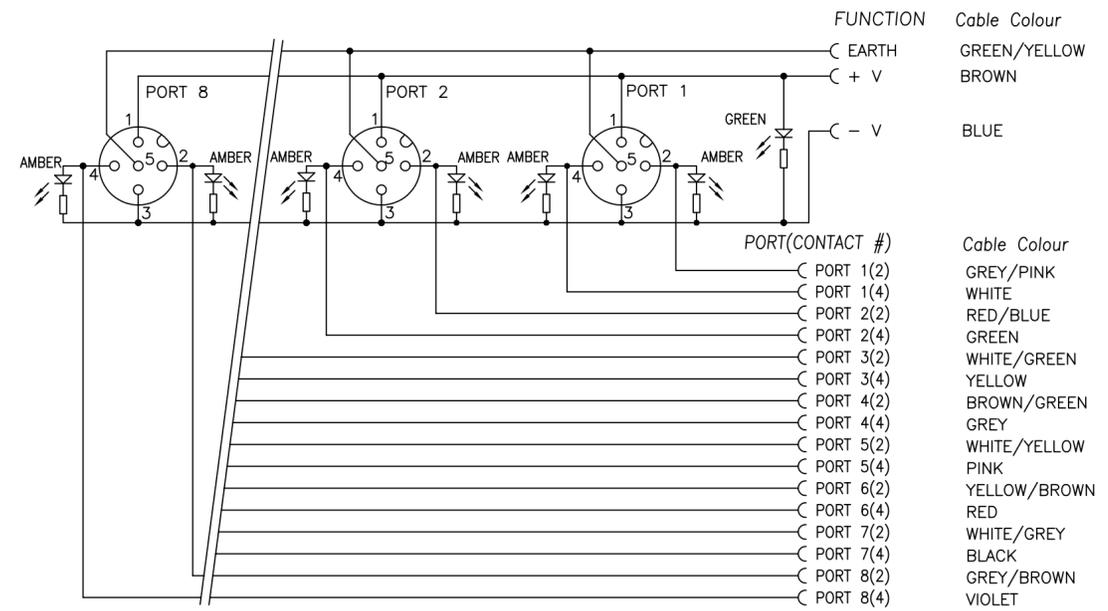
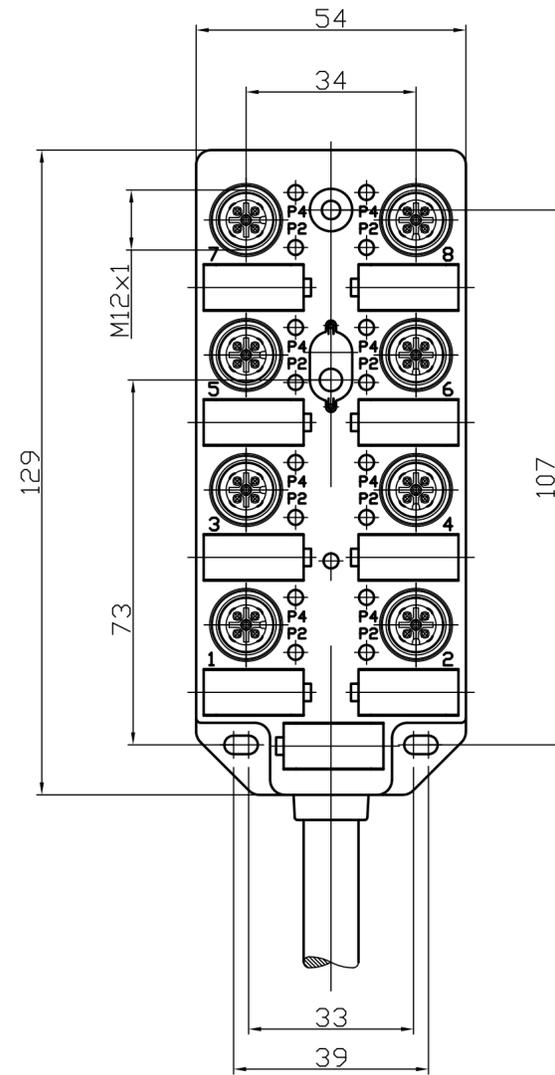


SAP-NUMBER	OLD ENGINEER.-No.	DESCRIPTION	COLOR	FINISHED LENGTH in mm
1201195003	BKY803P-FBP-05	ULTRA-MPIS-8W-16I/O-5M-PUR	YELLOW	5000 ±50

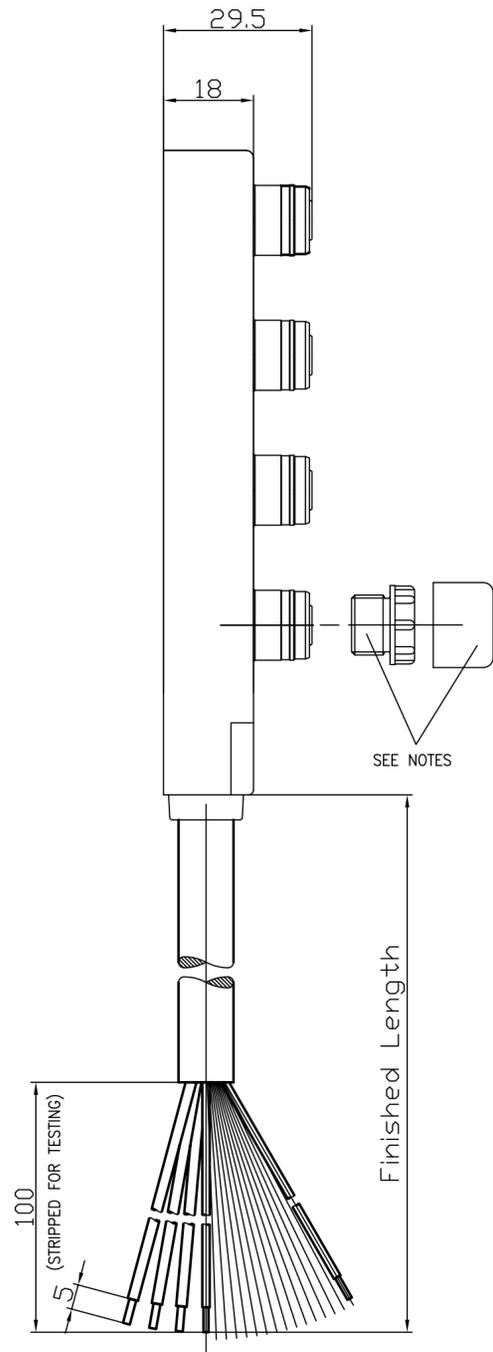

SPECIFICATION

MATERIALS:

HOUSING & INSERT: PBT
 COUPLING: BRASS-NICKEL PLATED
 O-RING: VITON
 ELECTRICAL:
 VOLTAGE: 10-30VDC
 CURRENT RATING: 4A PER PORT, 12 AMPS MAX.
 PROTECTION CLASS: IP68

NOTES:

THREADED PLUG FITTED TO PORTS 1 & 2 ONLY
 PROTECTION CAP FITTED TO ALL M12 PORTS
 FIXING HOLES TO SUIT M4 SCREWS

DESCRIPTION EC NO: WEU2010-0329 DRWN: REISSNER 2010/02/23 CHKD: FP APPR: NSTAUDIG 2010/02/25	QUALITY SYMBOLS ▽ = 0 ◻ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		mm	INCH	DRAWN BY	DATE	ULTRA-MPIS-8W-16 I/O-5M -PUR				
		4 PLACES ±---	±---	REISSNER	2010/02/23					
		3 PLACES ±---	±---	CHECKED BY	DATE	MOLEX INCORPORATED				
		2 PLACES ±---	±---	APOHL	2010/02/23					
1 PLACE ±0.3	±---	APPROVED BY	DATE	MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		see table		SD-120119-030		1 OF 1		
1	REV	SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						